


No.	DESCRIPTION	MATERIAL DESCRIPTION
1	BODY	CAST LOW LEAD BRASS ALLOY
2	CAP	CAST BRASS ASTM B62 ALLOY C83600
3	STEM	LOW LEAD BRASS ALLOY
4	BALL	LOW LEAD BRASS ALLOY
5	GASKET	ASTM D2000 (NITRILE)
6	SOLID PIN	AISI 303 STAINLESS STEEL
7	O-RING	ASTM D2000 (EP)
8	END PIECE	CAST LOW LEAD BRASS ALLOY
9	O-RING	ASTM D2000 (EP)
10	GASKET SUB	ASTM D2000(SBR)&410 STAINLESS STEEL

SIZE	ØA	B	C	D	E
3/4"	.75	4.23	3.21	2.32	.89
1"	1.00	4.96	3.97	2.82	1.15

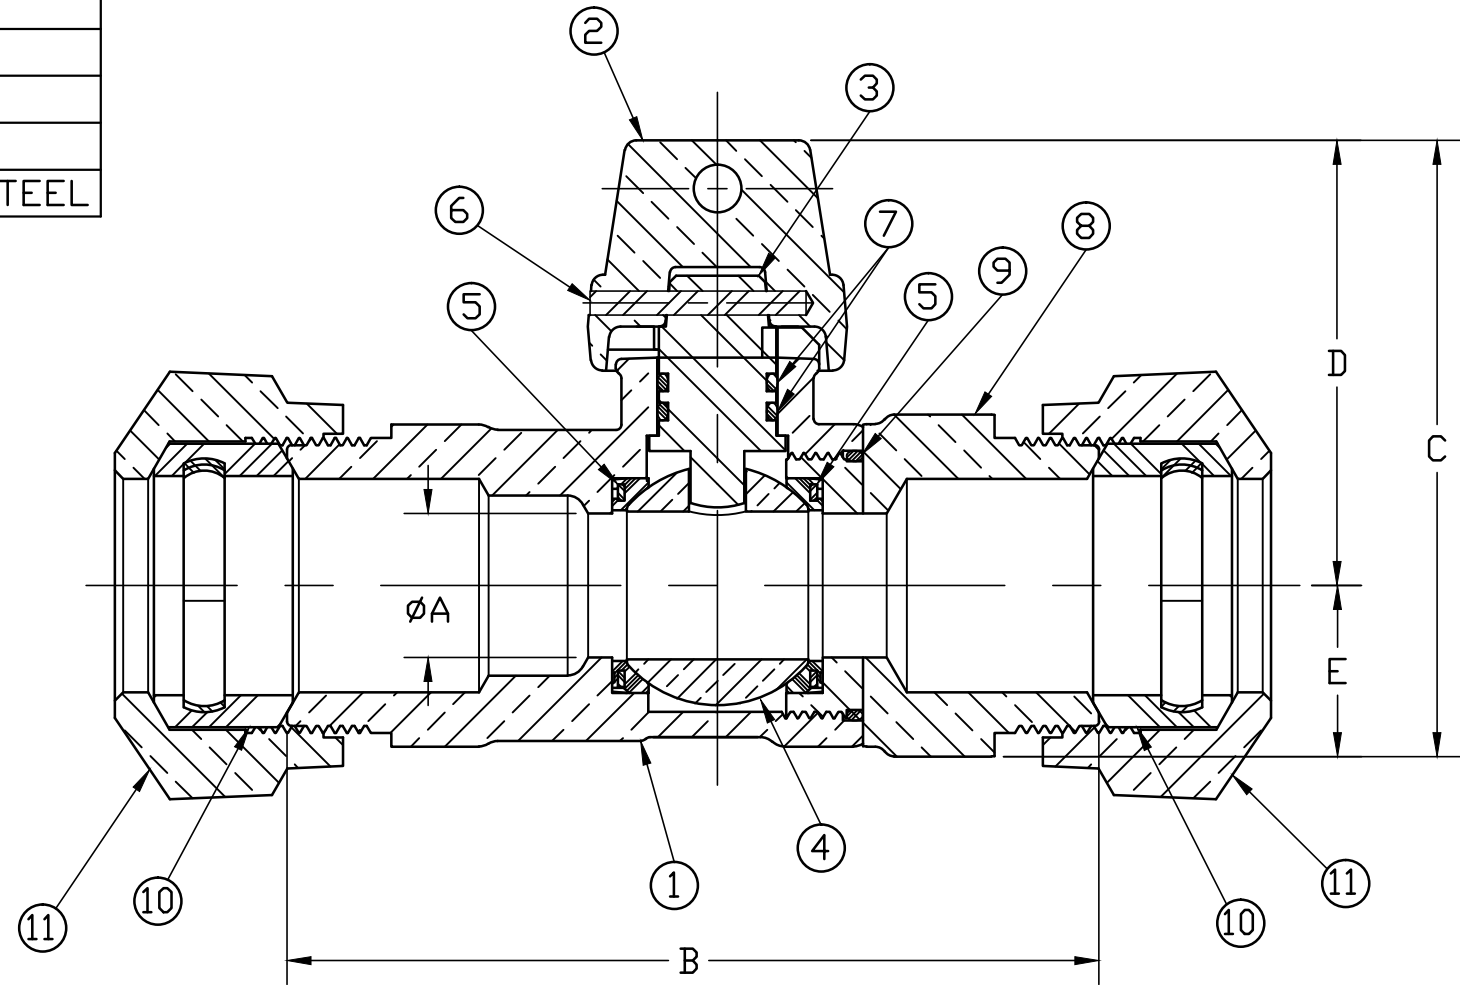

ALL WETTED PARTS ARE LOW LEAD BRASS ALLOY

FILEPATH: PROD-ENG\MUELLER\ASYSUBMITTALS\B25211

						DRFTR	RWB	5/4/15	<b>Mueller Co.</b>		UNLESS OTHERWISE NOTED THIRD ANGLE PROJECTION		
						CHKR							SURFACE PREPARATION: BREAK CORNER(S) ---- .000 SURFACE FINISH -- xx RMS
						ENGR					TOLERANCE(S): LINEAR ----- ± .000 ANGULAR ----- ± 0°00'	FULL	
						MGR							BY
									STK No:				
									MAT'L:				
									DESCR.				
									INLINE LLB BALL CURB VALVE				
									110 IPS-PE x 110 IPS-PE				
											DWG NUMBER		
											B25211N		
									PER EST NO: DXXXX EST FIN WT = 0.0000 lbs				

DWG NUMBER  
B25211N