



Reliable Connections™


Hydrant-Defender®
Hydrant Security Device

Installation Instructions:

Step 1 - Set top piece of vertical strap on operating nut and insert side piece into slot provided to achieve a secure fit. Swing side piece over hose nozzle as shown. Repeat for opposite side.



Step 2 - Place front piece of horizontal strap over pumper nozzle and insert horizontal side piece into slot provided to achieve a secure fit. Swing side piece over hose nozzle, capturing the vertical strap underneath. Repeat for opposite side.

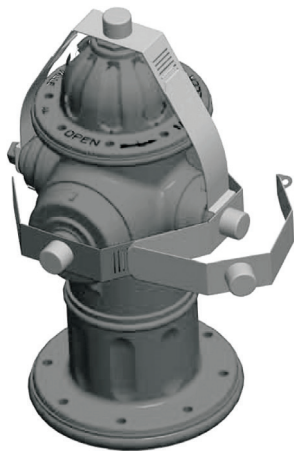

Step 3 - Secure rear tab in the tightest slot possible and insert lock into the tab.



Phone: (800) 423-1323

By deviating from the above listed instructions, you will void any product warranty and release Mueller Co. and its affiliated entities from any and all liability associated with the installation or use of this product. For details on the product's warranty, terms, and conditions, please visit www.muellercompany.com.

© 2016 Mueller Co., LLC. All rights reserved.

Form 12376 03/16