

# ***STORZ***

## Quick Connect Pumper Nozzles



**Mueller Canada**

# STORZ


## Quick Connect Pumper Nozzles & Adapters

The STORZ type of quick-connect pumper connection for fire hydrants has been in use in Canada for over fifteen years, and has been rapidly growing in popularity for the last ten. The STORZ connection design provides a simple, effective, and, most important in an emergency situation, quick means of hooking a pumper truck to a hydrant. Instead of lining up a female-threaded hose with a male-threaded nozzle, and then turning the fitting five or six complete revolutions to tighten it, the STORZ coupling is simply inserted and requires only a quick quarter-turn to make the connection.


STORZ connections have become the standard pumper nozzle in Canada. Many major towns and cities from coast to coast have included the STORZ pumper nozzle in their specifications. All Mueller Canada STORZ nozzles and adapters conform to Underwriters Laboratories of Canada Standard S520.

All of Mueller Canada's fire hydrant models are available with the STORZ pumper connection option, within normal production lead times. STORZ nozzles are in stock at the factory, ready for installation.

### STORZ PUMPER NOZZLE

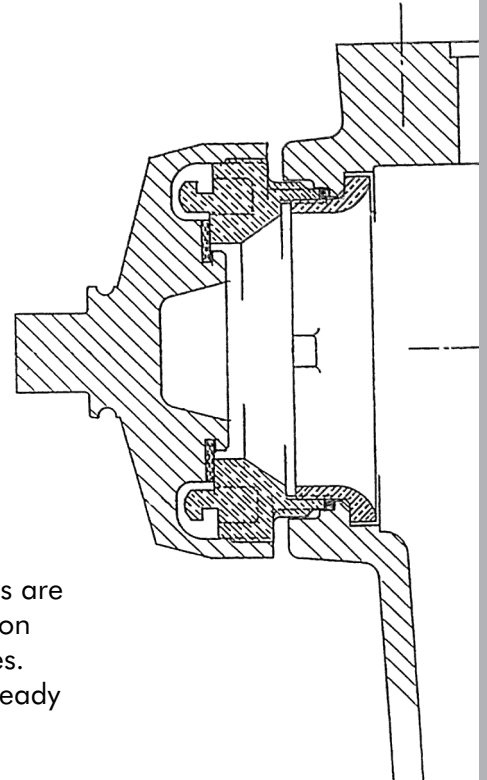

### STORZ PUMPER ADAPTER

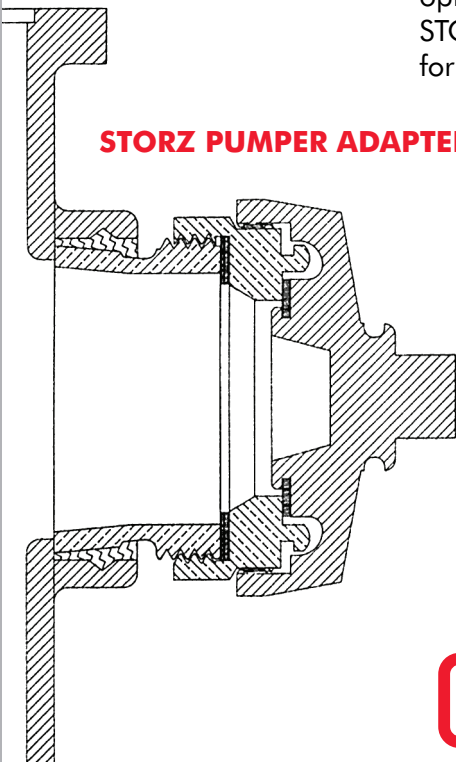

For hydrants that are already in service, a STORZ PUMPER CONNECTION ADAPTER is available to allow quick, economical conversion to the use of STORZ connections on ANY make or model of hydrant. STORZ adapters are designed to thread directly to your existing hydrant's pumper nozzle and are secured with 3 set screws to ensure a secure, permanent, trouble-free connection. The Mueller Canada STORZ adapter adds less than 1" to the pumper nozzle's projection from the hydrant body, making for a neat, unobtrusive appearance.

# Mueller Canada

Certified ISO 9002