


No.	DESCRIPTION	MATERIAL
1	STEM	LOW LEAD BRASS ALLOY
2	O-RING	EPDM ASTM D2000
3	BALL	LOW LEAD BRASS ALLOY
4	GASKET - SEAL	NITRILE ASTM D2000
5	BODY	CAST LOW LEAD BRASS ALLOY
6	O-RING	EPDM D2000
7	END PIECE	CAST LOW LEAD BRASS ALLOY
8	COPPER GASKET	COPPER SHEET ASTM B152 UNS C11000
9	INSTA-TITE BODY	CAST LOW LEAD BRASS ALLOY
10	O-RING	EP ASTM D2000
11	GRIP RING	CELCON M90 NATURAL CF2001
12	CAP	CAST BRASS ASTM B62 ALLOY C83600
13	COTTER PIN	STAINLESS STEEL
14	SILICON CAP	SILICON RUBBER

SIZE	ØA	B	C	D	E
3/4	.75	3.95	.84	2.12	2.96

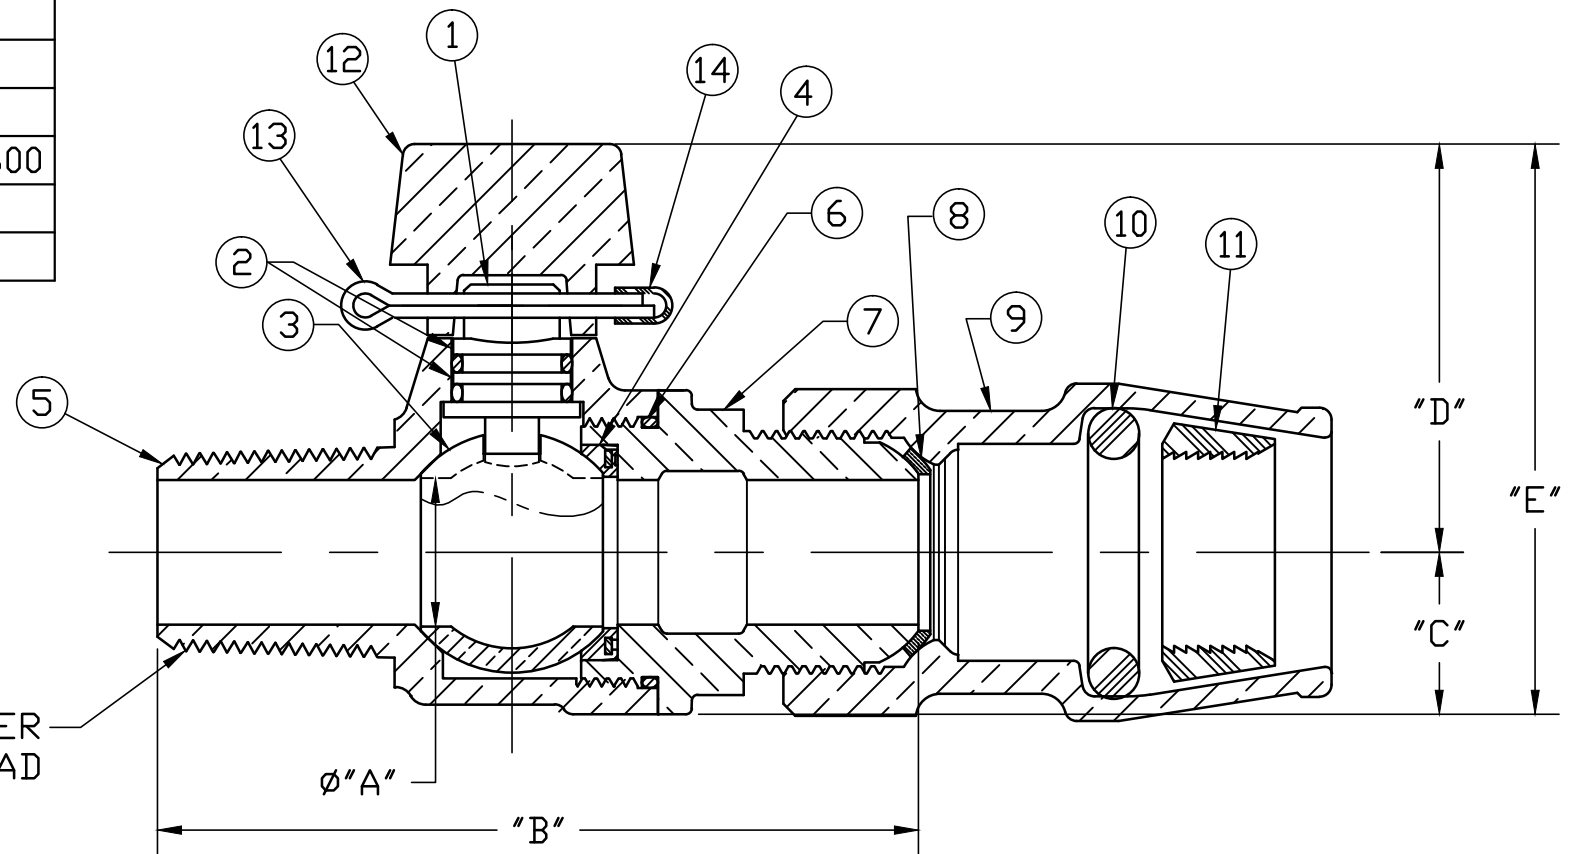

ALL WETTED PARTS ARE LOW LEAD BRASS ALLOY

FILEPATH: PROD-ENG\MUELLER\ASYSUBMITTALS\B2502600N

DRFTR	RWB	6/26/15	Mueller Co.		
CHKR					
ENGR					
MGR					
UNLESS OTHERWISE NOTED			THIRD ANGLE PROJECTION		
SURFACE PREPARATION:					
BREAK CORNER(S) ---- .000					
SURFACE FINISH -- XX RMS			REF. No.	SCALE	
TOLERANCE(S):			NONE		
LINEAR ----- ± .000					
ANGULAR ----- ± 0°00'					
BY			DATE		
STK No:					
MAT'L:					
DESCR. BALL LLB CORPORATION VALVE W/ DETACHABLE T-HEAD CAP ("AWWA IP" x IPS PE)					
DWG NUMBER B2502600N					
REV	ECR	DESCRIPTION	DATE	BY	CHKR
PER EST NO: DXXXX EST FIN WT = 0.0000 lbs					

DWG NUMBER
 B2502600N
 442-MRKTG

TITLE TO AND OWNERSHIP OF THIS ENGINEERING DATA REMAINS IN Mueller Co. NO USE IS TO BE MADE OF THIS DATA EXCEPT AS SPECIFICALLY AUTHORIZED BY Mueller Co. ASSENT ON THE PART OF THE RECIPIENT TO THESE CONDITIONS IS PRESUMED