



No.	DESCRIPTION	MATERIAL
1	STEM	LOW LEAD BRASS ALLOY
2	O-RING	EPDM ASTM D2000
3	BALL	LOW LEAD BRASS ALLOY
4	GASKET - SEAL	NITRILE ASTM D2000
5	BODY	CAST LOW LEAD BRASS ALLOY
6	O-RING	EPDM D2000
7	END PIECE	CAST LOW LEAD BRASS ALLOY
8	COPPER GASKET	COPPER SHEET ASTM B152 UNS C11000
9	INSTA-TITE BODY	CAST LOW LEAD BRASS ALLOY
10	O-RING	EP ASTM D2000
11	GRIP RING	CELCON M90 NATURAL CF2001

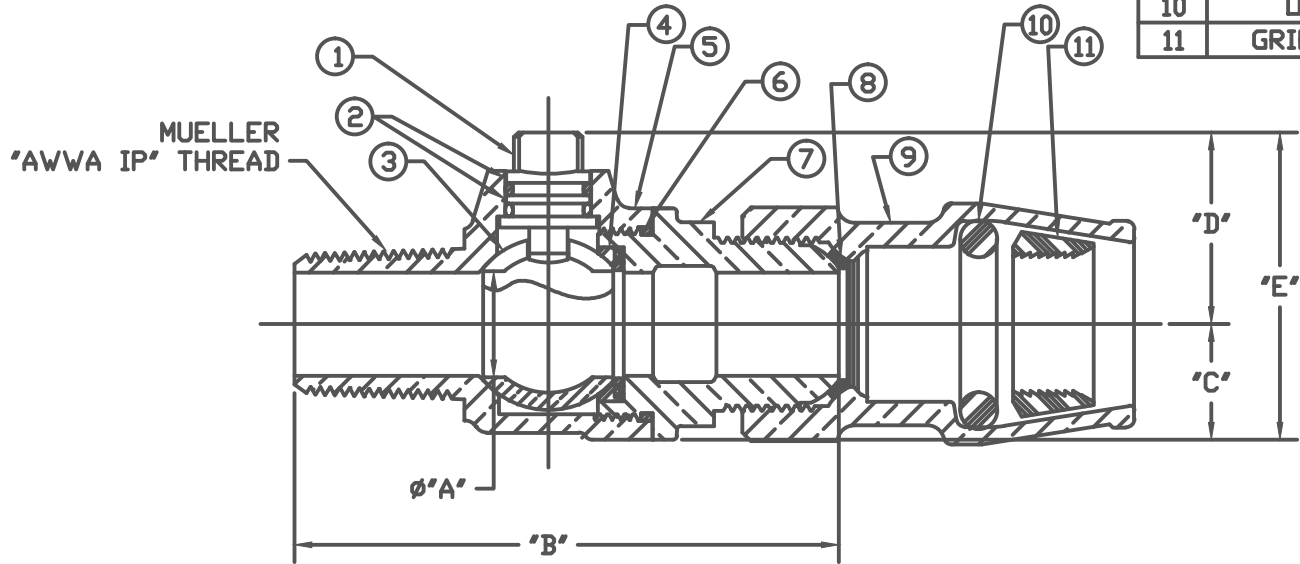

SIZE	ØA	B	C	D	E
3/4	.75	3.95	.84	1.36	2.20
1	1.00	4.87	1.15	1.56	2.71

NOTE: ALL WETTED PARTS ARE LOW LEAD BRASS ALLOY

FILEPATH: PROD-ENG\MUELLER\ASYSUBMITTALS\B25026N

				DRFTR JGarvin	9/13/11	Mueller Co.		UNLESS OTHERWISE NOTED SURFACE PREPARATION: BREAK CORNER(S) ----- .000 SURFACE FINISH -- XX RMS TOLERANCE(S): LINEAR ----- ± .000 ANGULAR ----- ± 0°00'		THIRD ANGLE PROJECTION  REF. No. SCALE NONE	
				CHKR							
				ENGR							
				MGR							
				BY	DATE	STK No					
				MAT'L		DESCR.		BALL CORPORATION VALVE		PART NUMBER	
						LOW LEAD BRASS('AWWA IP' x IPS PE)				B25026N	
REV	ECR	DESCRIPTION	DATE	BY	CHKR	PER EST NO: DXXXX		EST FIN WT = 0.0000 lbs			

PART NUMBER
B25026N
4²-MRKTG