


No.	DESCRIPTION	MATERIAL DESCRIPTION
1	BODY	CAST LOW LEAD BRASS ALLOY
2	CAP	CAST BRASS ASTM B62 ALLOY C83600
3	STEM	LOW LEAD BRASS ALLOY
4	BALL	LOW LEAD BRASS ALLOY
5	GASKET	ASTM D2000 (NITRILE)
6	SOLID PIN	AISI 303 STAINLESS STEEL
7	O-RING	ASTM D2000 (EP)
8	END PIECE	CAST LOW LEAD BRASS ALLOY
9	O-RING	ASTM D2000 (EP)
10	CTS GASKET SUB	ASTM D2000(SBR)&410 STAINLESS STEEL
11	CONNX NUT	CAST BRASS ASTM B62 ALLOY C83600

SIZE	ØA	B	C	D	E
3/4"R	.63	3.44	.75	2.12	2.87
3/4"	.75	3.59	.84	2.12	2.96
1"R	.75	4.00	.84	2.12	2.96
1"	1.00	5.03	1.15	2.32	3.47
1x3/4"	.75	3.78	.84	2.32	3.16
1 1/2"	1.50	5.06	1.50	3.37	4.87
1 1/2x2"	1.50	5.04	1.50	3.37	4.87
2"	2.00	5.52	1.82	3.92	5.74

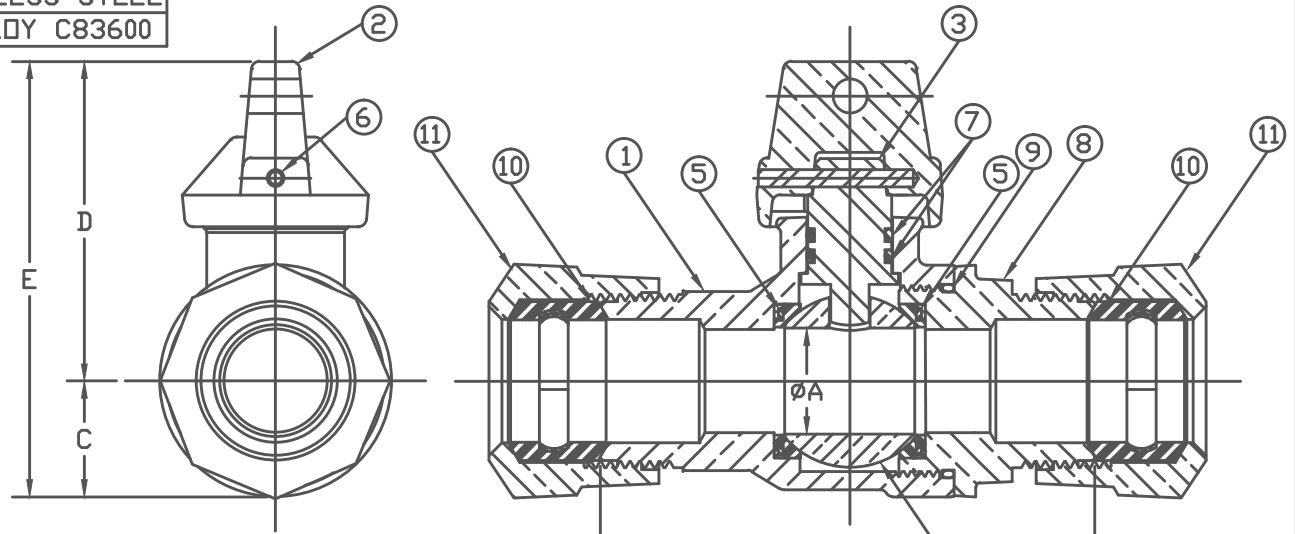

NOTE: ALL WETTED PARTS ARE LOW LEAD BRASS ALLOY

FILEPATH: PROD-ENG/MUELLER/ASYSUBMITTALS/B25209N

PART NUMBER  
B25209N  
442-MRKTG

DRFTR	JGarvin	8/2/11	<b>Mueller Co.</b>	
CHKR				
ENGR				
MGR				
UNLESS OTHERWISE NOTED			THIRD ANGLE PROJECTION	
SURFACE PREPARATION:			REF. No. SCALE	
BREAK CORNER(S) ---- .000			FULL	
SURFACE FINISH --XXX RMS				
TOLERANCE(S):				
LINEAR ----- ± .000				
ANGULAR ----- ± 0°00'				
BY DATE				
STK No:				
MAT'L:				
DESCR.			PART NUMBER	
PER EST NO: X-XXXX EST FIN WT = 0.0000 lbs			B25209N	
DESCR.			INLINE BALL CURB VALVE LOW LEAD BRASS (110CTS x 110CTS)	