


## FIRE PROTECTION PRODUCTS

### A-373 UL LISTED/FM APPROVED

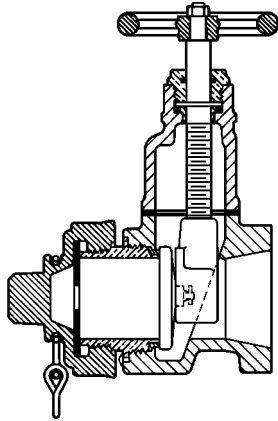


**Iron Body:** Bronze Mounted Type with Nozzle Cap and Chain

**A-373:** Inlet 2-1/2", flanged for bolting to fire hydrant (UL listed and FM approved)


175 psi (1200 kPa/12 barg) Working Pressure  
350 psi (2400 kPa/24 barg) Test Pressure

Order by Quantity, Catalog Number, Color, Outlet Threading, Size and Shape of Nut on Hose Nozzle Cap.


These hose gate valves are available for both Super Centurion® and Modern Centurion® fire hydrants. When ordering the A-373 valve, the following items are also necessary.

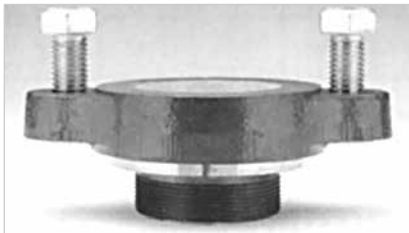

**Catalog Number 143528**  
Hose Gate Flange Adaptor

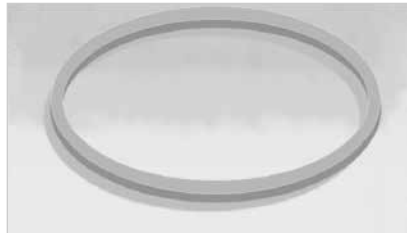


**Catalog Number 193631**  
Hose Gate Gasket

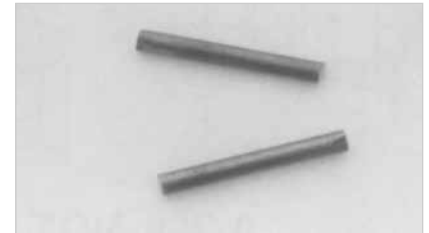

**Catalog Number 170776**  
Brass Pins

**Catalog Number 192606**  
Bolts (2 required)

### A-369 NOT UL LISTED OR FM APPROVED

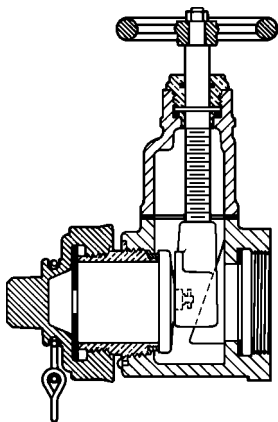

**Iron Body:** Bronze Mounted Type with Nozzle Cap and Chain

**A-369:** Inlet 2" inside hose thread or inside I.P. thread (not UL listed or FM approved).

175 psi (1200 kPa/12 barg) Working Pressure  
350 psi (2400 kPa/24 barg) Test Pressure

Order by Quantity, Catalog Number, Color, Outlet Threading, Inlet Threading, Size and Shape of Nut on Hose Nozzle Cap.