


H-603 electric power operator


- Catalog number H-603**
- Ground fault interrupter included
- Mounts directly to B-100/B-101, A-3 and E-5/D-5 machines without special adapters
- Can be set to automatically advance boring yoke assembly bar while drilling
- Reversible 35 RPM maximum free speed
- Reversible 3/4 horsepower electric motor
- Ground fault interrupter complies with NEC article 305-6(a) and OSHA article 1926.404bii
- Circuit breaker with manual reset
- Power supply required: 1200 watts minimum at 110 - 120 volts A.C. or D.C., 10 amps minimum capacity
- Total shipping weight 41 lbs. (19 kg)
- Machine only weight 35 lbs. (16 kg)
- Shipped in a sturdy wooden storage chest #311793
- Operating instructions form #11758

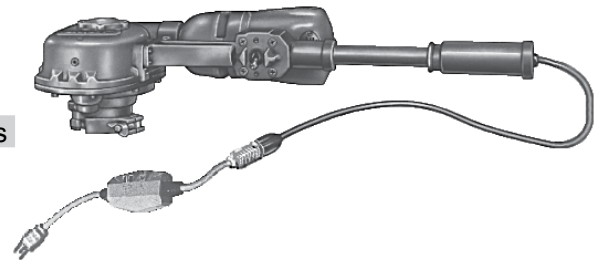

H-603 electric power operator

H-604 air power operator

- Catalog number H-604**
- Mounts directly to B-100/B-101, A-3 and E-5/D-5 machines without special adapters
- Can be set to automatically advance boring bar yoke assembly while drilling
- Reversible air motor-can withdraw tool under power
- Constant feed lubricator (shipped loose)
- 35 RPM maximum free speed
- Air supply: 55 cubic feet of free air per minute at 90 psig
- Total shipping weight 42 lbs. (19 kg)
- Machine only weight 37 lbs. (17 kg)
- Shipped in a sturdy wooden storage chest #311794
- Operating instructions form #11758

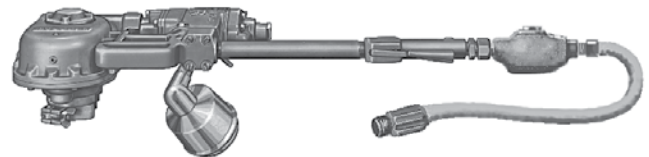

H-604 air power operator

IMPORTANT: MAINTAIN PRESSURE OF 90 PSIG - THE USE OF A GAGE AT THE THROTTLE TO DETERMINE THE ACTUAL PRESSURE OF AIR AT THE POWER OPERATOR IS RECOMMENDED. PROPER USE OF OILER IS REQUIRED TO MAINTAIN OPERATOR WARRANTY.

H-704 hydraulic power operator

- Catalog number H-704**
- Reversible operation.
- Use with Mueller® D-5, E-5 Drilling Machines, and Mueller® B-101 and A-3 Drilling and Tapping Machines.
- Removable handle for efficient storage in its sturdy container.
- Preset safety relief valve prevents over torque conditions.

