


MUELLER[®] Grip Compression Connection

The MUELLER[®] Grip Compression Connection is a stab connection with large wrench flats. It is available in CTS and IPS. Products can be ordered by adding a "G" in front of an existing compression connection Part Number (EX: B25008N to G25008N).

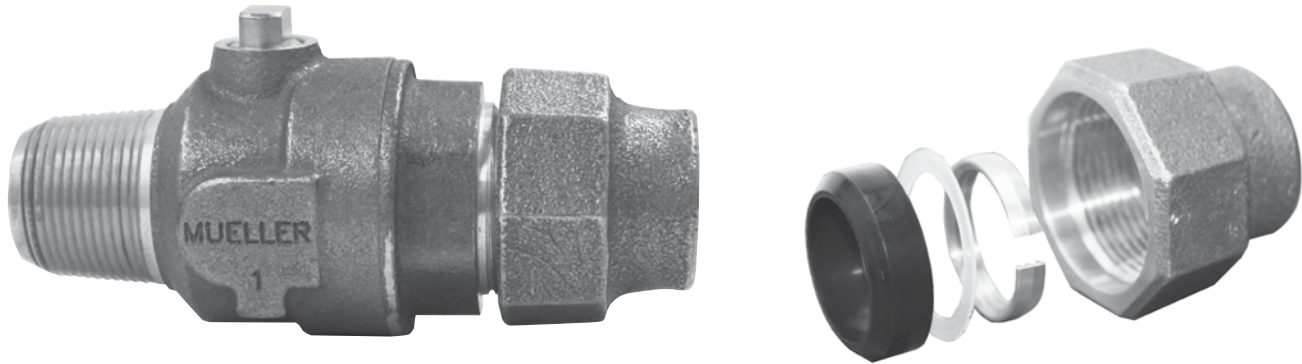

- **PRESSURE RATING** -The pressure holding capability of the MUELLER Grip Compression Connection is designed to be greater than that of the valve or fitting on which it is used (only in potable water distribution applications complying with AWWA standards).
- **GASKET** - compressed against the fitting and pipe outer surface by tightening of nut.
- **MUELLER GRIP COMPRESSION CONNECTION** - available for type "K" copper and PE tubing (CTS) and IPS PE pipe.
- **INTERCHANGEABLE** - with 110[®] CTS Compression Connection in 3/4" - 1" or CTS Pack Joint in 3/4" - 2".
IPS with 3/4" and 1" PEP Pack Joint.
- **NUT** - corrosion resistant cast bronze.

Grip Joint kits

Size	Kit	Grip ring	Washer	Gasket	Connection nut
3/4" CTS	682861	312919	311692	537881	537838
1" CTS	682862	312920	311695	537882	537839
1-1/2" CTS	682863	312921	538107	537883	537840
2" CTS	682864	312922	538108	538109	537841
3/4" IPS	683023	313094	313695	311869	538320
1" IPS	683024	313095	312122	313098	538321

