


# 8A.40



## METER SETTERS WITH VERTICAL INLET & HORIZONTAL OUTLET (FOR 1-1/2" & 2" FLANGED METERS)

Rev. 4-14 Shaded area indicates change


8A - COPPER YOKES

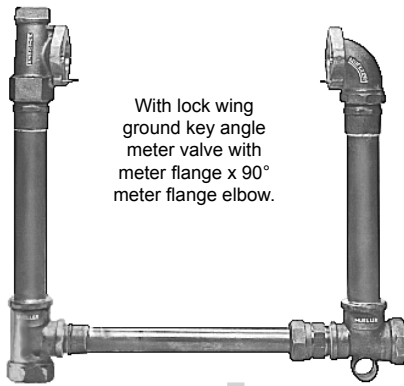

With lock wing ground key angle meter valve with meter flange x 90° meter flange elbow.

**H-1428N**

FIP end inlets and outlets

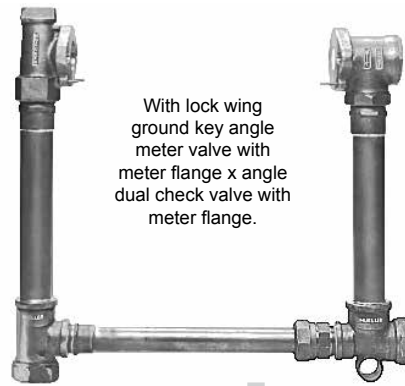

With lock wing ground key angle meter valve with meter flange x angle dual check valve with meter flange.

**H-1428-2N**

FIP end inlets and outlets



With lock wing ground key angle meter valve with meter flange x lock wing ground key angle meter valve with meter flange.


**H-1428-00N**

FIP end inlets and outlets

### 1-1/2" and 2" Copper meter setters

Catalog number	H-1428N	H-1428-2*	H-1428-00
Description	With lock wing ground key angle meter valve with meter flange x 90° meter flange elbow.	With lock wing ground key angle meter valve with meter flange x angle dual check valve with meter flange.	With lock wing ground key angle meter valve with meter flange x lock wing ground key angle meter valve with meter flange.

\*For ASSE Approved canister dual check - add 6A for regular or 6D for drain

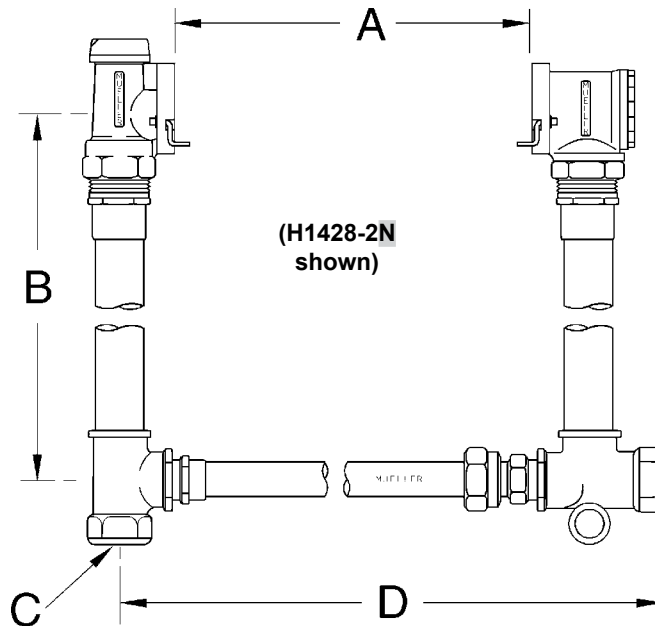

### Dimensions

Meter Sizes	1-1/2"	2"
A	13.25"	17.25"
B - riser height	12", 15", 18", 21", 24", and 27"	12", 15", 18", 21", 24", and 27"
C - nominal pipe size of inlet and outlet	1-1/2"	2"
D	19.187"	24.125"

Contact MUELLER® Customer Service Center for ordering requirements and availability.

See section 6 for end connections that can be used with these yokes.

## SPECIFY METER SIZE, RISER HEIGHT AND CATALOG NUMBER.

MUELLER Copper Meter Yokes are manufactured and tested in accordance with ANSI/AWWA C800. Components in contact with potable water will also comply with latest requirements of the Federal Safe Drinking Water Act.