


Rev. 4-14 Shaded area indicates changes

- **Catalog numbers -**
 - A-466** 4-1/2"* main valve opening 3-way (2 hose nozzles and 1 pumper nozzle)
fits 4" regular R.D.Wood shoe
 - A-467** 5-1/4" main valve opening 3-way (2 hose nozzles and 1 pumper nozzle)
fits 6" regular R.D.Wood shoe
 - A-468** 5-1/4" main valve opening 3-way (2 hose nozzles and 1 pumper nozzle)
fits 5" bronze lined R.D.Wood shoe
- Meets all applicable parts of ANSI/AWWA C502 Standard
- Post type dry barrel design
- Dry top design with O-ring sealed oil reservoir
- Traffic feature with stainless steel safety stem coupling
- Compression type patented main valve closes with pressure for positive seal; it is made of rubber and is conveniently reversible providing a spare for long service life
- Operating nut available in wide variety of shapes and sizes
- Field replaceable hose and pumper nozzles
- Hose and pumper nozzles have large radius, full flow openings for low friction loss
- Dual bronze drain valves provide effective barrel drainage
- 200 psig (1400 kPa/14 barg) maximum working pressure, 400 psig (2800 kPa/28 barg) test pressure

*4-1/2" M.V.O. hydrants have 5-1/4" bonnets, upper barrels, safety flanges and lower barrels and are marked 5-1/4" even though the main valve opening is 4-1/2".

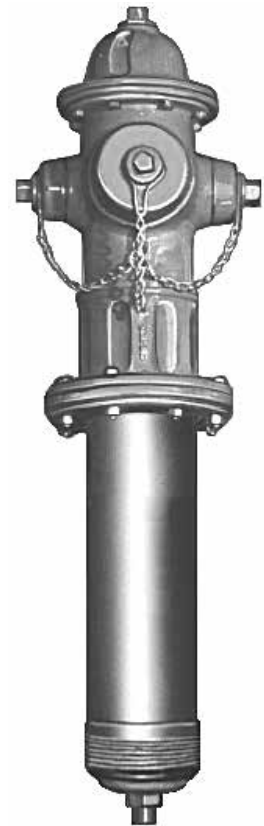

Dimensions

