


Rev. 4-14 Shaded area indicates changes

- **Super Centurion 250™ catalog numbers**
  - A421 4-1/2"** main valve opening 3-way (2 hose nozzle / 1 pumper nozzle)
  - A423 5-1/4"** main valve opening 3-way (2 hose nozzle / 1 pumper nozzle)
  - A454 4-1/2"** main valve opening 3-way (3 hose nozzle) \*
  - A455 5-1/4"** main valve opening 4-way (4 hose nozzle) \*
  - A458 4-1/2"** main valve opening 4-way (3 hose nozzle / 1 pumper nozzle) \*
  - A459 5-1/4"** main valve opening 4-way (2 hose nozzle / 1 pumper nozzle)\*\*
- \* Hose Gate Valves required on FM Approved Models
- \*\* A459 is UL Listed and ANSI/AWWA C502
- **Super Centurion 200™ catalog numbers**
  - A-433 4-1/2"** main valve opening 2-way (2 hose nozzle)
  - A-435 5-1/4"** main valve opening 2-way (2 hose nozzle)
- 10 year limited warranty on material and workmanship
- Meets all applicable parts of ANSI/AWWA C502 Standard
- Post type dry barrel design
- Dry top design with O-ring sealed oil reservoir
- Traffic feature with stainless steel safety stem coupling
- Compression-type main valve closes with pressure for positive seal; it is made of rubber and is conveniently reversible providing a spare for long service life
- Operating nut available in wide variety of shapes and sizes – open left or right
- Field replaceable hose and pumper nozzles
- Hose and pumper nozzles have large radius, full flow openings for low friction loss
- Contoured shoe is designed for full flow
- Dual bronze drain valves provide effective barrel drainage
- 250 psig (1725 kPa/17 barg) maximum working pressure, 500 psig (3450 kPa/35 barg) static test pressure for 3-way hydrants
- 200 psig (1400 kPa/14 barg) maximum working pressure, 400 psig (2800 kPa/28 barg) static test pressure for 2-way and 1-way hydrants



### Dimensions

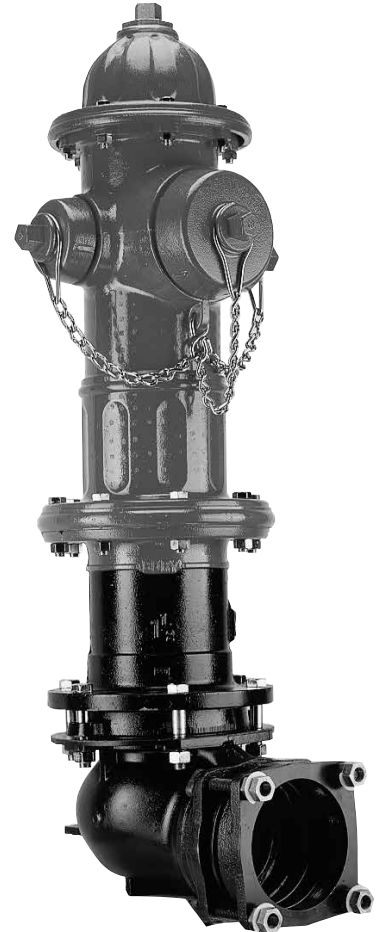