


No.	DESCRIPTION	MATERIAL DESCRIPTION
1	BODY	CAST LOW LEAD BRASS ALLOY
2	O-RING	EP ASTM D2000
3	KEY	CAST LOW LEAD BRASS ALLOY
4	SPRING WASHER	ASTM A103 ALLOY C51000 PHOS BRONZE
5	CAP	CAST BRASS ASTM B62 ALLOY C83600
6	GROOVE PIN	ASTM B124 ALLOY 655 SILICON BRONZE
7	PJ GASKET	BUNA-N ASTM D2000
8	PJ WASHER	POLYPROPYLENE
9	CLPG NUT SUB	CAST BRASS ASTM B62 ALLOY C83600

TITLE TO AND OWNERSHIP OF THIS ENGINEERING DATA REMAINS IN Mueller Co. NO USE IS TO BE MADE OF THIS DATA EXCEPT AS SPECIFICALLY AUTHORIZED BY Mueller Co. ASSENT ON THE PART OF THE RECIPIENT TO THESE CONDITIONS IS PRESUMED

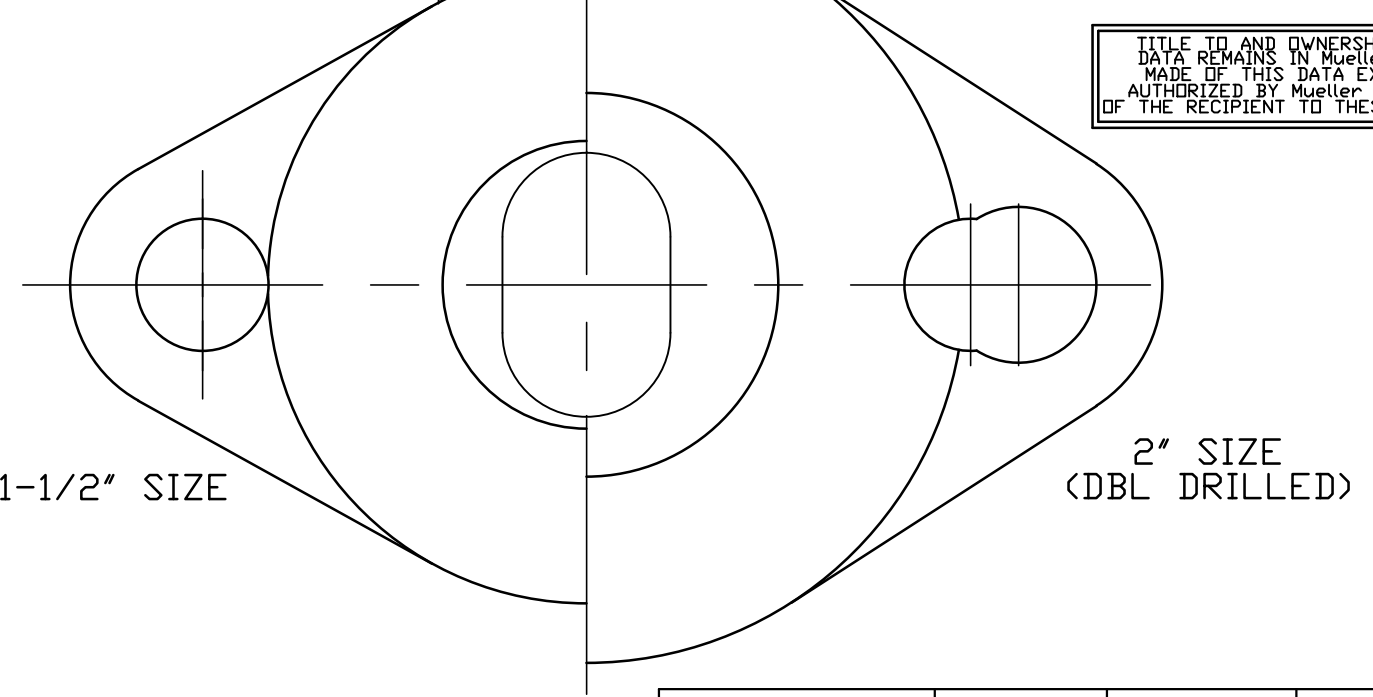

VALVE SIZE	A	B	C	D
1-1/2	1.812"	3.219"	2.786	6.005
2	2.188"	3.199"	3.071	6.270

NOTE: ALL WETTED PARTS ARE LOW LEAD BRASS ALLOY

FILEPATH: PROD-ENG\MUELLER\ASYSUBMITTALS\P14277N

DRFTR	jGarvin	10/11/10			
CHKR					
ENGR					
MGR					
UNLESS OTHERWISE NOTED			THIRD ANGLE PROJECTION		
SURFACE PREPARATION:					
BREAK CORNER(S) ---- .000					
SURFACE FINISH -- XX RMS			REF. No.	SCALE	
TOLERANCE(S):					
LINEAR ----- ± .000					
ANGULAR ----- ± 0°00'					
BY DATE					
STK No:					
MAT'L:					
DESCR.			DWG NUMBER		
ANGLE METER LLB STOP VALVE			P14277N		
(PJ CTS x MTR FLANGE)					
REV	ECR	DESCRIPTION	DATE	BY	CHKR
PER EST NO: DXXXX EST FIN WT = 0.0000 lbs					

DWG NUMBER  
P14277N  
442-MRKTNG