

POWER OPERATORS (AIR & HYDRAULIC) FOR CL-12™ AND C1-36-99002 DRILLING MACHINES

Mueller Co.

3.23

Rev. 1-09

H-614 AIR POWER OPERATOR

- ❑ Catalog number H-614
- ❑ Attaches directly to CL-12 machine
- ❑ Attaches to C1-36-99002 machine using optional adapter 580815
- ❑ Non-reversible air motor
- ❑ 82 RPM maximum free speed; 51 RPM minimum speed under full load
- ❑ Air supply: 90 cubic feet of free air per minute at 90 psig (full load)
- ❑ Total shipping weight 65 lbs. (26 kg)
- ❑ Machine only weight 28 lbs. (13 kg)
- ❑ Shipped in a wooden storage chest

IMPORTANT: MAINTAIN PRESSURE OF 90 PSIG—THE USE OF A GAGE AT THE THROTTLE TO DETERMINE THE ACTUAL PRESSURE OF AIR AT THE POWER OPERATOR IS RECOMMENDED.


Note: The H-600 and H-601 air power operators are no longer available but may still be repairable; contact your local Mueller representative for details on our repair program.



**Optional adapter
580815**

H-607 HYDRAULIC POWER OPERATOR

- ❑ Catalog number H-607
- ❑ Attaches directly to CL-12 machine
- ❑ Attaches to C1-36-99002 machine using optional adapter 580815
- ❑ 61 RPM at 8 GPM
- ❑ Flow range: 7 - 9 GPM / 26-34 lpm
- ❑ 1500 psig/105 bar maximum working pressure at up to 397 ft/lbs of torque
- ❑ Open center system type
- ❑ Operator only weight 31 lbs. (14 kg)
- ❑ Flush-faced hydraulic fittings keep lines contamination-free
- ❑ 15" (approximate) non-conductive hoses
- ❑ Integral carrying handle
- ❑ Shipped in a wooden storage chest

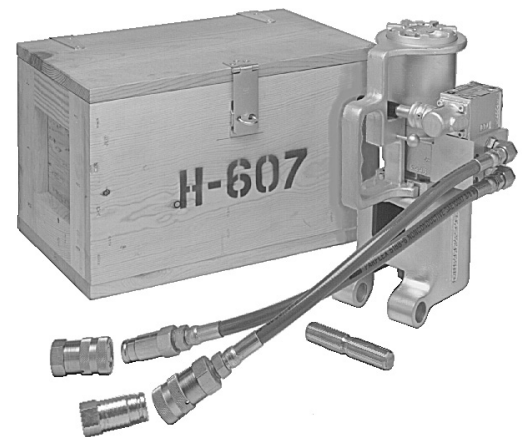

H-607 hydraulic power operator



**Optional adapter
580815**

Note: The redesigned H-607 replaces the old H-607 and H-608 models.