



COPPER METER YOKES WITH VERTICAL INLET AND OUTLET

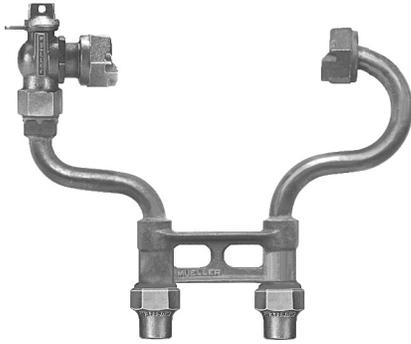

MUELLER® integral copper flare vertical connection ends (B-2489 shown)



Typical installation of a vertical inlet and outlet copper meter yoke

Copper meter yokes with vertical inlet and outlet, and Mueller integral copper flare connection

Check valve options

Catalog number	H-1487	H-1488	H-1489	H-1490	B-2489	B-2490
Description	Plain yoke	With test valve	With lock wing ground key angle meter stop	With lock wing ground key angle meter stop and test valve	With lock wing MUELLER 300™ Angle Ball Valve*	With lock wing MUELLER 300 Angle Ball Valve* and test valve



Angle dual check valve

* Add "R" to the end of the yoke catalog number to order

MUELLER Copper Meter Yokes can be ordered with one of the following: an ASSE approved top entry vertical check valve; an ASSE approved dual check valve; a dual check valve (ASSE non-approved). To order the ASSE approved top entry check feature, add a suffix of **-6A** to the yoke catalog number; add **-6D** for the same check with a test drain. For the dual check feature, add a suffix of **-2A** to the yoke catalog number for the ASSE approved model or **-2** suffix for the nonapproved model. Examples:


B-2489-6D for the ASSE approved top entry vertical check with a test drain;
B-2489-2A for the ASSE approved model angle dual check valve.

M-98™ ASSE approved top entry vertical check valve



a reduced port Angle Ball Valve; EXAMPLE:

Dimensions



Meter size	5/8"*	5/8" x 3/4" *	3/4" *	1"*
Nominal size of I.P. thread in meter nut	3/4"	1"	1"	1-1/4"
Dimension A	1-1/16"	1-5/16"	1-5/16"	1-5/8"
Dimension B	7-7/8"	7-7/8"	9-3/8"	11-1/8"
Dimension C - nominal pipe size of inlet and outlet	3/4"	3/4"	3/4"	1"
Dimension D	4"	4"	5"	6"
Dimension E	12-5/8"	12-5/8"	14-1/4"	17-1/4"
Dimension F	6-7/8" (9"**)	6-7/8" (9" **)	8-1/4" (10" **)	10-3/16" (12" **)

5/8x3/4x7 B-2489R.

** With 6A or 6D option.

Note: the 5/8", 5/8" x 3/4" and 3/4" sizes are furnished with a tie bar on heights greater than 15". The 1" size is furnished with a tie bar on heights greater than 18".

SPECIFY METER SIZE, RISER HEIGHT AND CATALOG NUMBER