



Rev. 9-09

MUELLER SUPER CENTURION 200™ 2-Way and 1-Way Fire Hydrant

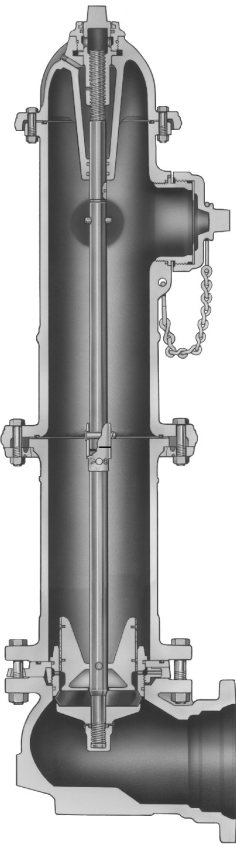


- ❑ Meets all applicable parts of ANSI/AWWA C502 Standard
- ❑ Hold-down nut with integral weather seal; designed to discourage unauthorized tampering
- ❑ Gasket seals at bonnet, ground and shoe flanges
- ❑ Dry top design with O-ring sealed oil reservoir
- ❑ Stainless steel safety stem coupling pulls free if hydrant is hit by a vehicle preventing damage to the stem and main valve
- ❑ Reversible, compression-type main valve closes with pressure for positive seal
- ❑ Low flow loss design with full flow nozzles and shoe
- ❑ Field replaceable nozzles
- ❑ Dual bronze drain ways
- ❑ 200 psig (1379 kPa) maximum working pressure, 400 psig (2758 kPa) test pressure

MUELLER MODERN CENTURION™ Fire Hydrant

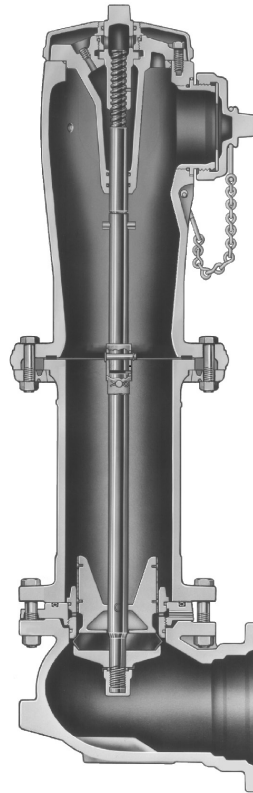


- ❑ Modern, sleek exterior design
- ❑ Meets all applicable parts of ANSI/AWWA C502 Standard
- ❑ Post type dry barrel design
- ❑ Dry top design with O-ring sealed oil reservoir
- ❑ Traffic feature
- ❑ Stainless steel safety stem coupling pulls free if hydrant is hit by a vehicle preventing damage to the stem and main valve
- ❑ Reversible, compression-type main valve closes with pressure for positive seal
- ❑ Low flow loss design with full flow nozzles and shoe
- ❑ Field replaceable nozzles
- ❑ Dual bronze drain ways
- ❑ Two way and three way designs
- ❑ 200 psig (1379 kPa) maximum working pressure, 400 psig (2758 kPa) test pressure

MUELLER CENTURION Spin-In Fire Hydrant

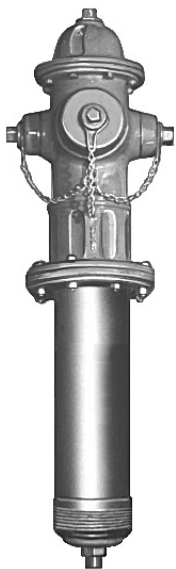

- ❑ Lower barrel threaded to fit most sizes of R.D.Wood fire hydrant shoes
- ❑ Meets all applicable parts of ANSI/AWWA C502 Standard
- ❑ Post type dry barrel design
- ❑ Dry top design with O-ring sealed oil reservoir
- ❑ Traffic feature
- ❑ Reversible, compression-type main valve closes with pressure for positive seal
- ❑ Low flow loss design with full flow nozzles and shoe
- ❑ Field replaceable nozzles
- ❑ Dual bronze drain ways
- ❑ Two way and three way design
- ❑ 200 psig (1379 kPa) maximum working pressure, 400 psig (2758 kPa) test pressure

MUELLER 2-1/8" Post and Flush Type Fire Hydrants

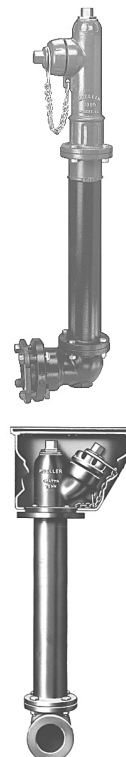

- ❑ 2-1/8" main valve opening
- ❑ Meets all applicable parts of ANSI/AWWA C502 Standard
- ❑ Dry barrel design
- ❑ Used for blow offs, sampling, irrigation, golf course watering, private estates, etc.
- ❑ Compression type main valve closes with pressure
- ❑ Bronze drain
- ❑ Flush type has a cast iron box with lid
- ❑ 150 psig (1034 kPa) maximum working pressure 300 psig (2068 kPa) test pressure