


Multi-purpose thread ends (B-2706 shown)



Typical installation of an adjustable type copper meter yoke with horizontal inlet and outlet and multi-purpose thread ends

### Adjustable type copper meter yokes with horizontal inlet and outlet, and multi-purpose thread ends

Catalog number	H-1706	B-2706
Description	With lock wing ground key angle meter stop	With lock wing MUELLER 300™ Angle Meter Ball Valve*

NOTE: An optional clamp with a bracing eye is available on special order for these yokes. A length of 3/4" CTS O.D. plastic tubing or 1/2" schedule 40 steel pipe can be inserted through the eye to provide additional stability when using the yoke with plastic service tubing or pipe. Contact the MUELLER Customer Service Center for ordering instructions, availability, and price.

#### Check valve options

MUELLER Copper Meter Yokes can be ordered with one of the following: an ASSE approved top entry vertical check valve; an ASSE approved dual check valve; a dual check valve (ASSE non-approved). To order the ASSE approved top entry check feature, add a suffix of **-6A** to the yoke catalogue number; add **-6D** for the same check with a test drain. For the dual check feature, add a suffix of **-2A** to the yoke catalogue number for the ASSE approved model or **-2** suffix for the nonapproved model. Examples:

**B-2706-6D** for the ASSE approved top entry vertical check with a test drain;  
**B-2706-2A** for the ASSE approved model angle dual check valve.




M-98™ ASSE approved top entry vertical check valve



Angle dual check valve

#### Dimensions

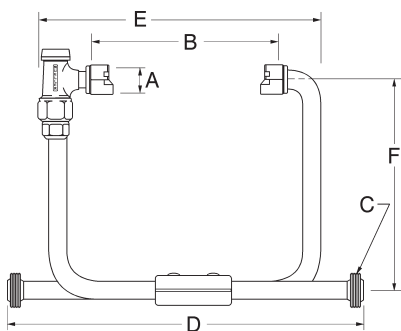

Meter size	5/8" x 3/4" to 3/4"
Nominal size of I.P. thread in meter nut	1"
Dimension A	1-5/16"
Dimension B	Adjustable for 5/8"x3/4" and 3/4" meters
Dimension C - nominal pipe size of inlet and outlet	1"
Dimension D	Adjustable
Dimension E	Adjustable
Dimension F - minimum riser height	7" (9" **)
Other riser heights available	9", 10"

\* Add "R" to the end of the yoke catalogue number to order a reduced port Angle Ball Valve;

EXAMPLE: 5/8x3/4x7 B-2706R.

\*\*Minimum with 6A or 6D option.

Copper Meter Yokes are normally supplied less end connections. See pages 8A.48 and 8A.49 for end connections that can be used with these yokes.

**SPECIFY METER SIZE, RISER HEIGHT AND CATALOG NUMBER.**