


Rev. 8-04

- ❑ Catalog numbers--
 - A-465** 4-1/2"* main valve opening three way (two hose nozzles and one pumper nozzle) fits 4-1/2" bronze lined R.D.Wood shoe
 - A-466** 4-1/2"* main valve opening three way (two hose nozzles and one pumper nozzle) fits 4" regular R.D.Wood shoe
 - A-467** 5-1/4" main valve opening three way (two hose nozzles and one pumper nozzle) fits 6" regular R.D.Wood shoe
 - A-468** 5-1/4" main valve opening three way (two hose nozzles and one pumper nozzle) fits 5" bronze lined R.D.Wood shoe
- ❑ Meets all applicable parts of ANSI/AWWA C502 Standard
- ❑ Post type dry barrel design
- ❑ Dry top design with O-ring sealed oil reservoir
- ❑ Traffic feature with stainless steel safety stem coupling
- ❑ Compression type patented main valve closes with pressure for positive seal; it is made of rubber and is conveniently reversible providing a spare for long service life
- ❑ Operating nut available in wide variety of shapes and sizes
- ❑ Field replaceable hose and pumper nozzles
- ❑ Hose and pumper nozzles have large radius, full flow openings for low friction loss
- ❑ Dual bronze drain valves provide effective barrel drainage
- ❑ 200 psig (1379 kPa) maximum working pressure, 400 psig (2758 kPa) test pressure

*4-1/2" M.V.O. hydrants have 5-1/4" bonnets, upper barrels, safety flanges and lower barrels and are marked 5-1/4" even though the main valve opening is 4-1/2".

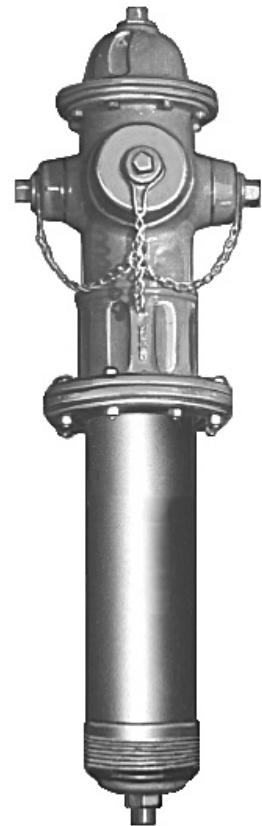

Dimensions

