


Rev. 8-04

- ❑ Catalog Numbers ---
A-415 5-1/4" main valve opening three way
 (two hose nozzles and one pumper nozzle)
- ❑ Meets all applicable parts of ANSI/AWWA C502 Standard
- ❑ Flush type dry barrel design
- ❑ Dry top design with O-ring sealed oil reservoir
- ❑ Cast iron flush box with non-locking lid
- ❑ Compression type patented main valve closes with pressure for positive seal; it is made of rubber and is conveniently reversible providing a spare for long service life
- ❑ Operating nut available in wide variety of shapes and sizes
- ❑ Hose and pumper nozzles have large radius, full flow openings for low friction loss
- ❑ Contoured shoe is designed for full flow
- ❑ Dual bronze drain valves provide effective barrel drainage
- ❑ 150 psig (1034kPa) maximum working pressure, 300 psig (2068 kPa) test pressure



Dimensions

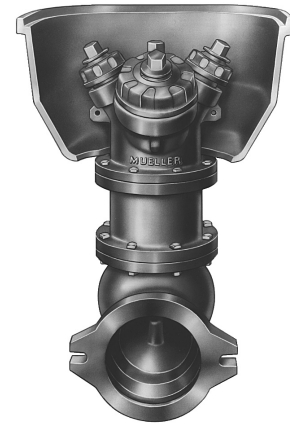