


Rev. 8-04

- ❑ Catalog numbers---
A-412 2-1/8" main valve opening one way
(one 2-1/2" hose nozzle) non-locking lid
- ❑ Meets all applicable parts of ANSI/AWWA C502 Standard
- ❑ Flush type dry barrel design
- ❑ Compression type main valve closes with pressure
- ❑ Cast iron flush box with non-locking lid
- ❑ Operating nut available in wide variety of shapes and sizes
- ❑ Field replaceable hose nozzles
- ❑ Hose nozzles have large radius, full flow openings for low friction loss
- ❑ Contoured shoe is designed for full flow
- ❑ Dual bronze drain valves provide effective barrel drainage
- ❑ 150 psig (1034 kPa) maximum working pressure,
300 psig (2068 kPa) test pressure



Dimensions

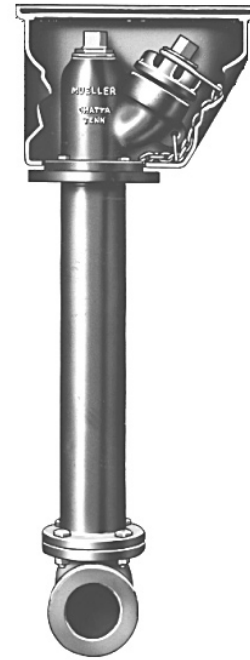