



Automatic Control Valves

Protecting people and property from the ravages of fire

Mueller Co.

Reliable Connections[®]

Contents

02

The Mueller® Advantage

03-05

Pressure Relief Valves

06-07

Pressure Reducing Valve

08

Modulating Float Valve

09-10

Non-Modulating Float Valve

11

One-Way Flow Altitude Valve

12

One-Way Flow Altitude Valve with
Differential Control

13-14

Full Port, Single Chamber,
Hydraulically Operated Valve

15-16

Specifications

17

Main Valve Grooved Ends

18

Electronically Operated Deluge Valve

19

Pneumatically Operated Remote
Control Deluge Valve

20

Electric/Pneumatically Operated Deluge Valve

21-23

Dimensions

24-25

UL/FM Relief & ULC Reducing Only

26

Dimensions Main Valve Grooved Ends

27-30

Dimensions Deluge Valves

Company Overview

Mueller Co. is a leader in high-quality commercial and institutional fire protection products, offering a broad range of carefully designed, durable, reliable and easily maintained fire protection products compliant to UL/FM requirements. Plus, all Mueller Co. products are backed by the company's expert technical support, superior service, and ready parts availability. Mueller Co. UL/FM fire protection products set the standard for performance and reliability year after year.

Mueller Water Distribution Products are available through Authorized Mueller Stocking Distributors in all parts of the United States, and are sold around the world through qualified distributors and representatives.

Mueller Co.'s flow control and fire protection products are used in the building and maintenance of infrastructure. This includes Power, Institutional, Oil & Gas, Chemical and more.



Core Values

Mueller Co. has a set of Core Values to help us think, act and work together to benefit all of our stakeholders – from our employees who are our most valued assets, to our customers who expect quality products and service.

These Core Values are not an end in themselves. Rather, they form the foundation of our culture, define behaviors required of us all and guide our decision making.

As a company and as individuals, we will:

- Act with integrity – do the right thing
- Treat each other with respect
- Build relationships
- Promote a culture of innovation and continuous improvement
- Deliver exceptional results
- Foster a safe and environmentally responsible culture

The Mueller® Advantage

With the 2017 acquisition of Singer Valve, Mueller Co. designs and manufactures automatic control valves for the global water industry. Since 1957, our pilot operated diaphragm control valves have been installed on virtually every continent around the world. Whether it is water loss management in Southeast Asia, water conservation concerns in Saudi Arabia, urban distribution demands in the United States or fire valves in Indonesia or South Korea, we provide water management solutions to governments, cities, companies and contractors around the world.

Many of our innovative products are ones that have been born out of our inherent desire to solve an application challenge. Presented with a problem, our team of electronic, instrumentation and control valve specialists are relentless in their research and design until they find a solution.

1 AISI Stainless Steel Components

Our AISI 316 stainless steel spring and stem are corrosion resistant. The AISI 316 stainless steel seat ring is guaranteed for the life of the valve.

2 Removable Stem Cap

The removable, separate stem cap reduces bent stems, which reduces inspection and assembly time.

3 Stainless Steel External Fasteners

Stainless steel external fasteners prevent rust, reducing maintenance.

4 Smaller, Lighter Cover

Smaller, lighter cover improves worker safety and reduces maintenance.

5 Removable Bonnet

Bonnet removes easily thanks to locating-pin technology.

6 Anti-Vibration Fasteners

Stainless steel anti-vibration fasteners create a dependable maintenance-free seat.

7 Extra Threaded Taps

Extra threaded taps on main valve allow for easy re-orientation of pilot system.

8 Oversized Wrench Flat

Accessible oversized wrench flat means easy disassembly of inner valve.

9 Rolling Diaphragm Design*



Exclusive rolling diaphragm design offers unequalled low flow stability.

10 Fusion Epoxy Coating

Coated inside and outside for improved flow and resistance.

11 EPDM/Buna-N Elastomer Diaphragm

EPDM/Buna-N elastomer diaphragm is chlorine and chlormine resistant.

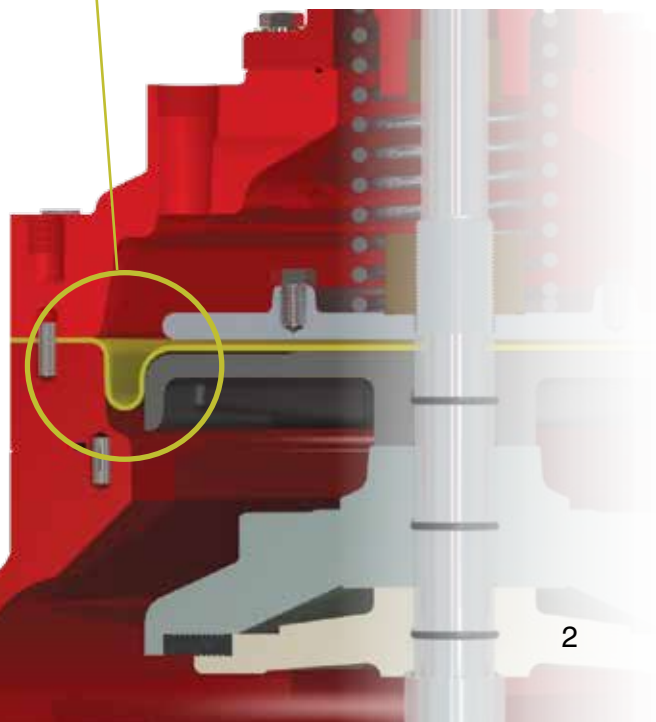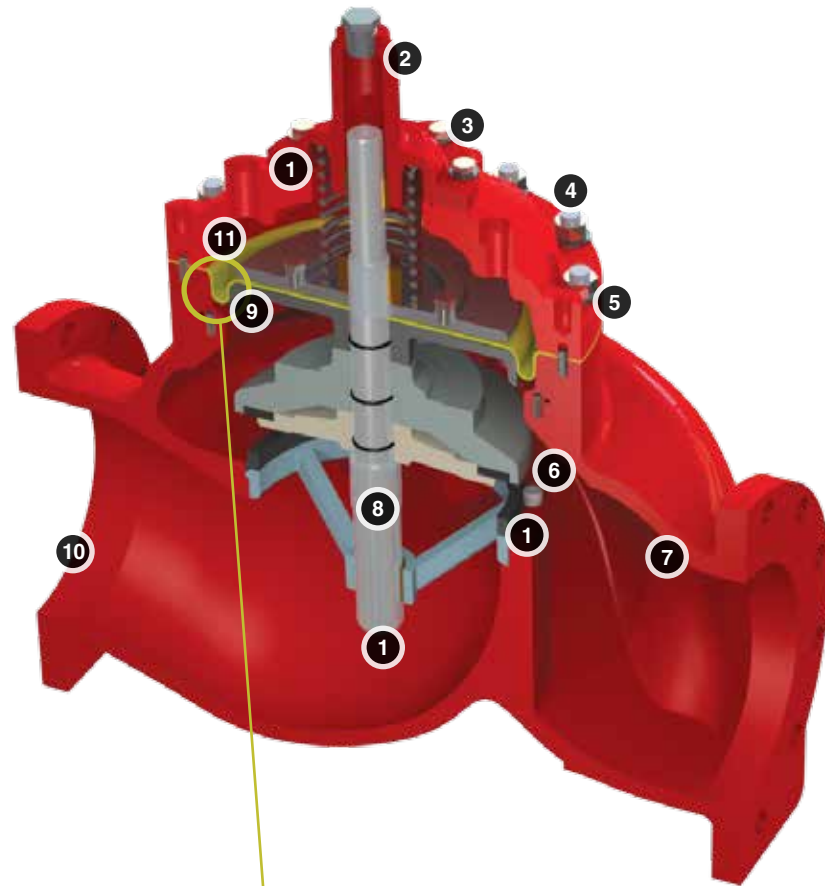

**Not available in all size/model combinations. Consult with Mueller Co.*

Model M106-RPS-8700A

UL/FM Pressure Relief Valve

The M106-RPS-8700A pressure relief valve, which is UL/FM labelled and listed, automatically relieves excess pressure in the fire protection system to discharge. The RPS series valves will also automatically modulate to relieve excess pump capacity during pump start up and shut down, allowing the pump to operate without causing surges.

These relief valves are based on the M106-PG or MA106-PG main valves and come in complete range of sizes from 2-1/2 in/65 mm to 8 in/200 mm. In typical pressure relief application, the angle style MA106-RPS-8700A is often the preferred selection.



Features

- UL Listed to ANSI/UL 1478A FM Approved to FM 1361
- Reliable diaphragm actuated
- Hydraulically operated design
- Class 150 and 300 flanges
- Stainless steel fasteners
- Heat fused red epoxy coating
- Available in globe and angle style


Schematic Drawing

1. Main Valve - M106-PG, or MA106-PG, Flanged 2-1/2 in/65 mm to 8 in/200 mm
2. Isolation Valve - lockable (optional)
3. Strainer - standard 4 in/100 mm and larger
4. Fixed Restriction- 1/8 in/3.2 mm
5. Model M852-B Closing Speed Control
6. Model M81-RP pilot - 30 to 200 psig/2.07 to 13.8 barg - optional 100 to 300 psig/6.9 to 20.7 barg

Standard materials

for pilot system components are:

- ASTM B62 bronze or ASTM B16 brass
- AISI 303/316 stainless steel trim
- Buna-N/EPDM diaphragm and seals

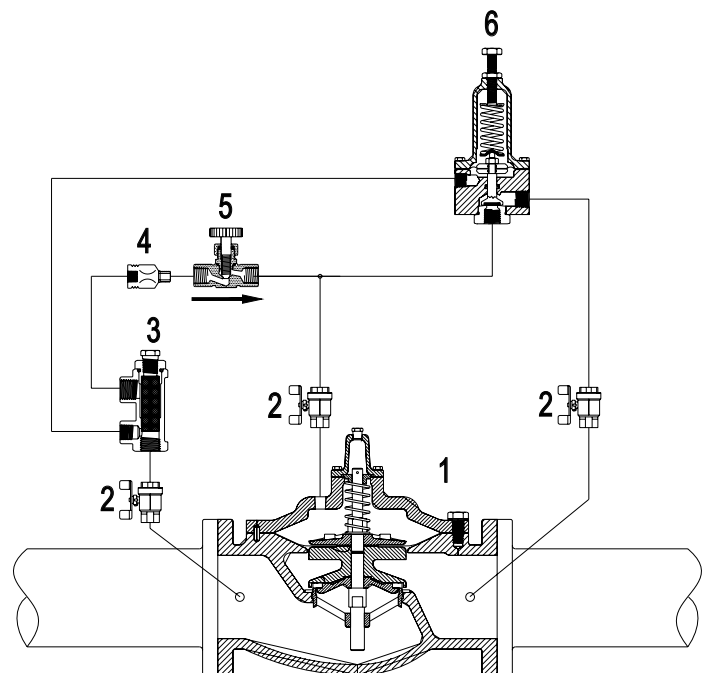

Schematic A-8700A

Model M18-FR

Pressure Relief Valve

The M18-FR is a remote sensing, high capacity, spring and diaphragm operated, normally closed valve. The inner valve is held closed by the spring. When the sensed pressure increases above the spring setting, the valve opens.

Features

- Available in globe and angle style
- Available sizes 1/2 inch and 3/4 inch
- Direct acting
- Drip tight closing
- Accurate pressure control
- UL listed to ANSI/UL 1478A FM approved to FM 1359



Specifications

- The normally closed valve shall be of stainless steel construction with a spring to adjust the opening pressure.
- The inner valve shall be of stainless steel 316 construction and the inner valve shall have EPDM resilient compound for seating.
- A separate port will sense pressure to open the valve when system pressure exceeds the valve set-point.
- Maximum working temperature: 180° F/82° C
- Maximum working pressure: 400 psig/27.6 barg


	Spring Ranges	Approximate psi per turn
Standard	20 to 200 psig (1.38 to 13.8 barg)	22 psig (1.52 barg) per turn
Optional	10 to 75 psig (0.69 to 5.17 barg)	9 psig (0.62 barg) per turn
	100 to 300 psig (6.9 to 20.7 barg)	49 psig (3.38 barg) per turn

Flow Rates		
Size	Cv	Max Flow (GPM)
1/2"	6.8	70
1/2" angle	6.9	76
3/4"	8.3	84
3/4" angle	8.4	88



Model M18-FR

Pressure Relief Valve

Schematic Drawing

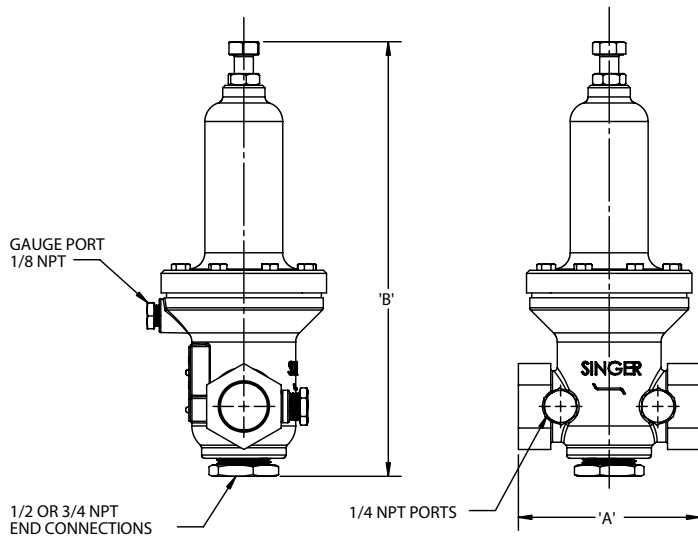

	US Units	SI Units
A	3.5 in	90 mm
B	9.06 in	230 mm
C	3.19 in	81 mm
Weight	4.05 lbs	1.8 kg

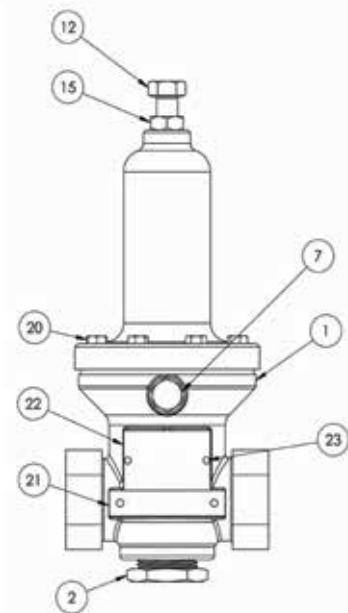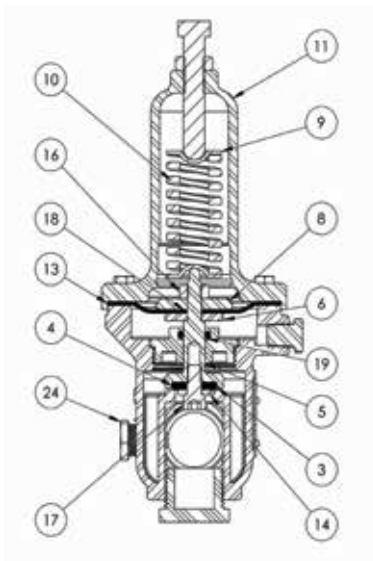

1. Body
2. Plug (stainless steel)
3. Inner valve 18FR
4. Resilient disc
5. Bushing (threaded)
6. Clamp plate (lower)
7. Plug (1/8 NPT stainless steel)
8. Clamp plate
9. Spring step
10. Spring
11. Spring casing
12. Hbolt 0.375-16x2.06 (machined)
13. Diaphragm pilot (EPDM)
14. Retainer disc
15. Nut hex jam 3/8-16 UNC
16. Nut hex 1/4-20 UNC
17. Socket head cap screw
18. O-ring
19. O-ring
20. Screw hex head
21. Tag (Mueller)
22. Tag (UL Approval)
23. Rivet U drive
24. Plug 1/4 NPT

Model M106-PR-10159 UL / M106-PR-8702A ULC

Pressure Reducing Valve

The M106-PR, which is UL and ULC labelled and listed, is ideal for automatically reducing a higher inlet pressure to a steady lower discharge pressure, regardless of fluctuations in flow or inlet pressure.

The valves are based on the M106-PG or MA106PG control valves and are available in a complete range of sizes from 2 in/50 mm to 8 in/200 mm (sizes depend on UL classification). In typical pressure reducing applications, the globe style M106-PR is often the preferred valve style.


Features

- UL and ULC listed to ANSI/UL 1468, 1739
- Reliable diaphragm actuated
- Hydraulically operated design
- Class 150, 300 flanges, grooved & threaded
- Stainless steel fasteners
- Heat fused red epoxy coating
- Available in globe and angle style



Schematic Drawing

1. Main Valve - Model M106-PG, SPG or GE, Globe or Angle, 2 in/50 mm - 8 in/200 mm UL (2 in/50 mm, 8 in/200 mm ULC) Grooved - 2 in/50 mm to 8 in/200 mm, Globe style only
2. Lockable Isolation Valve MJ0044A (optional)
3. Strainer MJ0098A - standard 4 in/100 mm & larger
4. Fixed Restriction
5. Pressure Reducing Pilot Model M161PR (UL), M160PR (ULC)
 - Range: 30 to 165 psig/2.06 to 11.37 barg (UL)
 - Range: 20 to 200 psig/1.38 to 13.8 barg (ULC)
 - Optional 100-300 psig/3.89 to 20.68 barg (ULC)
 - Note: Maximum outlet setting for both UL & ULC pilots is 165 psig/11.37 barg

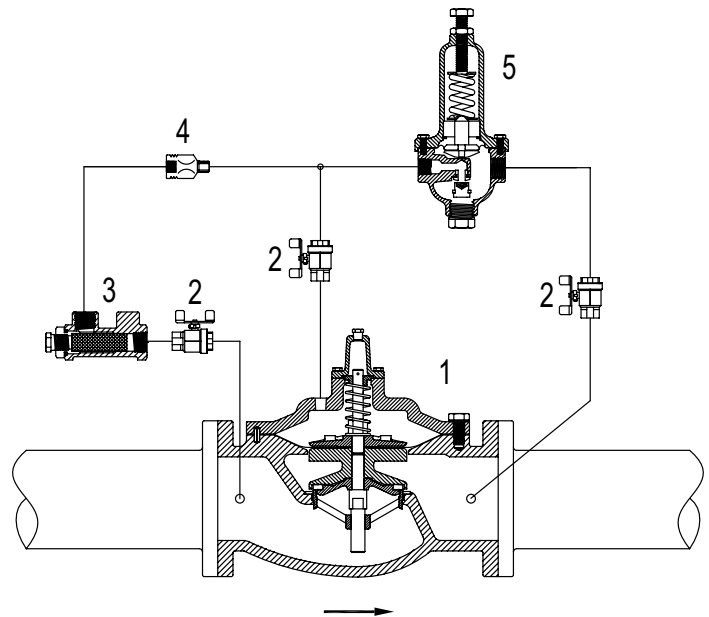

Schematic A-10159B UL

Note: UL listed valves use rolling diaphragm on 6 in/150 mm and 8 in/200 mm valves. ULC listed valves use flat diaphragms only. For UL dimensions, ULC dimensions and Grooved dimensions, see page 26.

Model M106-PR-10159 UL / M106-PR-8702A ULC

Pressure Reducing Valve

Standard Materials

for pilot system components are:

- ASTM B62 bronze or ASTM B16 brass
- AISI 303/316 stainless steel trim
- Buna-N / EPDM diaphragm and seals

PR-10159 - UL Listed		
Valve Size	Max Pressure/Class 150	Max Pressure/Class 300
2 in/50 mm - 4 in/100 mm	175 psig/12.06 barg	300 psig/20.68 barg
6 in/150 mm - 8 in/200 mm	175 psig/12.06 barg	Pending

PR-8702A - ULC Listed		
Valve Size	Max Pressure	
	Class 150	Class 300
Globe 2 in/50 mm - 8 in/200 mm	175 psig/12.06 barg	400 psig/27.6 barg
Angle 2 in/50 mm - 8 in/200 mm	175 psig/12.06 barg	400 psig/27.6 barg

Model M106-F-Type 4

Modulating Float Valve

The Model M106-F-Type 4 modulating float valves are based on the M106-PG main valve. They are ideal for balancing the inflow and outflow demand into the storage tank and maintaining level at the designated maximum.

The valve closes drip-tight at the maximum level and modulates to maintain the tank level. The float pilot is remotely installed at the high level in the storage tank. Pilot connections to the main valve are connected in the field. As the tank level drops the main valve is opened proportionally to increase the filling rate. Movement of the main stem alters the size of the closing restriction, interrupting the tendency of the valve to hunt.



Features

- Maintains relatively constant level
- Automatic compensation for level draw-down
- Standard integral damping reduces hunting
- Drip-tight at high level shut-off
- Low supply pressure options


Schematic Drawing

1. Main Valve - M106-PG, SPG or GE, Internal Needle Stem Valve (INSV) built into stem

Available in 1/2 in/15 mm to 8 in/200 mm, FNTTP 1/2 in/15 mm to 1 in/15 mm, Flanged 1-1/2 in/40 mm to 8 in/200 mm, Grooved 2 in/50 mm to 8 in/200mm, Globe style only

2. Isolation valve
3. Strainer - 40 mesh stainless steel screen
4. R400 Float Pilot comes with plastic float

Note: Schematic shown for 2.5 in/65 mm and larger

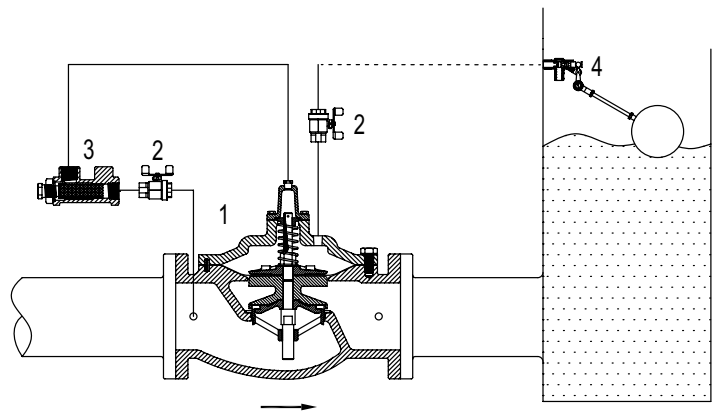

Schematic A-0608D

Standard Materials

for pilot system components are:

- ASTM B62 bronze or ASTM B16 brass
- Stainless steel

Note: The stilling well and the connections between main valve and pilot completed by others.

Models M106-F-Type 5

Non-Modulating Float Valve

The M106-F-Type 5 non-modulating float valves are based on the M106-PG main valve. It is ideal for allowing normal forward flow to fill water tanks to a desired high level and where the pilot and valve of the storage tanks are easily accessible.

The valve functions as a two position valve, either open or closed. The valve remains closed when the tank level drops, until the float reaches the pre-determined adjustable minimum tank level. The F-Type 5 valve then opens to refill the tank and closes tightly when high water level is achieved.

Features

- No overflow, drip-tight closure
- Adjustable draw down
- Easily adjustable level settings
- Low supply pressure options



Schematic Drawing

1. Main Valve - M106-PG, SPG or GE
Available in 1 in/25mm to 8 in/200 mm, FNTF 1 in/25 mm to 3 in/80 mm, Flanged 1 1/2 in/40 mm to 8 in/200 mm, Grooved 2 in/50 mm to 8 in/200 mm, Globe style only
2. Isolation valve
3. Strainer - 40 mesh stainless steel screen
4. Model M43 Float Pilot comes with Stainless Steel float, 4 ft/1.2 m stainless steel rod - 8" (200mm) and larger, - 2 ft/600 mm stainless steel rod - 6" (150 mm) and smaller


Note: Schematic shown for 2.5 in / 65 mm and larger

Standard Materials

for pilot system components are:

- ASTM B62 bronze or ASTM B16 brass
- Stainless steel

Note: The stilling well and the connections between main valve and pilot completed by others.

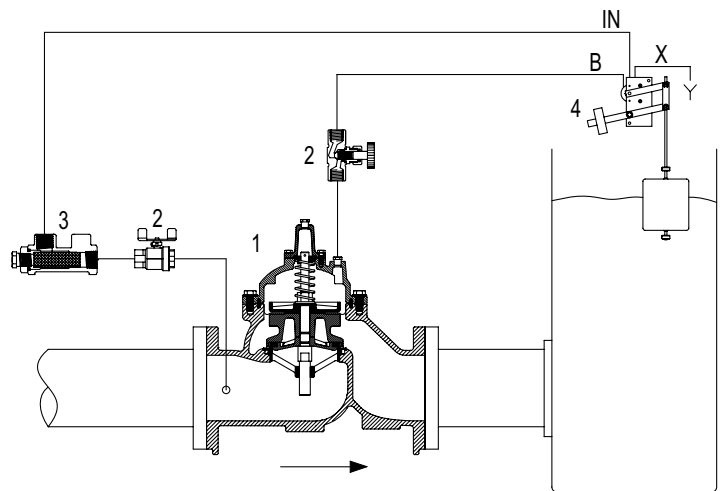


Schematic A-0421C

8" (200mm) stilling well must be provided around float.

Models M106-F-Type 5

Non-Modulating Float Valve

Dimensions

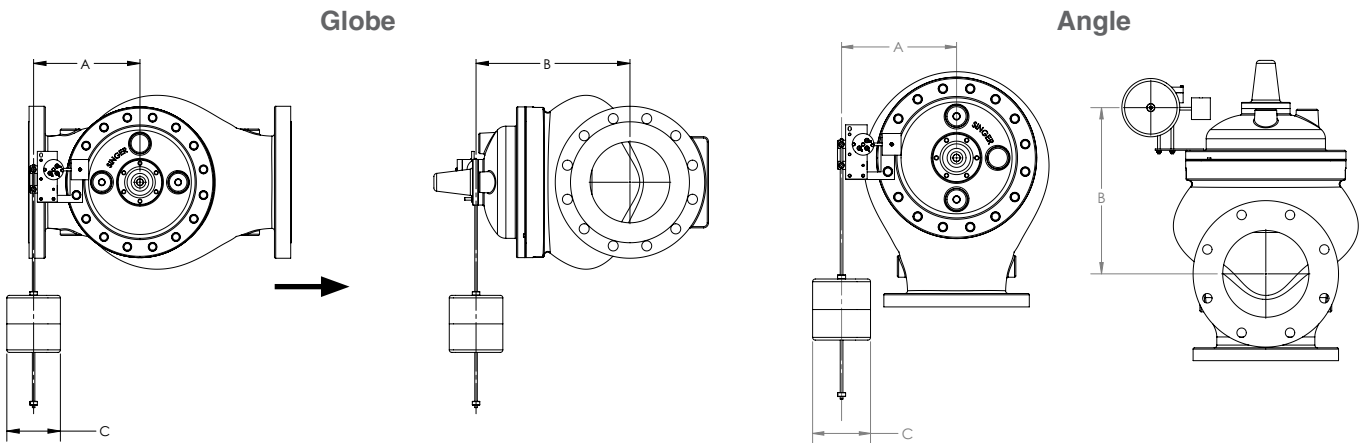

Globe

Description			US Units (inches)			Metric Units (mm)		
US Units (inches)	Metric Units (mm)	Body	A	B	C	A	B	C
0.5	15	M106	2.50	4.25	5.38	64	108	137
1	25	M106	5.50	4.75	5.38	140	121	137
1.5	40	M106	6.00	6.75	5.38	152	171	137
2	50	M106	6.25	7.00	5.38	159	178	137
2.5	65	M106	6.75	7.75	5.38	171	197	137
3	75	M106	7.25	8.25	5.38	184	210	137
3	75	M206	6.25	7.06	5.38	159	179	137
4	100	M106	8.00	9.50	5.38	203	241	137
4	100	M106	7.25	7.50	5.38	184	191	137
6	150	MS106	10.25	10.50	5.38	260	267	137
6	150	M206	8.00	8.75	5.38	203	222	137
8	200	MS106	10.23	11.33	5.38	260	288	137
8	200	M206	10.25	9.75	5.38	260	248	137

Angle

Description			US Units (inches)			Metric Units (mm)		
US Units (inches)	Metric Units (mm)	Body	A	B	C	A	B	C
1.5	40	MA106	-	-	5.38	-	-	137
2	50	MA106	6.25	7.00	5.38	159	178	137
2.5	65	MA106	6.75	7.75	5.38	171	197	137
3	75	MA106	7.25	7.06	5.38	184	179	137
4	100	MA106	8.25	9.00	5.38	210	229	137
4	100	MA206	7.25	7.50	5.38	184	191	137
6	150	MA206	8.25	8.75	5.38	210	222	137
6	150	MSA206	10.50	10.00	5.38	267	254	137
8	200	MSA106	10.23	11.94	5.38	260	303	137
8	200	MA206	10.50	9.75	5.38	267	248	137

Models M106-A-Type 2

One-Way Flow Altitude Control Valve


The M106-A-Type 2 altitude control valves are based on the M106-PG main valve, and is ideal for maintaining a preset maximum water level.

The valve functions as a two position control valve, either fully open or fully closed. The Type 2 valve allows normal forward flow to fill the storage tank to the maximum level and then closes drip-tight at the set-point. It opens to refill the tank once the level drops a fixed distance below the high water level.

Note: This valve does not operate as a check valve to prevent reverse flow.

Features

- No overflows - high level shut-off maintained to close tolerances
- Superior repeatability
- Positive shut-off
- Easily serviceable at ground level

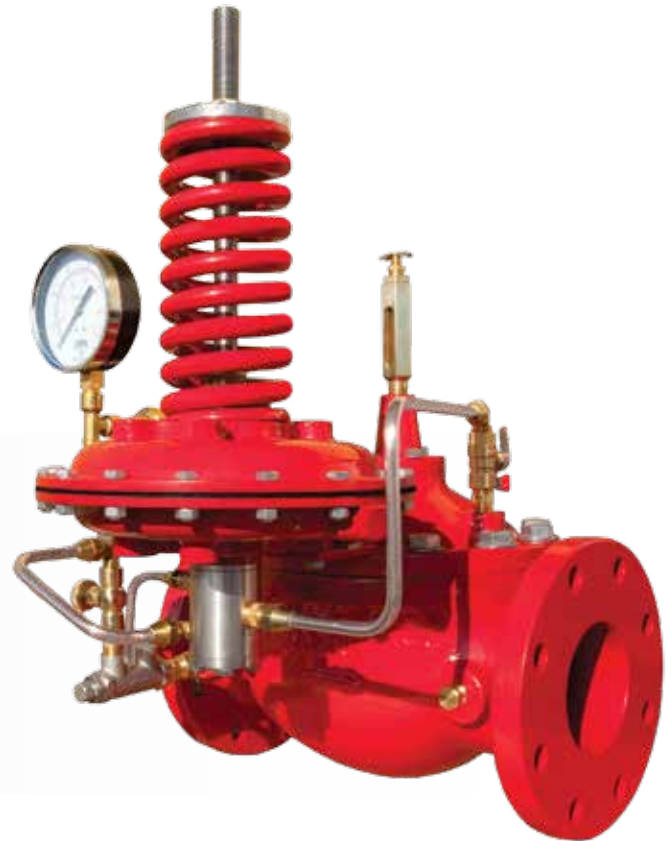


Schematic Drawing

1. Main Valve - M106-PG, SPG or GE with X107 visual position indicator.

Available in 2 in/50 mm to 8 in/200 mm, FNTF 2 in/50 mm to 3 in/80 mm, Flanged 2-1/2 in/63 mm to 8 in/200 mm, Grooved 2 in/50 mm to 8 in/200 mm, Globe style only

2. Strainer - 40 mesh stainless steel screen
3. Model M301-4 altitude pilot
4. Closing speed control
5. Altitude Gauge - dual scale - feet and meter
6. Isolation valve
7. Union
8. Sensing connection to storage tank (complete in field by others)
9. Isolation valve

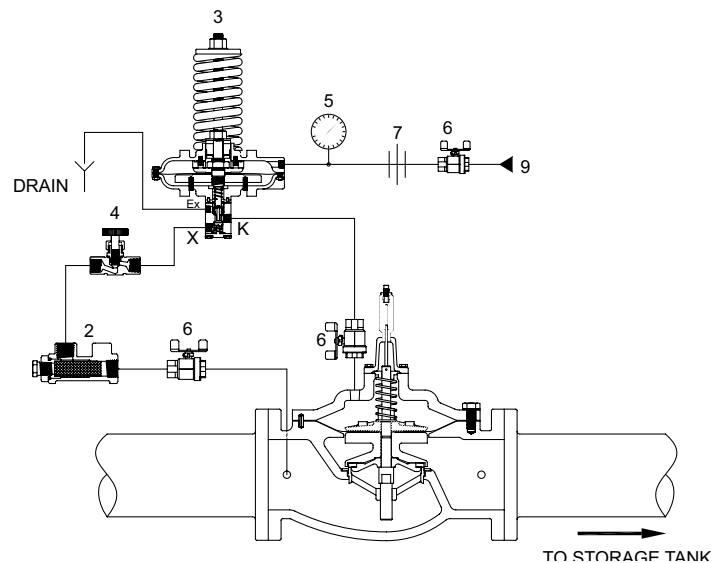

Standard Materials

for pilot system components are:

- Ductile iron
- Brass
- Stainless steel
- Copper

Models M106-A-Type 4

One-Way Flow Altitude Control Valve with Differential Control


The M106-A-Type 4 altitude control valves are based on the M106-PG main valve, and is ideal for maintaining a preset maximum water level. The valve functions as a two position control valve, either fully open or fully closed.

The Type 4 allows normal forward flow to fill the storage tank to the maximum level, then closes drip-tight at the set-point. It opens to refill the tank once the level drops an adjustable amount below the high water level.

Note: Distribution from the storage tank is through a separate pipeline. This valve does not operate as a check valve to prevent reverse flow.

Features

- No overflows
- Adjustable draw-down level (differential) set-point
- Superior repeatability
- Positive shut-off
- Adjustable draw-down for improved water cycling

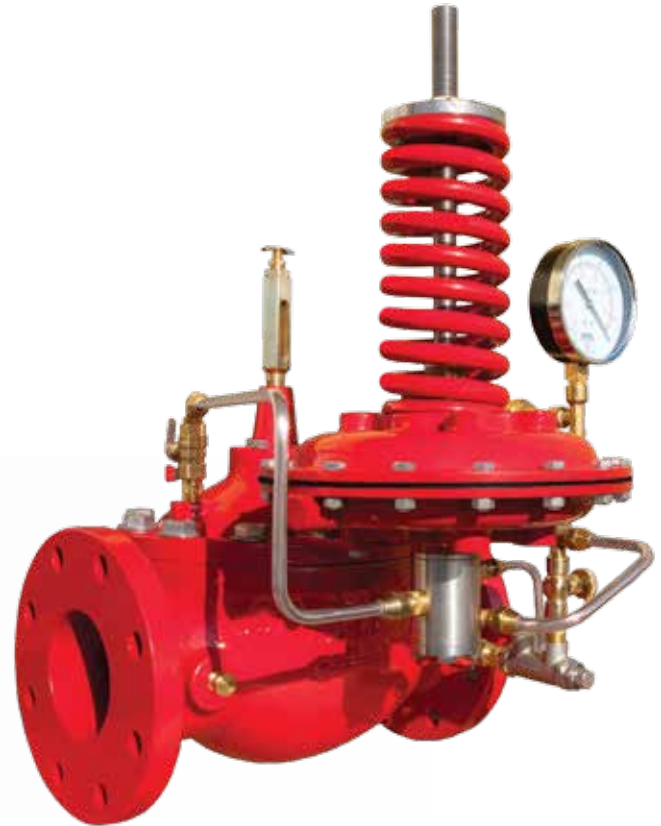


Schematic Drawing

1. Main Valve - M106-PG, SPG or GE with X107 visual position indicator.

Available in 2 in/50 mm to 8 in/200 mm, FNTF 2 in/50 mm to 3 in/80 mm, Flanged 2-1/2 in/63 mm to 8 in/200 mm, Grooved 2 in/50 mm to 8 in/200 mm, Globe style only

2. Isolation valve
3. Strainer - 40 mesh stainless steel screen
4. Closing speed control
5. Model M301-4 altitude pilot
6. Model M106-RD differential pilot
7. Altitude gauge - dual scale - feet & meter
8. Sensing connection to storage tank (complete in field)
9. Model M10 check valve
10. Union

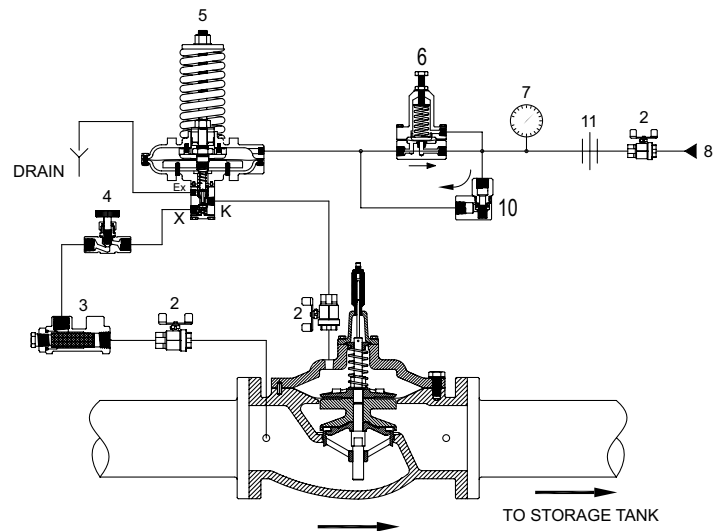

Schematic A-0415C

Standard Materials

for pilot system components are:

- Ductile iron
- Brass
- Stainless steel
- Copper

Model M106-PG/MS106-PG, M106-GE

Full Port, Single Chamber, Hydraulically Operated Valve


The M106-PG series control valve is designed to suit a large variety of applications such as pressure, flow or level control. This hydraulically operated valve introduces or releases water from the control chamber above the diaphragm to effectively maintain accurate water control.

Features

- Available in Globe & Angle styles

Schematic Drawing

1. Removeable stem cap
2. ASTM A536 ductile iron construction
3. Diaphragm Buna-N or EPDM
4. Buna-N or EPDM resilient disc
5. AISI 316 stainless steel seat
6. AISI 316 stainless steel stem
7. HFE coating AKZO RAL 3000 Fire Red

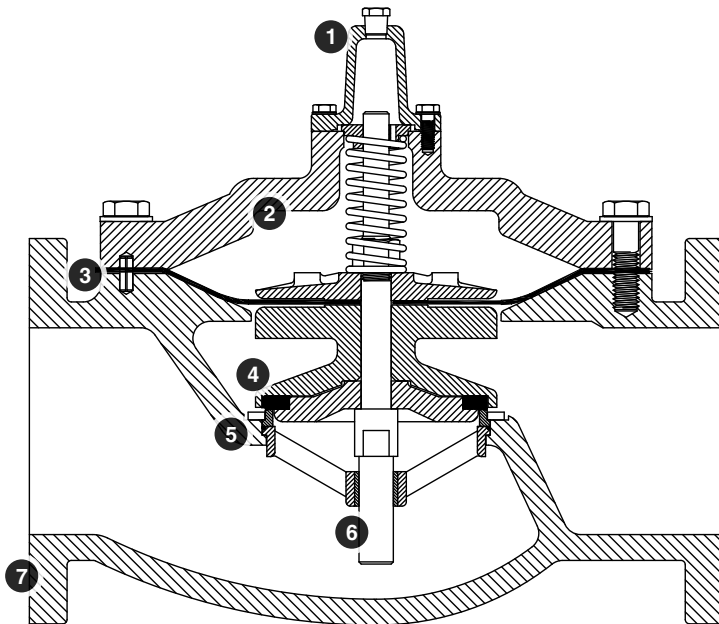

MS106-PG



M106-PG Globe - Flat

Alternative Models



M106-PG Angle



M106-PG Threaded



M106-GE Globe

Model M106-PG/MS106-PG, M106-GE

Full Port, Single Chamber, Hydraulically Operated Valve

Valve Sizes & Materials

Valve Styles

Available Sizes	Ductile			Stainless Steel	
	Threaded	Flanged	Grooved	Threaded	Flanged
Globe	1 in to 3 in (25-80 mm)	1-1/2 in to 36 in (40-900 mm)	2 in to 8 in (50-200 mm)	1/2 in to 2 in (15-50 mm)	1-1/2 in to 6 in (40-150 mm)
Angle	1 in to 3 in (25-80 mm)	2 in to 12 in, 16 in (50-300 mm, 400 mm)	N/A	N/A	N/A

Valve Components

	Ductile	
	Standard	Optional
1. Valve Body, Cover	65-45-12 Ductile Iron	-
2. Seat Ring	316 Stainless Steel	-
3. Disc Retainer	B16 Brass / B62 Bronze / A536 Ductile Iron	Stainless Steel
4. Stem	316 Stainless Steel	-
5. Stem Nut	B16 Brass	316 Stainless Steel
6. Spring	316 Stainless Steel	-
7. Guide Bushings	B16 Brass or SAE 660 Bronze	Stainless Steel
8. Diaphragm	EPDM	Buna-N / Viton (limited sizes)
9. Resilient Disc	EPDM	Buna-N / Viton (limited sizes)
10. Coating	HFE Coating AKZO RAL 3000 Fire Red	Consult factory
11. Fasteners	18-8 Stainless Steel	316 Stainless Steel

Model M106-PG/MS106-PG, M106-GE

Full Port, Single Chamber, Hydraulically Operated Valve

Specifications

- Valve(s) shall be a hydraulically operated globe / angle valve. The inner valve assembly shall be top and bottom guided by means bearing bushings. The inner valve assembly shall be the only moving part and shall be securely mounted on a AISI 316 Stainless Steel stem. Lower grades of Stainless Steel stems will not be acceptable.
- The stainless steel stem shall be provided with wrench flats on all valves 1 in/25 mm to 16 in/400 mm, for ease of assembly and maintenance. Wrench flats will be fully accessible when inner valve is assembled.
- All pressure containing components shall be constructed of ASTM A536 grade 65/45/12 ductile iron. The flanges shall be designed to ANSI Class 150 or Class 300 standards. Main valve body shall be complete with grooved ends. Standard cut groove specifications will be “steel and other IPS pipe” only to ANSI/AWWA C606 unless otherwise specified.
- Valve(s) shall have a protective fusion bonded epoxy coating internally and externally. The protective fusion bonded epoxy coating shall conform to the ANSI/AWWA C116/A21.16 (current version) specification. No machining of any external parts after final coating will be acceptable to ensure a continuous coating surface throughout the entire valve.
- The valve cover shall have a separate stem cap on valves larger than 2½ in/65 mm giving access to the stem for alignment check, spring installation and ease of assembly.
- On valve(s) 1 in/25 mm and larger, bonnets shall be accurately located to bodies utilizing locating pins. Locating pins shall eliminate corrosion resulting from the use of uncoated ductile iron to ductile iron surfaces. Valves with lipped spigot covers shall not be acceptable due to risk of rust and difficulty in assembly.
- Valve(s) 3 in/80 mm to 8 in/200 mm shall have the AISI 316 Stainless Steel seat with integral bottom guide, bolted in place, utilizing Spiralock™ thread tapping technology. The AISI 316 Stainless Steel seat ring shall be easily replaceable without special tools. Valves 10 in/250 mm and larger shall incorporate a two-piece seat and bottom guide design.
- The valve(s) shall form a drip-tight seal between the stationary stainless steel seat ring and the resilient disc, which has a rectangular cross-section and is retained by clamping on three and one half sides. The resilient disc shall be constructed of Buna-N or EPDM for normal service conditions.
- All external fasteners shall be AISI 18-8 Stainless Steel or higher with AISI 18-8 Stainless Steel washers. Mild steel studs or bolts will not be acceptable.
- All repairs and maintenance shall be possible without removing the valve from the line. To facilitate easy removal and replacement of the inner valve assembly and to reduce unnecessary wear on the guide, the stem shall be vertical when the valve is mounted in a horizontal line.
- Each valve shall be air tested prior to shipment. The standard test shall include leakage test, seat leakage test, and stroke test. Refer to IOM 622B for further details (contact Mueller Co.). Where the set-point is provided, Mueller Co. will preset the pilot. Further testing is available upon request at published rates within the capabilities of Mueller Co.’s manufacturing facilities.
- The valve(s) shall be covered by a minimum three year (3) warranty against defects in materials and workmanship. The stainless steel seat shall be covered by a lifetime replacement warranty.
- The valve shall be a Mueller Co. model ____ (insert model number), refer to respective catalogue sections for further details.

Model M106-PG/MS106-PG, M106-GE

Full Port, Single Chamber, Hydraulically Operated Valve

If using the 6 in/150 mm & 8 in/200 mm Flat Diaphragm Valves

- Valve(s) 8 in/ 200 mm and smaller shall provide smooth frictionless motion with actuation being achieved by the use of a flat style EPDM/Buna-N diaphragm. They shall be constructed of nylon fabric bonded with synthetic rubber. The diaphragms shall not be used as a seating surface.
- Valve(s) 10 in/250 mm and larger shall provide smooth frictionless motion and maximum low flow stability with actuation being achieved by the use of the Rolling Diaphragm technology. The diaphragms shall not be used as a seating surface.

If using the 6 in/150 mm & 8 in/200 mm Rolling Diaphragm Valves

- Valve(s) 4 in/100 mm and smaller shall provide smooth frictionless motion with actuation being achieved by the use of a flat style EPDM/Buna-N diaphragm. They shall be constructed of nylon fabric bonded with synthetic rubber. The diaphragms shall not be used as a seating surface.
- Valve(s) 6 in/150 mm and larger shall provide smooth frictionless motion and maximum low flow stability with actuation being achieved by the use of the Rolling Diaphragm technology. The diaphragms shall not be used as a seating surface.

Selection

Automatic control valves operate by introducing or exhausting water from above the diaphragm at controlled rates. A pressure differential is required and is either inlet to outlet or inlet to atmosphere, depending on the application. Valves are sized to provide an appropriate pressure drop for each application. Most valves require a minimum of 10 psig/0.7 barg pressure drop to operate. This applies mostly to valves that have the bonnet vented to downstream. With minimum of 5 psig/0.35 barg downstream pressure, many valves can be made to open fully by venting the bonnet to atmosphere.

Mueller control valves are designed for use with clean potable water. Applications for other media are possible. Consult with Mueller Co.

The M106-PG single chambered valve is the basic valve used in practically every model bearing the M106 description. The pilot systems are designed to meet the functional and performance requirements of specific applications. Sizing is ultimately determined by the specific application.

Model M106-GE/M206-GE

Grooved Ends

For use with grooved Iron Pipe Size (IPS) Pipe Coupling Products, grooved ends allows you to benefit from the simplicity and convenience of grooved end piping and fittings in an automatic control valve. There are a wide range of applications where grooved ends are relevant, but typical applications include municipal water, waste water, fire protection and plumbing.

Grooved ends come in the following size ranges:

- 2 in/50 mm – 8 in/200 mm

Standard cut groove specifications for steel and other IPS pipe will apply, unless otherwise specified

- Main valve body shall be complete with grooved ends.
- Standard cut groove specifications will be “steel and other IPS pipe” only unless otherwise specified.



M106-GE Globe

Features

- Convenient system and equipment access for ease of alignment and installation
- Improved flexibility with expansion, contraction and deflection
- Seismic stress absorption
- Eliminated unions
- Grooved to ANSI/AWWA C606

Model M106-EDV-A-10507A

Electronically Operated Deluge Valve

Model M106 EDV-A-10507A Electric Solenoid control valve is based on the Model M106 PG-UL Deluge main valve.

The solenoid pilot provides on-off position operation. The solenoid either admits inlet pressure into the main valve operating chamber from the inlet of the main valve via a high capacity relay valve or releases pressure from the relay valve and therefore the main valve operating chamber. This either opens or closes the main valve. The pilot system is usually piped to discharge to drain (atmosphere).

The M106 EDV-A-10507A is available with the main valve closed when the solenoid is de-energized (NC-normally closed. This refers to the main valve, not the solenoid).

Features

- UL listed to ANSI/UL 260
- Reliable diaphragm actuated
- Hydraulically operated design
- ANSI class 150, 300 flanges and grooved ends
- Stainless steel fasteners
- Heat fused red epoxy coating
- Available in globe style, 3 in/80mm - 8 in/200mm

Schematic Drawing

1. Main Valve – Model M106-PG-UL-Deluge
2. Strainer
3. Fixed restriction
4. M82-PR-UL Pilot
5. Solenoid Valve – normally open
6. Manual Emergency Override – normal position closed

Standard Materials


for pilot system components are:

- ASTM B62 bronze or ASTM B16 brass
- AISI 303/316 stainless steel trim
- Buna-N/EPDM diaphragm and seals

All valves have HFE coating AKZO RAL 3000 Fire Red (not intended for drinking water).



M106--EDV-A10507A Globe

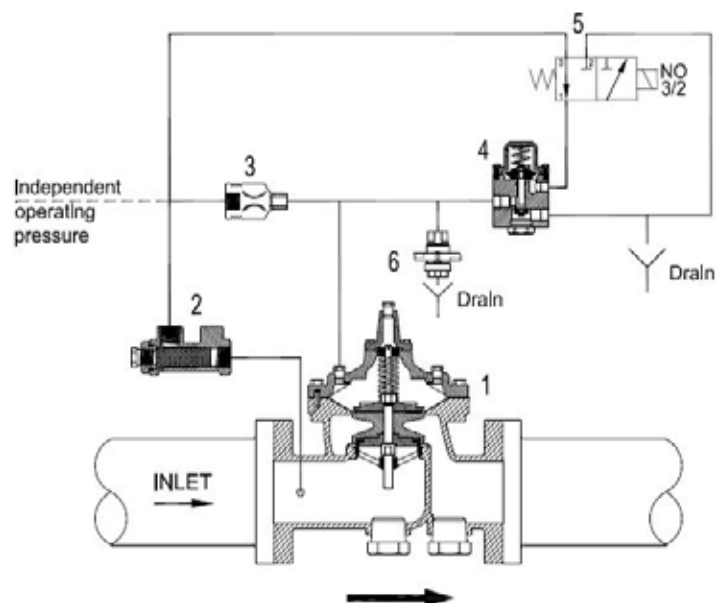

Schematic A-10507A

Model M106-PDV-A-10508A

Pneumatically Operated Remote Control Deluge Valve

Model M106 PDV-A-10508A Pneumatically Operated Control valve is based on the Model M106 PG-UL Deluge main valve.

The high capacity relay valve provides on-off position operation. The high capacity relay valve, using an independent air supply, either admits inlet pressure into the main valve operating chamber from the inlet of the main valve or releases pressure from the operating chamber. The pilot system is usually piped to discharge to drain (atmosphere).

Features

- UL listed to ANSI/UL 260
- Reliable diaphragm actuated
- Hydraulically operated design
- ANSI class 150, 300 flanges and grooved ends
- Stainless steel fasteners
- Heat fused red epoxy coating
- Available in globe style, 3 in/80mm - 8 in/200mm



M106-PDV-A-10508A Globe

Schematic Drawing


1. Main Valve – Model M106-PG-UL-Deluge
2. Strainer
3. Ejector - MX141A
4. M82-PR-UL Pilot
5. Manual Emergency Override – normal position closed

Standard Materials

for pilot system components are:

- ASTM B62 bronze or ASTM B16 brass
- AISI 303/316 stainless steel trim
- Buna-N/EPDM diaphragm and seals

All valves have HFE coating AKZO RAL 3000 Fire Red (not intended for drinking water).

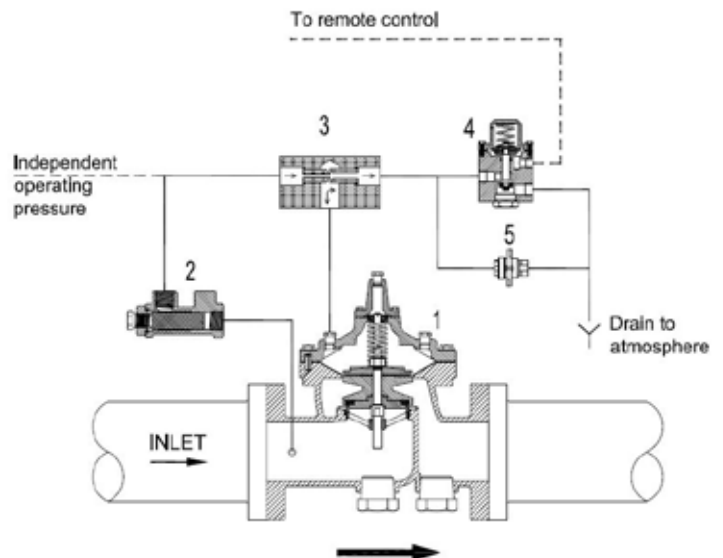

Schematic A-10508AA

Model M106-EPDV-A-10506A

Electric/Pneumatically Operated Deluge Valve

Model M106 EPDV-A-10506A Pneumatic/Electric Solenoid control valve is based on the Model M106 PG-UL Deluge main valve.

The solenoid pilot provides on-off position operation. The solenoid, using an independent air supply, either admits inlet pressure into the main valve operating chamber from the inlet of the main valve via a high capacity relay valve or releases pressure from the relay valve and therefore the main valve operating chamber. This either opens or closes the main valve. The pilot system is usually piped to discharge to drain (atmosphere).

The M106 EPDV-A-10506A is available with the main valve closed when the solenoid is de-energized (NC-normally closed. This refers to the main valve, not the solenoid).



M106-EPDV A-10506A Globe

Features

- UL listed for fire extinguishing systems
- Reliable diaphragm actuated
- Hydraulically operated design
- ANSI class 150, 300 flanges and grooved ends
- Stainless steel fasteners
- Heat fused red epoxy coating
- Available in globe style, 3 in/80mm - 8 in/200mm

Schematic Drawing


1. Main Valve – Model M106-PG-UL-Deluge
2. Strainer
3. Fixed Restriction
4. M82-PR-UL Pilot
4. Solenoid Valve – normally open
5. Manual Emergency Override – normal position closed

Standard Materials

for pilot system components are:

- ASTM B62 bronze or ASTM B16 brass
- AISI 303/316 stainless steel trim
- Buna-N/EPDM diaphragm and seals

All valves have HFE coating AKZO RAL 3000 Fire Red (not intended for drinking water).

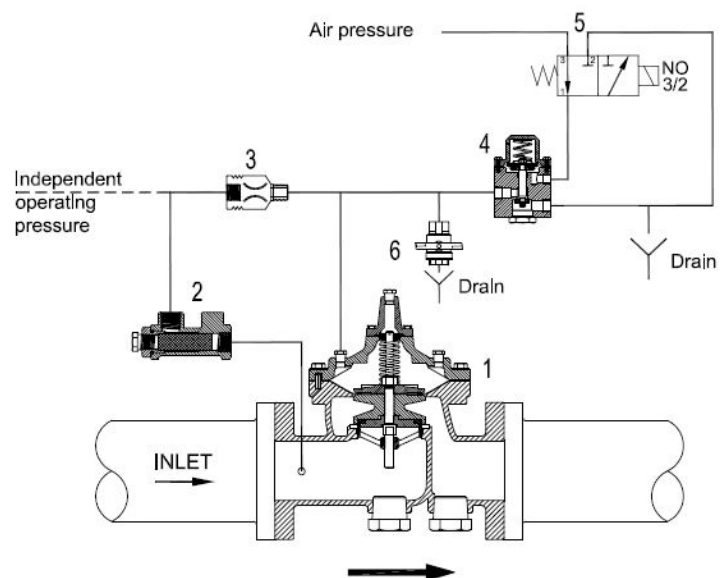


Schematic A-10506A

Model M106-PG

Full Port, Single Chamber, Hydraulically Operated Valve

Dimensions

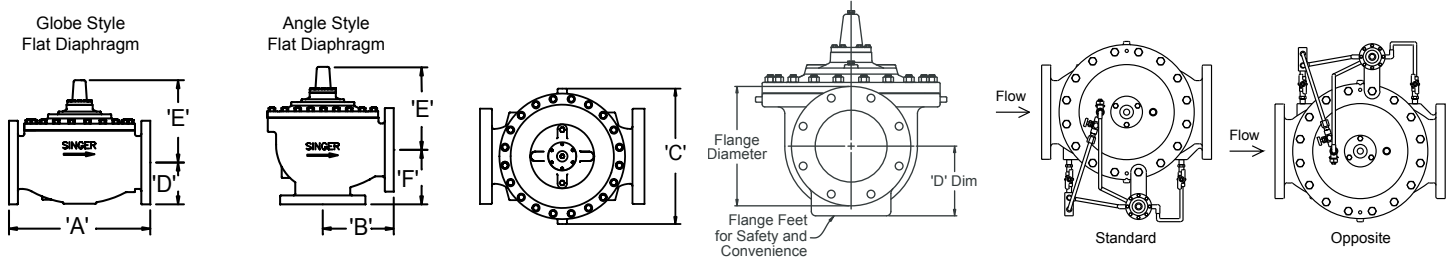

ANSI Valve Data (US Units)

Size	DWG	Standard	Flat Diaphragm System										
Inches	REF	ANSI	1/2 in	3/4 in	1 in	1-1/4 in	1-1/2 in	2 in	2-1/2 in	3 in	4 in	6 in	8 in
Globe Dimensions			All figures shown in inches unless otherwise stated										
Lay Length	A	FNPT	3.50	3.50	6.75	6.75	6.75	9.38	11.00	13.50	-	-	-
Centerline to Bottom	D	FNPT	1.20	1.20	2.50	2.50	2.50	2.75	3.38	3.68	-	-	-
Lay Length	A	150F	-	-	-	-	8.50	9.38	11.00	12.00	15.00	20.00	25.38
Centerline to Bottom	D	150F	-	-	-	-	2.75	3.00	3.50	3.75	4.60	5.60	7.63
Lay Length	A	300F	-	-	-	-	9.00	10.00	11.63	13.25	15.63	21.00	26.38
Centerline to Bottom	D	300F	-	-	-	-	3.25	3.25	3.75	4.13	5.09	6.34	7.88
Angle Dimensions													
Center Inlet to Discharge	B	FNPT	-	-	3.38	3.38	3.38	4.69	5.50	6.63	-	-	-
Center Discharge to Inlet	F	FNPT	-	-	3.00	3.00	3.00	3.25	4.00	4.63	-	-	-
Center Inlet to Discharge	B	150F	-	-	-	-	-	4.75	5.50	6.06	7.50	10.00	12.75
Center Discharge to Inlet	F	150F	-	-	-	-	-	3.25	4.00	4.06	5.00	6.00	8.00
Center Inlet to Discharge	B	300F	-	-	-	-	-	5.00	5.88	6.43	7.88	10.50	13.25
Center Discharge to Inlet	F	300F	-	-	-	-	-	3.50	4.31	4.43	5.31	6.50	8.50
Common Dimensions (Globe & Angle)													
Width	C		3.00	3.00	4.88	4.88	6.13	6.5	8.19	9.25	10.88	16.75	21.63
Height (To Stem Cap) Globe	E		3.06	3.06	4.38	4.38	4.38	6.75	9.5	10.5	12.25	11.75	14.91
Height (To Stem Cap) Angle	E		-	-	4.38	4.38	4.38	4.75	7.71	10.5	12.25	11.75	14.91
Body Port Tapping		FNPT	1/4	1/4	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	1/2
Stem Cap Plug		MNPT	1/4	1/4	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8
Cover Port Tapping		FNPT	-	-	3/8	3/8	3/8	3/8	3/8	3/8	3/8	1/2	1/2
Valve Stroke			1/4	1/4	1/2	1/2	1/2	9/16	15/16	1-1/8	1-7/16	1-11/16	2-7/8
Displaced Bonnet Volume (Gallons)			0.002	0.002	0.007	0.007	0.007	0.02	0.1	0.1	0.2	0.6	1.7
Approximate Shipping Weight (Lbs)			10	10	20	20	20	40	65	100	175	400	650
Flow Capacities (USGPM) Globe & Angle													
C _v - Globe					28	30	32	55	80	110	200	460	800
C _v - Angle					24	24	26	63	90	135	230	535	950
Continuous (Globe)					49	93	125	210	300	460	800	1800	3100
Intermittent (Globe)					61	120	160	260	375	575	1000	2250	3875
Momentary (Globe)					110	170	250	470	670	1030	1800	4000	7000
Maximum Pressure Ratings (Ductile Only)													
PSIG ¹		FNPT			400	400	400	400	400	400	-	-	-
PSIG		150F			-	-	250	250	250	250	250	250	250
PSIG ¹		300F			-	-	400	400	400	400	400	400	400
Maximum Temperature													
Fahrenheit					180°	180°	180°	180°	180°	180°	180°	180°	180°

¹Valves rated and stamped 400 psig as standard. Valves rated and stamped 600 psig on request.

Model MS106-PG

Full Port, Single Chamber, Hydraulically Operated Valve


ANSI Valve Data (US and Metric Units)

Size	DWG	Standard	Rolling Diaphragm System			
			US Units		Metric Units	
Inches/mm	REF	ANSI	6 in	8 in	150 mm	200 mm
Globe Dimensions			inches		mm	
Lay Length	A	-	-	-	-	-
Centerline to Bottom	D	-	-	-	-	-
Lay Length	A	-	20.00	25.38	508	645
Centerline to Bottom	D	-	5.60	7.63	142	200
Lay Length	A	-	21.00	26.38	533	670
Centerline to Bottom	D	-	6.34	7.88	161	200
Angle Dimensions						
Center Inlet to Discharge	B	-	-	-	-	-
Center Discharge to Inlet	F	-	-	-	-	-
Center Inlet to Discharge	B	-	-	-	-	-
Center Discharge to Inlet	F	-	-	-	-	-
Center Inlet to Discharge	B	-	-	-	-	-
Center Discharge to Inlet	F	-	-	-	-	-
Common Dimensions (Globe & Angle)			inches		mm	
Width	C	-	12.75	16.09	324	409
Height (To Stem Cap) Globe	E	-	15.43	20.19	392	513
Height (To Stem Cap) Angle	E	-	-	-	-	-
Body Port Tapping	FNPT	inch	3/8	1/2	3/8	1/2
Stem Cap Plug	MNPT	inch	3/8	3/8	3/8	3/8
Cover Port Tapping	FNPT	inch	1/2	1/2	1/2	1/2
Valve Stroke			1-11/16	2-7/8	43	73
Displaced Bonnet Volume			0.50 gal	1.00 gal	2 L	4 L
Approximate Shipping Weight			350 Lbs	650 Lbs	160 Kg	250 Kg
Flow Capacities Globe & Angle			USGPM		L/s	
C _v - Globe			460	800	110	190
C _v - Angle			-	-	-	-
Continuous (Globe)			1800	3100	114	196
Intermittent (Globe)			2250	3875	142	244
Momentary (Globe)			4000	7000	252	442
Maximum Pressure Ratings (Ductile Only)			PSI		Bar	
		FNPT	-	-	-	-
		150F	250	250	17	17
		300F	400	400	27.6	27.6
Maximum Temperature			Fahrenheit		Celcius	
			180°	180°	82°	82°

Model M106-PG

Full Port, Single Chamber, Hydraulically Operated Valve

Dimensions

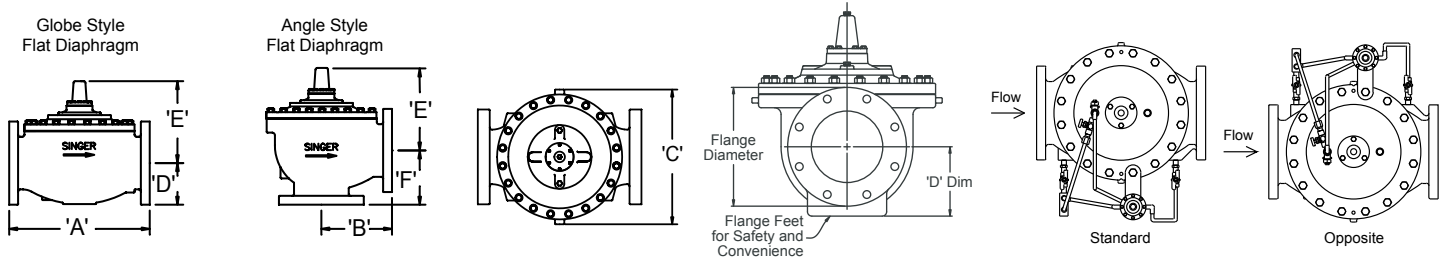

ANSI Valve Data (Metric Units)


Size	DWG	Standard	Flat Diaphragm System										
mm	REF	ISO	15 mm	20 mm	25 mm	32 mm	40 mm	50 mm	65 mm	80 mm	100 mm	150 mm	200 mm
Globe Dimensions			All figures show in mm unless otherwise stated										
Lay Length	A	-	89	89	171	171	171	238	279	343	-	-	-
Centerline to Bottom	D	-	31	31	64	64	64	70	86	93	-	-	-
Lay Length	A	-	-	-	-	-	229	238	279	318	381	508	645
Centerline to Bottom	D	-	-	-	-	-	83	76	89	100	117	142	200
Lay Length	A	-	-	-	-	-	229	238	279	318	397	533	670
Centerline to Bottom	D	-	-	-	-	-	83	76	89	100	129	161	200
Angle Dimensions													
Center Inlet to Discharge	B	-	-	-	86	86	86	119	140	168	-	-	-
Center Discharge to Inlet	F	-	-	-	76	76	76	83	102	118	-	-	-
Center Inlet to Discharge	B	-	-	-	-	-	-	121	140	163	191	254	324
Center Discharge to Inlet	F	-	-	-	-	-	-	83	102	113	127	152	203
Center Inlet to Discharge	B	-	-	-	-	-	-	121	140	163	200	267	337
Center Discharge to Inlet	F	-	-	-	-	-	-	83	102	113	135	165	216
Common Dimensions (Globe & Angle)													
Width	C	-	76	76	124	124	156	152	208	235	276	425	549
Height (To Stem Cap) Globe	E	-	78	78	111	111	111	121	191	203	232	298	379
Height (To Stem Cap) Angle	E	-	-	-	111	111	111	121	191	203	232	298	379
Body Port Tapping	FNPT	Inches	1/4	1/4	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	1/2
Stem Cap Plug	MNPT	Inches	1/4	1/4	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8
Cover Port Tapping	FNPT	Inches	-	-	3/8	3/8	3/8	3/8	3/8	3/8	3/8	1/2	1/2
Valve Stroke		mm	6.4	6.4	13	13	13	14	25	29	37	43	73
Displaced Bonnet Volume (Litres)			0.01	0.01	0.03	0.03	0.03	0.1	0.3	0.3	0.8	2.1	6.3
Approximate Shipping Weight (Kilograms)			5	5	9	9	9	18	29	45	79	181	295
Flow Capacities (L/s) Globe & Angle													
K _v - Globe			-	-	6.6	7.1	7.6	13	19	26	47	110	190
K _v - Angle			-	-	5.7	5.7	6.2	15	21	32	55	123	225
Continuous (Globe)			-	-	3	6	8	13	19	29	50	114	196
Intermittent (Globe)			-	-	4	8	10	16	24	36	63	142	244
Momentary (Globe)			-	-	7	11	16	30	42	65	114	252	442
Maximum Pressure Ratings (Ductile Only)													
Barg ¹		-	27.6	27.6	27.6	27.6	27.6	27.6	27.6	27.6	-	-	-
Barg		-	-	-	-	-	16	16	16	16	16	16	16
Barg ¹		-	-	-	-	-	25	25	25	25	25	25	25
Maximum Temperature													
Celcius			82°	82°	82°	82°	82°	82°	82°	82°	82°	82°	82°

¹Valves rated and stamped 27.6 barg as standard. Valves rated and stamped 41 barg on request

Model M106-PG - UL/FM Relief & ULC Reducing Only

Full Port, Single Chamber, Hydraulically Operated Valve

Dimensions

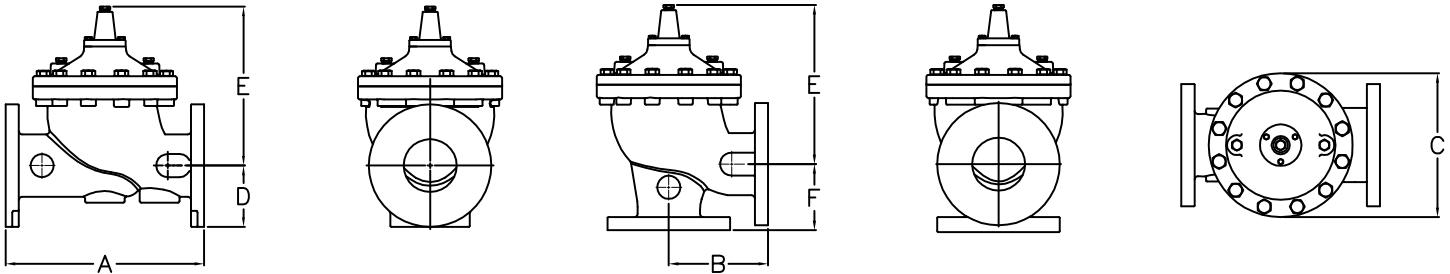

ANSI Valve Data (US Units)


Size	DWG	Standard	Flat Diaphragm System					
Inches	REF	ANSI	2 in	2-1/2 in	3 in	4 in	6 in	8 in
Globe Dimensions			All figures show in inches unless otherwise stated					
Lay Length	A	FNPT	9.38	11.00	13.50	-	-	-
Centerline to Bottom	D	FNPT	2.75	3.38	3.68	-	-	-
Lay Length	A	150F	9.38	11.00	12.00	15.00	20.00	25.38
Centerline to Bottom	D	150F	3.00	3.50	3.75	4.60	5.60	7.63
Lay Length	A	300F	10.00	11.63	13.25	15.63	21.00	26.38
Centerline to Bottom	D	300F	3.25	3.75	4.13	5.09	6.34	7.88
Angle Dimensions								
Center Inlet to Discharge	B	FNPT	4.69	5.50	6.63	-	-	-
Center Discharge to Inlet	F	FNPT	3.25	4.00	4.63	-	-	-
Center Inlet to Discharge	B	150F	4.75	5.50	6.06	7.50	10.00	12.75
Center Discharge to Inlet	F	150F	3.25	4.00	4.06	5.00	6.00	8.00
Center Inlet to Discharge	B	300F	5.00	5.88	6.43	7.88	10.50	13.25
Center Discharge to Inlet	F	300F	3.50	4.31	4.43	5.31	6.50	8.50
Common Dimensions (Globe & Angle)								
Width	C	-	6.50	8.19	9.25	10.88	16.75	21.63
Height (To Stem Cap) Globe	E	-	4.75	7.50	8.00	9.15	11.75	14.91
Height (To Stem Cap) Angle	E	-	4.75	7.50	8.00	9.15	11.75	14.91
Body Port Tapping		FNPT	3/8	3/8	3/8	3/8	3/8	1/2
Stem Cap Plug		MNPT	3/8	3/8	3/8	3/8	3/8	3/8
Cover Port Tapping		FNPT	3/8	3/8	3/8	3/8	1/2	1/2
Valve Stroke			9/16	15/16	1-1/8	1-7/16	1-11/16	2-7/8
Displaced Bonnet Volume (Gallons)			0.02	0.1	0.1	0.2	0.6	1.7
Approximate Shipping Weight (Lbs)			40	65	100	175	400	650
Flow Capacities (USGPM) Globe & Angle								
C _v - Globe			55	80	110	200	460	800
C _v - Angle			63	90	135	230	535	950
Continuous (Globe)			210	300	460	800	1800	3100
Intermittent (Globe)			260	375	575	1000	2250	3875
Momentary (Globe)			470	670	1030	1800	4000	7000
Maximum Pressure Ratings (Ductile Only)								
PSIG ¹		FNPT	400	400	400	-	-	-
PSIG		150F	250	250	250	250	250	250
PSIG ¹		300F	400	400	400	400	400	400
Maximum Temperature								
Fahrenheit			180°	180°	180°	180°	180°	180°

¹ Valves rated and stamped 400 psig as standard. Valves rated and stamped 600 psig on request.

Model M106-PG - UL/FM Relief & ULC Reducing Only

Full Port, Single Chamber, Hydraulically Operated Valve

Dimensions

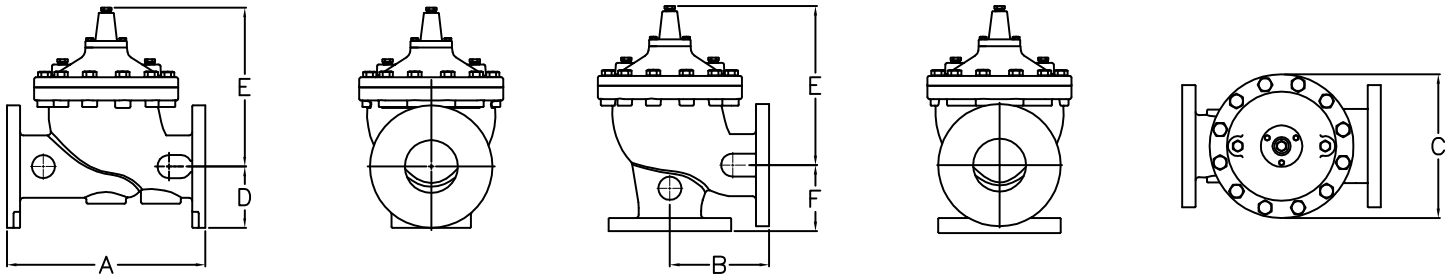

ANSI Valve Data (Metric Units)

Size	DWG	Standard	Flat Diaphragm System					
mm	REF	ANSI	50 mm	65 mm	80 mm	100 mm	150 mm	200 mm
Globe Dimensions			All figures show in mm unless otherwise stated					
Lay Length	A	FNPT	238	279	343	-	-	-
Centerline to Bottom	D	FNPT	70	86	93	-	-	-
Lay Length	A	150F	238	279	305	381	508	645
Centerline to Bottom	D	150F	76	89	95	117	142	200
Lay Length	A	300F	254	295	337	397	533	670
Centerline to Bottom	D	300F	83	95	105	129	161	200
Angle Dimensions								
Center Inlet to Discharge	B	FNPT	119	140	168	-	-	-
Center Discharge to Inlet	F	FNPT	83	102	118	-	-	-
Center Inlet to Discharge	B	150F	121	140	154	191	254	324
Center Discharge to Inlet	F	150F	83	102	103	127	152	203
Center Inlet to Discharge	B	300F	127	149	163	200	267	337
Center Discharge to Inlet	F	300F	89	109	113	135	165	216
Common Dimensions (Globe & Angle)								
Width	C	-	165	208	235	276	425	549
Height (to stem cap) Globe	E	-	121	191	203	232	298	379
Height (to stem cap) Angle	E	-	121	191	203	232	298	379
Body Port Tapping	FNPT	in	3/8	3/8	3/8	3/8	3/8	1/2
Stem Cap Plug	MNPT	in	3/8	3/8	3/8	3/8	3/8	3/8
Cover Port Tapping	FNPT	in	3/8	3/8	3/8	3/8	1/2	1/2
Valve Stroke		mm	14	25	29	37	43	73
Displaced Bonnet Volume (Litres)			0.1	0.3	0.3	0.8	2.1	6.3
Approximate Shipping Weight (Kilograms)			18	29	45	79	181	295
Flow Capacities (L/s) Globe & Angle								
Kv - Globe			13	19	26	47	110	190
Kv - Angle			15	21	32	55	127	225
Continuous (Globe)			13	19	29	50	114	196
Intermittent (Globe)			16	24	36	63	142	244
Momentary (Globe)			30	42	65	114	252	442
Maximum Pressure Ratings (Ductile Only)								
Barg ¹		FNPT	27.6	27.6	27.6	-	-	-
Barg		150F	17	17	17	17	17	17
Barg ¹		300F	27.6	27.6	27.6	27.6	27.6	27.6
Maximum Temperature								
Celcius			82°	82°	82°	82°	82°	82°

¹Valves rated and stamped 27.6 barg as standard. Valves rated and stamped 41 barg on request

Model M106-GE/MS106-GE

Grooved Ends

Valve Data (US Units)

	DWG	Standard	Flat Diaphragm System				Single Rolling Diaphragm System	
Inches	REF	Grooved Ends	2 in	2-1/2 in	3 in	4 in	6 in	8 in
Globe Dimensions			All figures shown in inches unless otherwise stated					
Lay Length	A	-	9.00	11.00	12.50	15.00	20.00	25.37
Centerline to Bottom	D	-	1.31	1.54	2.25	2.81	4.00	5.00
Common Dimensions (Globe)								
Width	C	-	5.87	7.75	9.25	10.88	12.13	17.16
Height (To Stem Cap) Globe	E	-	6.35	9.32	10.06	11.74	15.01	19.70
Body Port Tapping		FNPT	3/8	3/8	3/8	3/8	3/8	1/2
Stem Cap Plug		MNPT	3/8	3/8	3/8	3/8	3/8	3/8
Cover Port Tapping		FNPT	3/8	3/8	3/8	3/8	3/8	1/2
Valve Stroke			9/16	15/16	1 1/8	1 7/16	1 11/16	2 7/8
Displaced Bonnet Volume (Gallons)			0.02	0.07	0.1	0.2	0.6	1.7
Approximate Shipping Weight (Lbs)			28	49	80	148	350	590
Flow Capacities (USGPM) Globe								
C _v			55	80	110	200	460	800
Continuous (Globe)			210	300	460	800	1800	3100
Intermittent (Globe)			260	375	575	1000	2250	3875
Momentary (Globe)			470	670	1030	1800	4000	7000
Maximum Pressure Ratings (Ductile Only)								
PSIG		Grooved Ends	400	400	400	400	400	400
Maximum Temperature								
Fahrenheit			180°	180°	180°	180°	180°	180°


Valve Data (Metric Units)

	DWG	Standard	Flat Diaphragm System				Single Rolling Diaphragm System	
MM	REF	Grooved Ends	50 mm	65 mm	80 mm	100 mm	150 mm	200 mm
Globe Dimensions			All figures shown in millimeters unless otherwise stated					
Lay Length	A	-	229	279	318	381	508	645
Centerline to Bottom	D	-	33	39	57	71	102	127
Common Dimensions (Globe)								
Width	C	-	149	197	235	276	308	436
Height (To Stem Cap) Globe	E	-	161	237	256	298	381	500
Body Port Tapping	FNPT	Inches	3/8	3/8	3/8	3/8	3/8	1/2
Stem Cap Plug	MNPT	Inches	3/8	3/8	3/8	3/8	3/8	3/8
Cover Port Tapping	FNPT	Inches	3/8	3/8	3/8	3/8	3/8	1/2
Valve Stroke	-	mm	14	25	29	37	43	73
Displaced Bonnet Volume (Litres)			0.1	0.3	0.3	0.8	2.1	6.3
Approximate Shipping Weight (Kilograms)			13	22.2	37	67	160	268
Flow Capacities (L/s) Globe								
K _v (Globe)			13	19	26	47	110	190
Continuous (Globe)			13	19	29	50	114	196
Intermittent (Globe)			16	24	36	63	142	244
Momentary (Globe)			30	42	65	114	252	442
Maximum Pressure Ratings (Ductile Only)								
Barg		Grooved Ends	27.6	27.6	27.6	27.6	27.6	27.6
Maximum Temperature								
Celcius			82°	82°	82°	82°	82°	82°

Model M106-EDV-A-10507A

Electronically Operated Deluge Valve

Dimensions

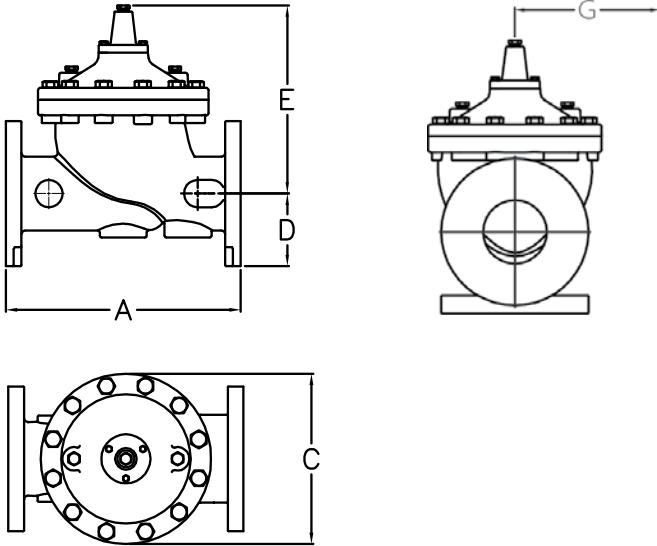

Clearance for pilot system

Deluge Valves - UL Listed	
Valve Size	Max Pressure
3 in/80mm - 8 in / 200mm	400 psig/27.6 barg

Weights (Lbs)	3"	4"	6"	8"
150# Flanged	84	128	183	372
300# Flanged	88	140	224	425

Weights (Kg)	80 mm	100 mm	150 mm	200 mm
150# Flanged	38	58	83	169
300# Flanged	40	63.5	102	193

ANSI Valve Data (US Units)

Size	DWG	US Units				
Inches	REF	ANSI	3 in	4 in	6 in	8 in
Globe Dimensions		<i>All figures shown in mm unless otherwise indicated</i>				
Lay Length	A	150F	12.00	15.00	20.00	25.38
Centerline to Bottom	D	150F	3.75	4.60	5.60	7.63
Lay Length	A	300F	.25	15.63	21.00	26.38
Centerline to Bottom	D	300F	4.13	5.09	6.34	7.88
Width	C	-	9.25	10.88	12.75	16.09
Height (To Stem Cap)	E	-	8.00	9.15	15.43	20.19
Pilot System Clearance	G	-	9.84	10.62	11.81	13.38
Body Port Tapping		FNPT	3/8	3/8	3/8	1/2
Stem Cap Plug		MNPT	3/8	3/8	3/8	3/8
Cover Port Tapping		FNPT	3/8	3/8	1/2	1/2
Valve Stroke			1-1/8	1-7/16	1-11/16	2-7/8
Displaced Bonnet Volume (Gallons/Litres)			0.1	0.2	0.50	1.00
Flow Capacities USGPM						
C _v			110	200	460	800
Continuous			460	800	1800	3100
Intermittent			575	1000	2250	3875
Momentary			1030	1800	4000	7000
Maximum Temperature						
Fahrenheit/Celsius			180°	180°	180°	180°

Metric Units			
80 mm	100 mm	150 mm	200 mm
<i>All figures shown in mm unless otherwise indicated</i>			
305	381	508	645
95	117	142	200
337	397	533	670
105	129	161	200
235	276	324	409
203	232	392	513
250	270	300	340
3/8	3/8	3/8	1/2
3/8	3/8	3/8	3/8
3/8	3/8	1/2	1/2
29	37	43	73
0.3	0.8	2	4
L/S			
26	47	110	190
29	50	114	196
36	63	142	244
65	114	252	442
Maximum Temperature			
82°	82°	82°	82°

Model M106-EPDV-A-10506A

Electric/Pneumatically Operated Deluge Valve

ANSI Valve Data (US Units)

Size	DWG	US Units					Metric Units			
Inches	REF	ANSI	3 in	4 in	6 in	8 in	80 mm	100 mm	150 mm	200 mm
Globe Dimensions		<i>All figures shown in mm unless otherwise indicated</i>								
Lay Length	A	150F	12.00	15.00	20.00	25.38	305	381	508	645
Centerline to Bottom	D	150F	3.75	4.60	5.60	7.63	95	117	142	200
Lay Length	A	300F	.25	15.63	21.00	26.38	337	397	533	670
Centerline to Bottom	D	300F	4.13	5.09	6.34	7.88	105	129	161	200
Width	C	-	9.25	10.88	12.75	16.09	235	276	324	409
Height (To Stem Cap)	E	-	8.00	9.15	15.43	20.19	203	232	392	513
Pilot System Clearance	G	-	9.84	10.62	11.81	13.38	250	270	300	340
Body Port Tapping		FNPT	3/8	3/8	3/8	1/2	3/8	3/8	3/8	1/2
Stem Cap Plug		MNPT	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8
Cover Port Tapping		FNPT	3/8	3/8	1/2	1/2	3/8	3/8	1/2	1/2
Valve Stroke			1-1/8	1-7/16	1-11/16	2-7/8	29	37	43	73
Displaced Bonnet Volume (Gallons/Litres)			0.1	0.2	0.50	1.00	0.3	0.8	2	4
Flow Capacities USGPM							L/S			
C _v			110	200	460	800	26	47	110	190
Continuous			460	800	1800	3100	29	50	114	196
Intermittent			575	1000	2250	3875	36	63	142	244
Momentary			1030	1800	4000	7000	65	114	252	442
Maximum Temperature										
Fahrenheit/Celsius			180°	180°	180°	180°	82°	82°	82°	82°

Model M106-PDV-A-10508A

Pneumatically Operated Remote Control Deluge Valve

ANSI Valve Data (US Units)

Size	DWG	US Units					Metric Units			
Inches	REF	ANSI	3 in	4 in	6 in	8 in	80 mm	100 mm	150 mm	200 mm
Globe Dimensions		<i>All figures shown in mm unless otherwise indicated</i>					<i>All figures shown in mm unless otherwise indicated</i>			
Lay Length	A	150F	12.00	15.00	20.00	25.38	305	381	508	645
Centerline to Bottom	D	150F	3.75	4.60	5.60	7.63	95	117	142	200
Lay Length	A	300F	.25	15.63	21.00	26.38	337	397	533	670
Centerline to Bottom	D	300F	4.13	5.09	6.34	7.88	105	129	161	200
Width	C	-	9.25	10.88	12.75	16.09	235	276	324	409
Height (To Stem Cap)	E	-	8.00	9.15	15.43	20.19	203	232	392	513
Pilot System Clearance	G	-	9.84	10.62	11.81	13.38	250	270	300	340
Body Port Tapping		FNPT	3/8	3/8	3/8	1/2	3/8	3/8	3/8	1/2
Stem Cap Plug		MNPT	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8
Cover Port Tapping		FNPT	3/8	3/8	1/2	1/2	3/8	3/8	1/2	1/2
Valve Stroke			1-1/8	1-7/16	1-11/16	2-7/8	29	37	43	73
Displaced Bonnet Volume (Gallons/Litres)			0.1	0.2	0.50	1.00	0.3	0.8	2	4
Flow Capacities USGPM							L/S			
C _v			110	200	460	800	26	47	110	190
Continuous			460	800	1800	3100	29	50	114	196
Intermittent			575	1000	2250	3875	36	63	142	244
Momentary			1030	1800	4000	7000	65	114	252	442
Maximum Temperature										
Fahrenheit/Celsius			180°	180°	180°	180°	82°	82°	82°	82°

Model M106-PG-GE/M206 PG-GE/MS106 PG-GE

Deluge Valve - Grooved Ends

Valve Data (US Units)

Inches	DWG	Standard	Single Rolling Diaphragm System			
	REF	Grooved Ends	3 in	4 in	6 in	8 in
Globe Dimensions			All figures shown in inches unless otherwise stated			
Lay Length	A	-	12.50	15.00	20.00	25.37
Centerline to Bottom	D	-	2.25	2.81	4.00	5.00
Common Dimensions (Globe)						
Width	C	-	9.25	10.88	12.13	17.16
Height (To Stem Cap) Globe	E	-	10.06	11.74	15.01	19.70
Body Port Tapping		FNPT	3/8	3/8	3/8	1/2
Stem Cap Plug		MNPT	3/8	3/8	3/8	3/8
Cover Port Tapping		FNPT	3/8	3/8	3/8	1/2
Valve Stroke			1 1/8	1 7/16	1 11/16	2 7/8
Displaced Bonnet Volume (Gallons)			0.1	0.2	0.6	1.7
Approximate Shipping Weight (Lbs)			80	148	350	590
Flow Capacities (USGPM) Globe						
C_v			110	200	460	800
Continuous (Globe)			460	800	1800	3100
Intermittent (Globe)			575	1000	2250	3875
Momentary (Globe)			1030	1800	4000	7000
Maximum Pressure Ratings (Ductile Only)						
PSIG		Grooved Ends	400	400	400	400
Maximum Temperature						
Fahrenheit			180°	180°	180°	180°

Valve Data (Metric Units)

MM	DWG	Standard	Single Rolling Diaphragm System			
	REF	Grooved Ends	80 mm	100 mm	150 mm	200 mm
Globe Dimensions			All figures shown in millimeters unless otherwise stated			
Lay Length	A	-	318	381	508	645
Centerline to Bottom	D	-	57	71	102	127
Common Dimensions (Globe)						
Width	C	-	235	276	308	436
Height (To Stem Cap) Globe	E	-	256	298	381	500
Body Port Tapping	FNPT	Inches	3/8	3/8	3/8	1/2
Stem Cap Plug	MNPT	Inches	3/8	3/8	3/8	3/8
Cover Port Tapping	FNPT	Inches	3/8	3/8	3/8	1/2
Valve Stroke		mm	29	37	43	73
Displaced Bonnet Volume (Litres)			0.3	0.8	2.1	6.3
Approximate Shipping Weight (Kilograms)			37	67	160	268
Flow Capacities (L/s) Globe						
K_v (Globe)			26	47	110	190
Continuous (Globe)			29	50	114	196
Intermittent (Globe)			36	63	142	244
Momentary (Globe)			65	114	252	442
Maximum Pressure Ratings (Ductile Only)						
Barg		Grooved Ends	27.6	27.6	27.6	27.6
Maximum Temperature						
Celcius			82°	82°	82°	82°



Delivery and Service

The capacity to deliver the widest array of products and stand behind those products to ensure your satisfaction is our strength. The success of Mueller Co. is dependent upon the success of those who are involved, both inside and outside our company. Therefore, we feel our future is wholly dependent on long-term relationships with our employees, customers and suppliers. This is why we strive to be proactive and responsive to their needs, always looking for a “better way”. It’s an approach that has set us apart since 1857 and will assure our mutual achievement and prosperity in the future.

Mueller Co. distributors inventory extensive stocks, helping to assure ready availability. Mueller Co. sales representatives, strategically located around the world, are always ready to provide application and installation assistance and help with any special issues.



● Mueller Sales and Customer Service

▲ Mueller Operations

▲ Affiliate Operations

Follow Us:



For more information about Mueller Co. or to view our full line of water products, please visit www.muellercompany.com or call Mueller Customer Service at 1.800.423.1323.



Mueller Co., LLC
633 Chestnut St., Suite 1200
Chattanooga, TN 37450
www.muellercompany.com
moreinfo@muellercompany.com

Toll Free: 1.800.423.1323
Canada: 1.705.719.9965
International: 1.423.490.9555

Copyright © 2017 Mueller Co., LLC. All Rights Reserved.

The trademarks, logos and service marks displayed in this document herein are the property of Mueller Co., LLC, its affiliates or other third parties. Products above marked with a section symbol (§) are subject to patents or patent applications. For details, visit www.mwppat.com. These products are intended for use in potable water applications. Please contact your Mueller Sales or Customer Service Representative concerning any other application(s).

Form 13858 - Rev 8/17