



VALVE &
HYDRANT


NON-ADJUSTABLE POST INDICATOR

PRODUCT FEATURES

- Available in three lengths with optional extensions.
- Compatible with 4" – 24"/DN100 – DN600 Post Indicator Valves, requiring 14 to 75 turns respectively to open.
- Models: U-20808 4" – 14"/DN100 – DN350 Valves; U-20809 16" – 24"/DN400 – DN600 Valves.
- Open left or right options.
- Withstands up to 900 ft.-lbs. (1220 Nm) of operating torque.
- Lockable Operating Wench storage prevents tampering.
- ½" NPT tapped boss for mounting optional supervisory switch.
- UL listed (4" – 24"/DN100 – DN600); FM approved (4" – 16"/DN100 – DN400).

Extension Section and Stem

Lengths: 1' (300 mm), 1'6" (450 mm), 2' (600 mm), 2'6" (750 mm), 3' (900 mm), 3'6" (1.05 m), 4' (1.20 m), 4'6" (1.35 m), 5' (1.5 m).

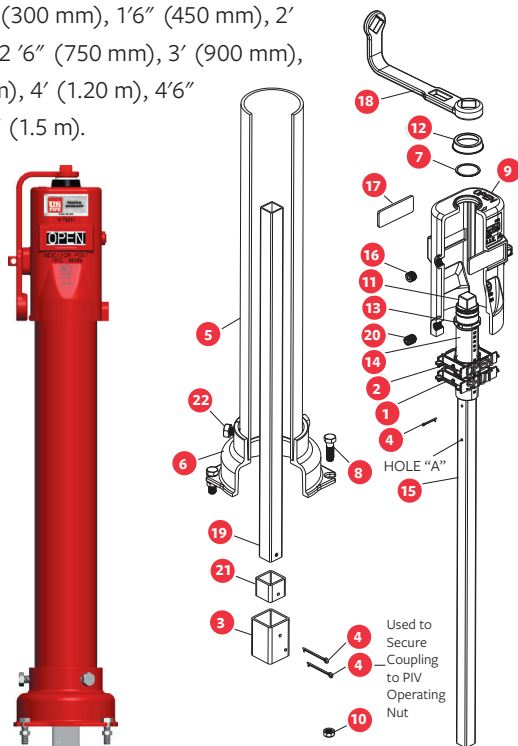


PARTS LIST

ID	PART NAME	MATERIAL
1	SHUT Target	Nylon
2	OPEN Target	Nylon
3	Coupling	Steel ASTM A500 GR.B
4	Cotter Pin (2 long, 1 short)	Brass ASTM B21
5	Barrel	Steel Pipe Schedule 40
6	Bell	Ductile Iron ASTM A536
7	Retaining Ring	Stainless Steel AISI 302
8	Hex Bolt	Steel/Zinc Plated ASTM A307 GR.A
9	Post Head	Cast Iron ASTM A126 CL.B
10	Hex Nut	Steel/Zinc Plated ASTM A563 GR.A
11	Operating Nut	Ductile Iron ASTM A536 GR.65-45-12
12	Cap	Polypropylene
13	Spring Pin	Stainless Steel AISI 420
14	Threaded Sleeve	Nylon
15	Upper Stem	Steel ASTM A513
16	Pipe Plug-Hex Socket	Steel
17	Window	Plexiglass
18	Wrench	Ductile Iron ASTM A536 (See Note 1)
19	Lower Stem	Steel ASTM A500 GR.B
20	Socket Head Set Screw	Steel ANSI B18.3
21	Coupling Insert	Steel ASTM A500 GR.B
22	Hex HD Screw	Steel/Zinc Plated ASTM 307 GR.B

Notes:

1. The Wrench (#18) is made of Ductile Iron on the 4" – 14"/DN100 – DN350 Valves and Steel on the 16" – 24"/DN400 – DN600 Valves.

MUELLER

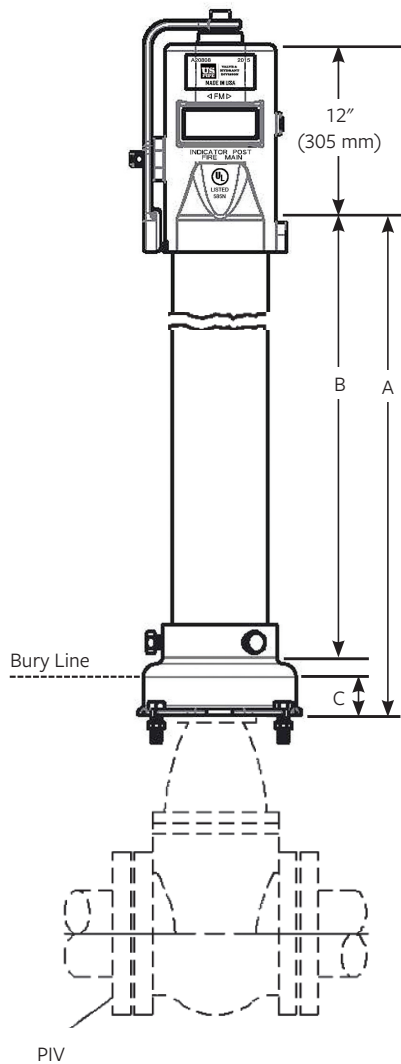

BARREL DIMENSIONS - INCHES (MM)

SIZE NO.	A	B	C
0	26 $\frac{5}{8}$ (676)	24 (610)	2 (51)
1	32 $\frac{5}{8}$ (829)	30 (762)	8 (203)
2	38 $\frac{5}{8}$ (981)	36 (914)	14 (356)

DIMENSIONS - FEET/INCHES (MM), WEIGHT - LB (KG)

VALVE SIZE	SIZE NUMBER		
	0	1	2
4"/DN100	1'3" (381)	1'9" (53)	2'3" (686)
6"/DN150	1'8" (508)	2'2" (660)	2'8" (813)
8"/DN200	2'1" (635)	2'7" (787)	3'1" (941)
10"/DN250	2'5" (737)	3'11" (1194)	4'5" (1348)
12"/DN300	2'9" (838)	3'3" (991)	3'9" (1143)
14"/DN350	3'3" (991)	3'9" (1143)	4'3" (1295)
16"/DN400	3'7" (1092)	4'1" (1245)	4'7" (1397)
18"/DN450	4'2" (1270)	4'8" (1422)	5'2" (1575)
20"/DN500	4'6" (1372)	5'0" (1524)	5'6" (1676)
24"/DN600	5'3" (1600)	5'9" (1753)	6'3" (1905)
Weight - Lb (Kg)	84 (38.2)	92 (41.8)	100 (45.5)

For more information about us, or to view our full line of products, please visit www.mueller-international.com or call International Customer Service at:

UK: +44.1438.487410 Dubai: +971.4.214.6640 Singapore: +65.6816.3088 USA: +1.800.423.1323 | International@muellerwp.com

Mueller refers to one or more of Mueller Water Products, Inc., a Delaware corporation ("MWP"), and its subsidiaries. MWP and each of its subsidiaries are legally separate and independent entities when providing products and services. MWP does not provide products or services to third parties. MWP and each of its subsidiaries are liable only for their own acts and omissions and not those of each other. MWP brands include Mueller®, Echologics®, Hydro Gate®, Hydro-Guard®, Jones®, Krausz®, MiNet®, Milliken®, Pratt®, Pratt Industrial®, Singer®, and U.S. Pipe Valve & Hydrant. Please see muellerwp.com/brands to learn more.

© 2020 Mueller Water Products, Inc. All Rights Reserved. The trademarks, logos and service marks displayed in this document are the property of Mueller Water Products, Inc., its affiliates or other third parties. Products above marked with a section symbol (§) are subject to patents or patent applications. For details visit www.mwppat.com.

F 12902 3/20

MUELLER