


SIZE	A H-785	A H-786	B	C	D	E	F	G	H
14	388.6 15.30	397.5 15.65	571.5 22.50	704.8 27.75	644.7 25.38	14 1.00	495.3 19.50	10 .75	268.2 10.56
16	442 17.40	452.1 17.80	571.5 22.50	726.9 28.62	698.5 27.50	14 1.00	558.8 22.00	12 .75	300 11.81
18	495.3 19.50	506 19.92	571.5 22.50	720.9 28.38	771.7 30.38	14 1.12	616 24.25	12 .75	328.7 12.94
20	548.6 21.60	560.3 22.06	571.5 22.50	720.9 28.38	838.2 33.00	14 1.12	673.1 26.50	14 .75	357.1 14.06
24	655.3 25.80	668.5 26.32	571.5 22.50	739.6 29.12	952.5 37.50	14 1.12	787.4 31.00	16 .75	414.3 16.31

PARTS LIST				
ITEM	DESCRIPTION	REQD	MATERIAL	ASTM
1	CAP W/ DRAIN	1	CAST IRON	A126 CL B
2	CAP	1	CAST IRON	A126 CL B
3	DRAIN PLUG	1	IRON	
4	GASKET	2	RUBBER	
5	SIDE PACKING	2	RUBBER	
6	PIPE GLAND BOLT	6	STEEL	CIII-64 PARA. 6.4
7	BOLT	4	STEEL	A307 GRADE B PLTD
8	SIDE BOLT	4	STEEL	A307 GRADE B PLTD
9	PIPE GLAND	2	CAST IRON	CL B

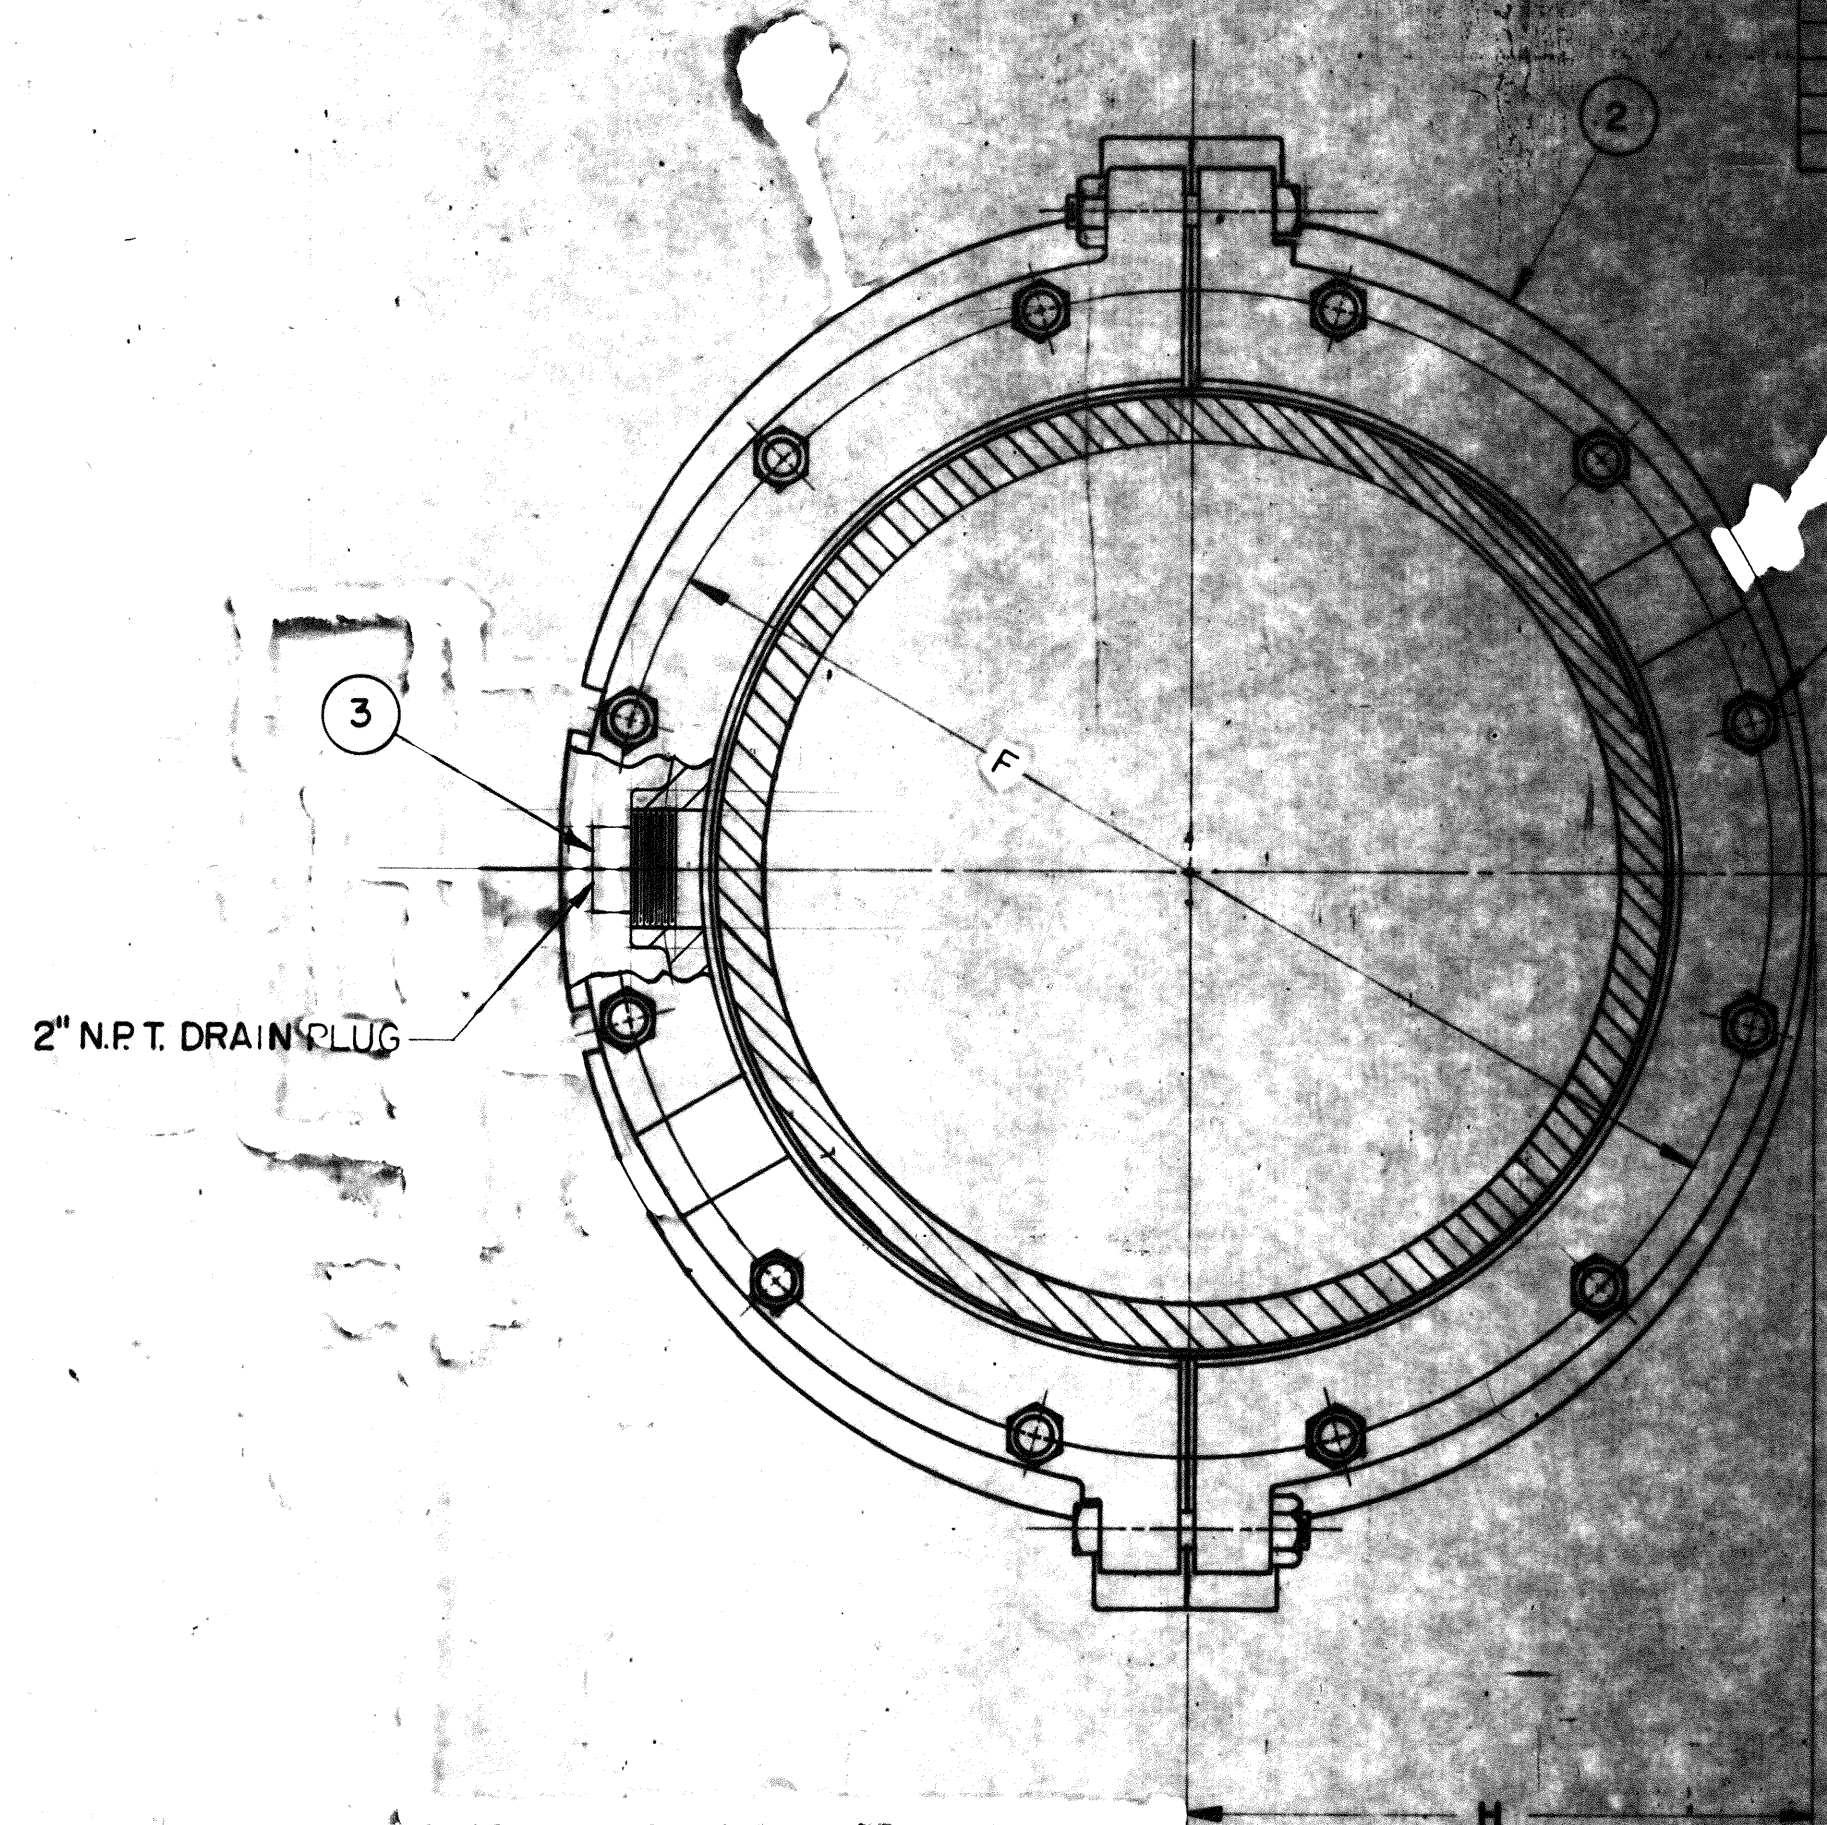

G NO. 8 SIZE OF BOLTS  
(INCLUDES BOLTS - BOTH ENDS)

H-785 WITH DUCK TIPPED GASKET  
FOR CLASS 50-250 - ALL SIZES  
FOR OLD AWWA CLASS A & B &  
AGA PIPE 150W

H-786 WITH PLAIN RUBBER GASKET  
FOR OLD AWWA CLASS C & D PIPE

MUELLER CONFIDENTIAL  
Title to and ownership of this engineering data  
remains in Mueller Co. No use is to be made  
of this data except as specifically authorized  
by Mueller Co. Assent on the part of recipients  
to these conditions is presumed.

DATE	10-10-79	REV. NO.	1	DESIGNED BY	TRJ
BY	J.L.C.	DATE	10-12-79	CHECKED BY	TRJ
BY	R.L.R.	DATE	10-12-79	APPROVED BY	TRJ
BY	TRJ	DATE	10-12-79	REVIEWED BY	TRJ

MUELLER CO. CHATTANOOGA, TENN. REPAIR SLEEVE WITH MECH. JOINT ENDS H-785, H-786 6506