


ITEM	DESCRIPTION	MATERIAL DESCRIPTION
1	BODY	CAST LOW LEAD BRASS ALLOY
2	CAP	CAST BRASS ASTM B62 ALLOY C83600
3	STEM	LOW LEAD BRASS ALLOY
4	BALL	LOW LEAD BRASS ALLOY
5	GASKET	ASTM D2000 (BUNA-N)
6	SPIRODL PIN	AISI 303 STAINLESS STEEL
7	O-RING	ASTM D2000 (EP)
8	O-RING	ASTM D2000 (EP)
9	END PIECE	CAST LOW LEAD BRASS ALLOY
10	SNAP RING	COPPER ALLOY WIRE CDA 521
11	SADDLE NUT	CAST BRASS ASTM B62 ALLOY C83600
12	RUBBER GSKT	ASTM D2000 (SBR)

SIZE	A	B	C	D	E
3/4x5/8R	.62	2.12	.75	3.18	2.87
3/4 R	.62	2.12	.75	3.11	2.87
5/8x3/4x1	.75	2.31	.84	3.44	3.15
3/4	.75	2.31	.84	3.21	3.15
1 R	.75	2.32	.84	3.33	2.32
1	1.00	2.62	1.15	4.17	3.78

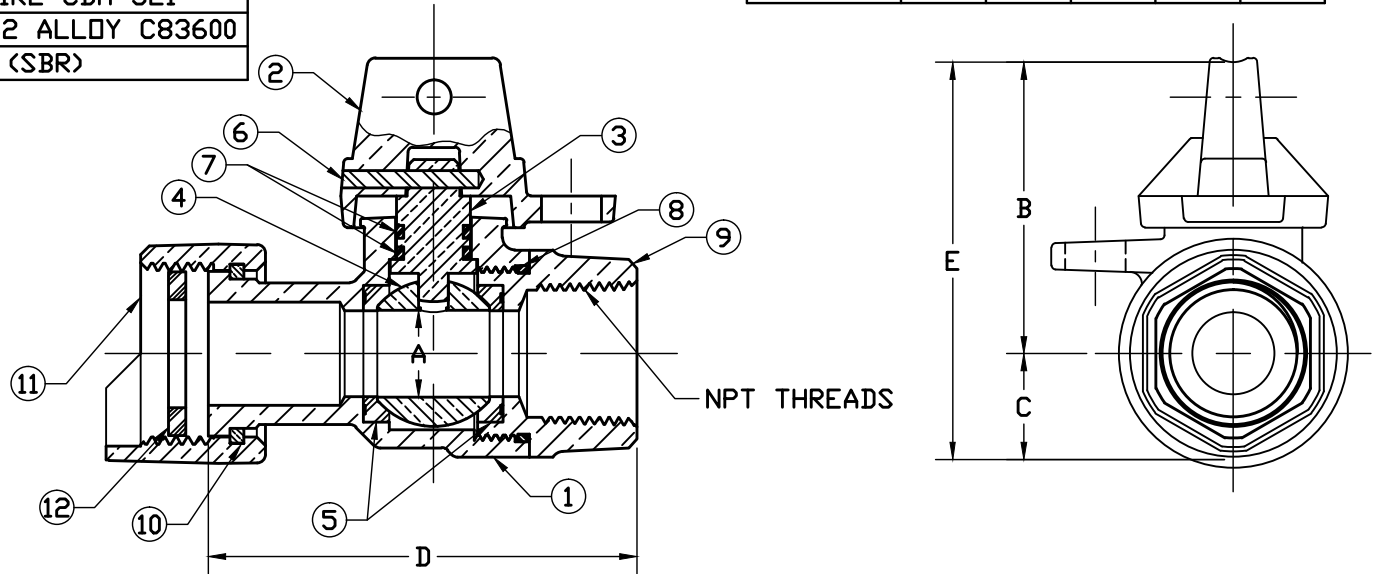

**NOTE: ALL WETTED PARTS ARE LOW LEAD BRASS ALLOY**

FILEPATH: PROD-ENG\MUELLER\ASYSUBMITTALS\B24351N

				DRFTR	JGarvir	8/25/11	<b>Mueller Co.</b>		
				CHKR					
				ENGR					
				MGR					
				BY		DATE	UNLESS OTHERWISE NOTED	THIRD ANGLE PROJECTION	
				STK No:			SURFACE PREPARATION:	REF. No.	SCALE
				MAT'L:			BREAK CORNER(S) ---- .000		
				DESCR.			SURFACE FINISH -- XX RMS	NONE	
				PER EST NO: DXXXX			TOLERANCE(S):		
				EST FIN WT = 0.0000 lbs			LINEAR ----- ± .000		
							ANGULAR ----- ± 0°00'	PART NUMBER	
							B24351N		

PART NUMBER  
B24351N  
442-MRKTG

INLINE BALL METER VALVE  
LOW LEAD BRASS (MTR x FIP)

PART NUMBER  
B24351N