


No.	DESCRIPTION	DESCRIPTION
1	BODY	CAST LOW LEAD BRASS ALLOY
2	KEY	CAST LOW LEAD BRASS ALLOY
3	ORING	EPDM D2000
4	ORING	EP D2000
5	ORING	EPDM D2000
6	RETAINING RING	BERYLLIUM COPPER ASTM B197
7	PJ GASKET	BUNA-N ASTM D2000
8	PJ WASHER	POLYPROPYLENE
9	COMP. RING	BRASS ASTM B505 ALLOY C83600
10	COMP. NUT	CAST BRASS ASTM B62 ALLOY C83600

SIZE	ØA	B	C	D	KEY HEAD
1-1/2"	1.50	6.11	2.32	4.25	.56 x 1.50
2"	1.94	7.06	2.47	4.58	.62 x 1.75

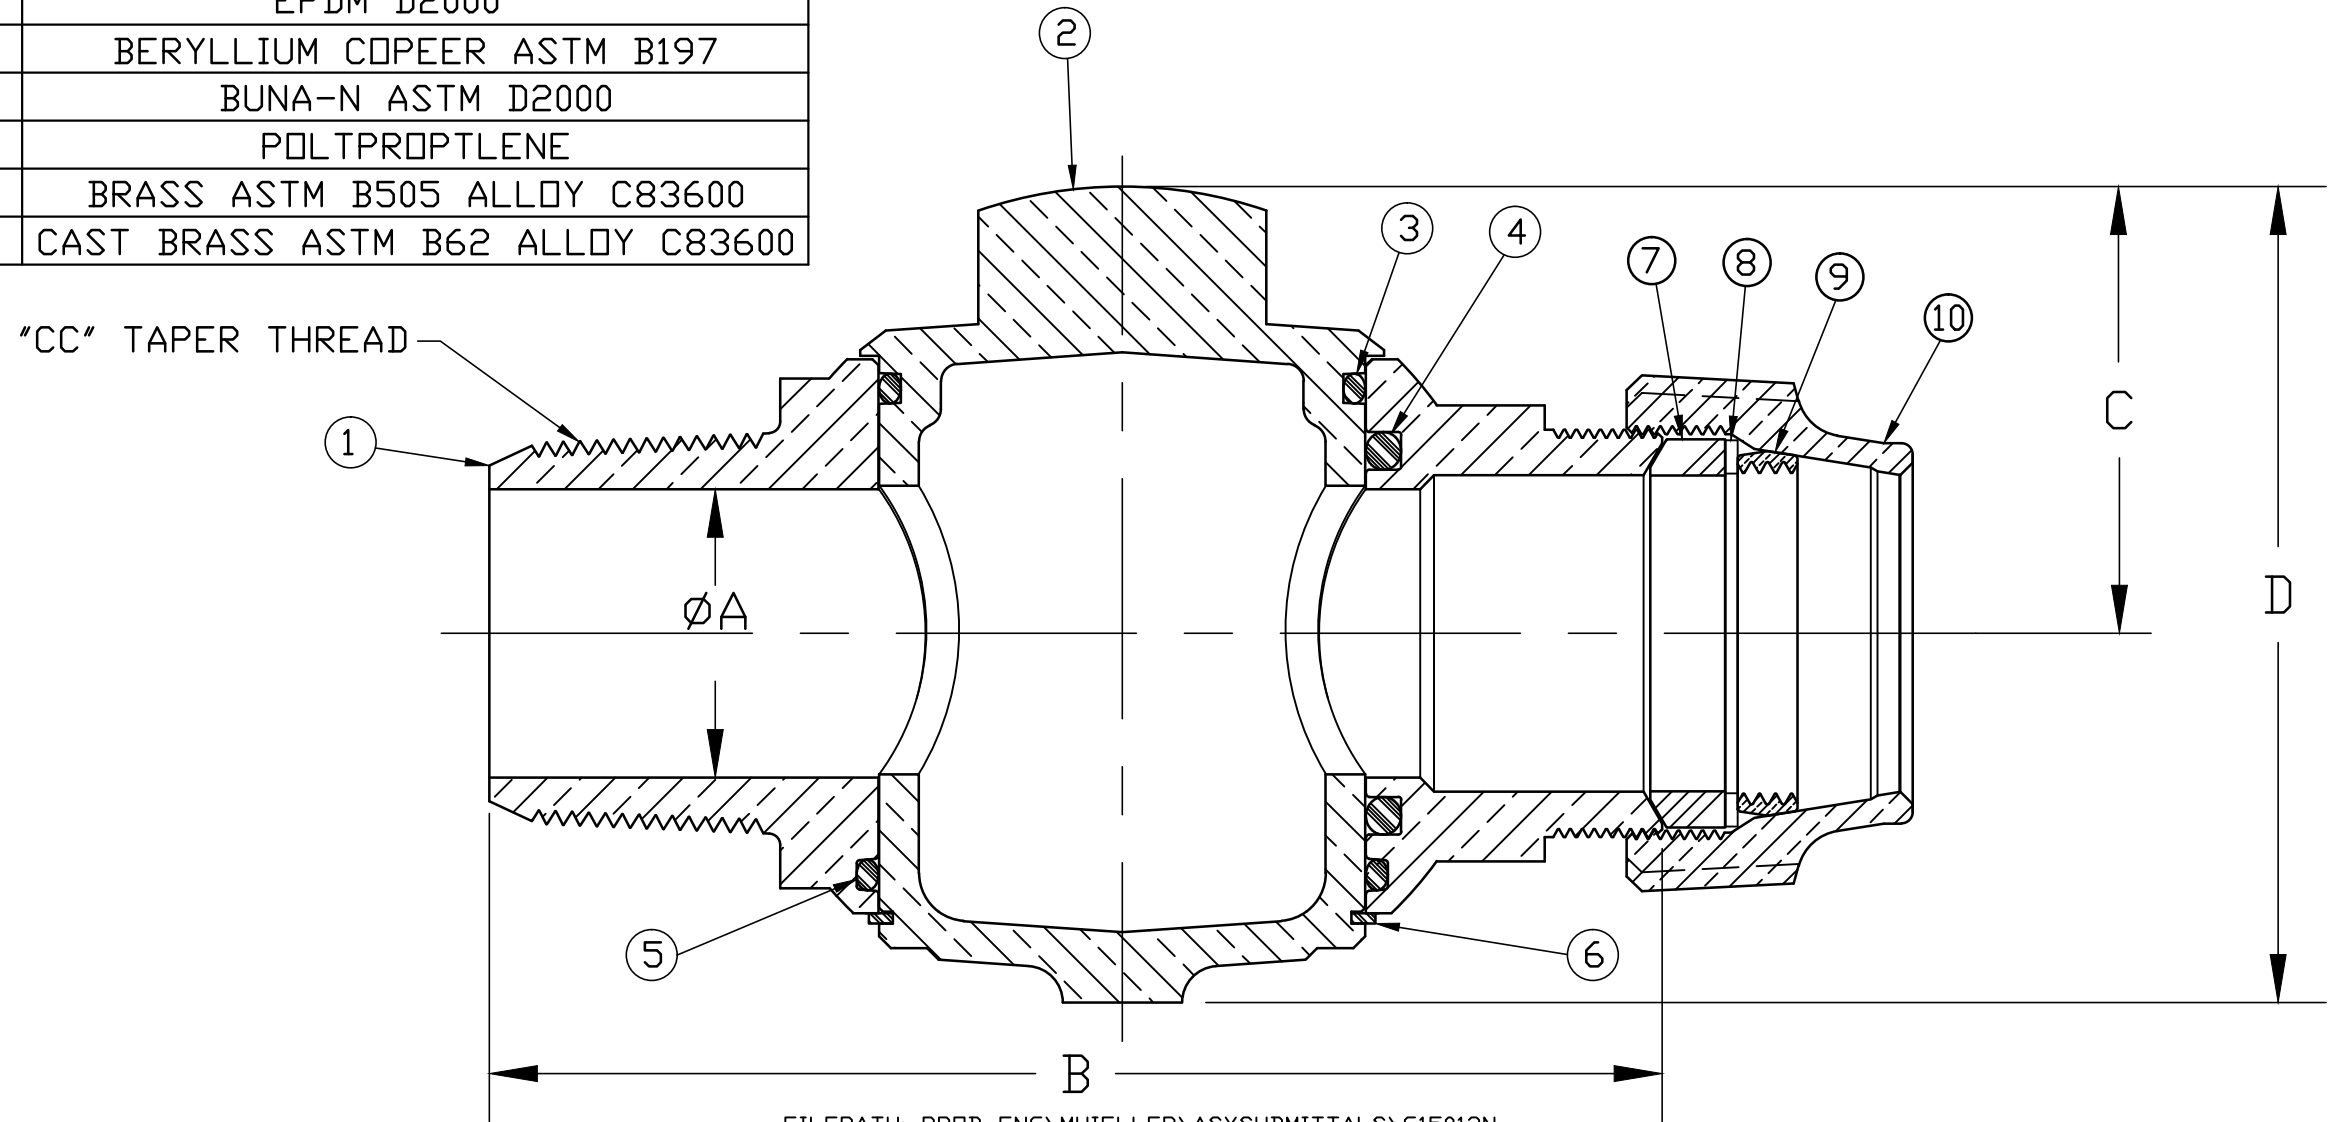

"CC" TAPER THREAD

ALL WETTED PARTS ARE LOW LEAD BRASS ALLOY

FILEPATH: PROD-ENG\MUELLER\ASYSUBMITTALS\G15013N

DWG NUMBER  
G15013N  
442-MRKTG

TITLE TO AND OWNERSHIP OF THIS ENGINEERING DATA REMAINS IN Mueller Co. NO USE IS TO BE MADE OF THIS DATA EXCEPT AS SPECIFICALLY AUTHORIZED BY Mueller Co. ASSENT ON THE PART OF THE RECIPIENT TO THESE CONDITIONS IS PRESUMED

DRFTR	RWB	1/10/17	<b>Mueller Co.</b>		
CHKR					
ENGR					
MGR					
UNLESS OTHERWISE NOTED			THIRD ANGLE PROJECTION		
SURFACE PREPARATION:			REF. No. SCALE		
BREAK CORNER(S) ---- .000					
SURFACE FINISH -- XX RMS			FULL		
TOLERANCE(S):					
LINEAR ----- ± .000					
ANGULAR ----- ± 0°00'					
BY DATE					
STK No:					
MAT'L:					
DESCR.			DWG NUMBER		
ORISEAL LLB CORPORATION VALVE			G15013N		
(CC TAPER x GRIP)					
REV	ECR	DESCRIPTION	DATE	BY	CHKR
PER EST NO: DXXXX EST FIN WT = 0.0000 lbs					