


NO.	DESCRIPTION	MATERIAL
1	1st POPPET FACING	RUBBER ASTM D2000 NATURAL RUBBER
2	1st POPPET	CELCON GRADE M90-04 NATURAL COLOR
3	1st POPPET SPRING	STAINLESS STEEL ASTM A313 TYPE 302
4	2nd POPPET FACING	RUBBER ASTM D2000 NATURAL RUBBER
5	2nd POPPET	CELCON GRADE M90-04 NATURAL COLOR
6	2nd POPPET SPRING	STAINLESS STEEL ASTM A313 TYPE 302
7	ORING	RUBBER ASTM D2000 EPDM
8	ORING	RUBBER ASTM D2000 EPDM
9	CAP	CAST LOW LEAD BRASS ALLOY
10	BODY	CAST LOW LEAD BRASS ALLOY
11	SNAP RING	ASTM B134 CDA 521 BRASS BAR
12	RUBBER GASKET	RUBBER ASTM D2000 NITRILE
13	SADDLE NUT	CAST BRASS ASTM B62 ALLOY C83600

SIZE	A
5/8"x3/4"x3/4"	4.03
1"	4.56

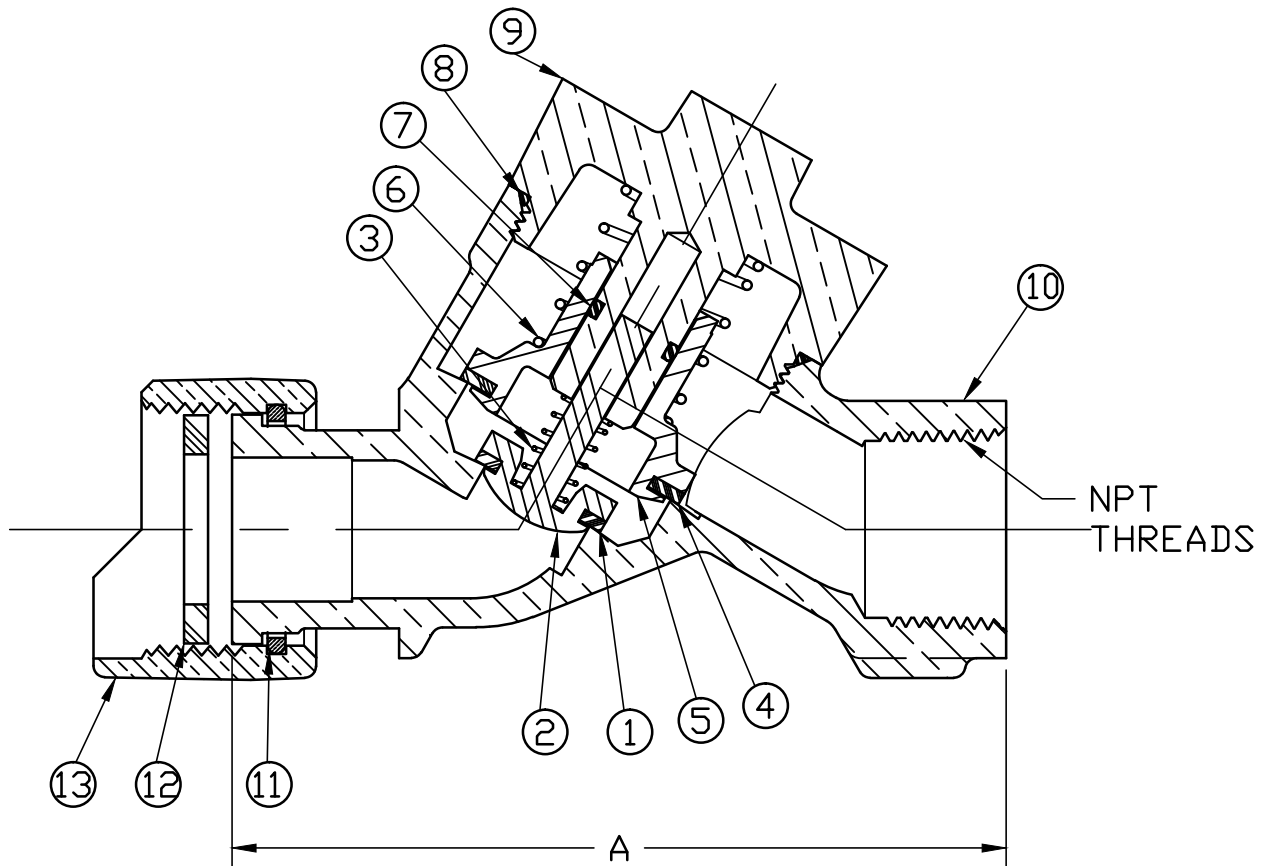

NOTE: ALL WETTED PARTS ARE LOW LEAD BRASS ALLOY

FILEPATH: PROD-ENG\MUELLER\ASYSUBMITTALS\H14242NASSE

DRFTR	JGarvin	5/6/11	Mueller Co.		
CHKR					
ENGR					
MGR					
			UNLESS OTHERWISE NOTED	THIRD ANGLE PROJECTION	
			SURFACE PREPARATION:		
			BREAK CORNER(S) ---- .000		
			SURFACE FINISH -- XX RMS	REF. No.	
			TOLERANCE(S):	SCALE	
			LINEAR ----- ± .000	NONE	
			ANGULAR ----- ± 0°00'		
			STK No:		
			MAT'L:		
			DESCR.	DWG NUMBER	
			INLINE DUAL CHECK VALVE - ASSE	H14242NASSE	
			LOW LEAD BRASS (MTR x FIP)		
REV	ECR	DESCRIPTION	DATE	BY	CHKR
PER EST NO: DXXXX EST FIN WT = 0.0000 lbs					

DWG NUMBER
 H14242NASSE
 442-MRKTNG

TITLE TO AND OWNERSHIP OF THIS ENGINEERING
 DATA REMAINS IN Mueller Co. NO USE IS TO BE
 MADE OF THIS DATA EXCEPT AS SPECIFICALLY
 AUTHORIZED BY Mueller Co. ASSENT ON THE PART
 OF THE RECIPIENT TO THESE CONDITIONS IS PRESUMED