


NO.	DESCRIPTION	MATERIAL
1	1st POPPER FACING	RUBBER ASTM D2000
2	1st POPPET	CELCON GRADE M90-04
3	1st POPPET SPRING	STAINLESS STEEL ASTM A313 TYPE 302
4	2nd POPPER FACING	RUBBER ASTM D2000
5	2nd POPPET	CELCON GRADE M90-04
6	2nd POPPET SPRING	STAINLESS STEEL ASTM A313 TYPE 302
7	ORING	RUBBER ASTM D2000
8	CAP	CAST LOW LEAD BRASS ALLOY
9	BODY	CAST LOW LEAD BRASS ALLOY
10	SNAP RING	BRASS ASTM B134 CDA 521
11	RUBBER GASKET	RUBBER ASTM D2000
12	SADDLE NUT	CAST BRASS ASTM B62 ALLOY C83600

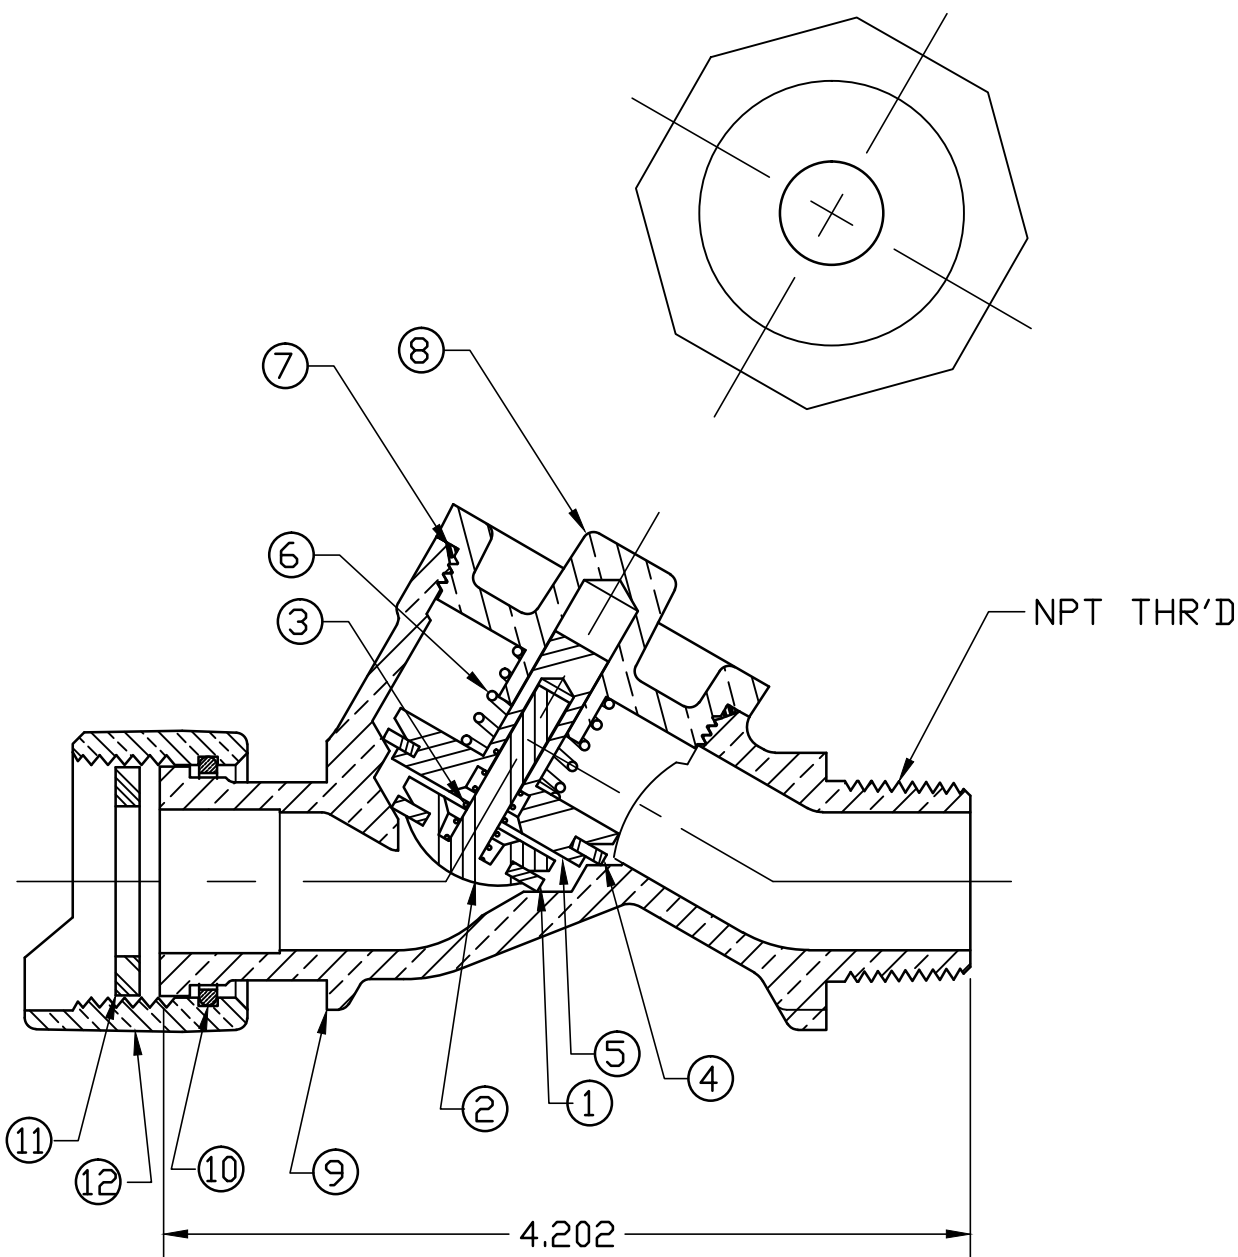

NOTE: ALL WETTED PARTS ARE LOW LEAD BRASS ALLOY

FILEPATH: PROD-ENG\MUELLER\ASYSUBMITTALS\H14272N

						DRFTR	RWB	3/2/11	Mueller Co.	
						CHKR				
						ENGR				
						MGR				
									UNLESS OTHERWISE NOTED	
									SURFACE PREPARATION:	
									BREAK CORNER(S) ---- .000	
									SURFACE FINISH -- XX RMS	
									TOLERANCE(S):	
									LINEAR ----- ± .000	
									ANGULAR ----- ± 0°00'	
						STK No:			THIRD ANGLE PROJECTION	
						MAT'L:			REF. No.	
						DESCR.			SCALE	
						PER EST NO: DXXXX EST FIN WT = 0.0000 lbs			FULL	
						REV ECR DESCRIPTION DATE BY CHKR			DWG NUMBER	
						H14272N			H14272N	

DWG NUMBER
H14272N
442-MRKTG

TITLE TO AND OWNERSHIP OF THIS ENGINEERING
DATA REMAINS IN Mueller Co. NO USE IS TO BE
MADE OF THIS DATA EXCEPT AS SPECIFICALLY
AUTHORIZED BY Mueller Co. ASSENT ON THE PART
OF THE RECIPIENT TO THESE CONDITIONS IS PRESUMED

INLINE DUAL LLB CHECK VALVE
5/8"x3/4"x3/4" (MTR x MIP)