


## A-2362 RESILIENT WEDGE GATE VALVE

### Class 250/300 NRS: 3"/DN80 – 12"/DN300

#### PRODUCT FEATURES


- Non-Rising Stem (NRS).
- 2" square Operating Nut (optional Handwheel).
- All Ductile Iron Body and Bonnet.
- Mueller Pro-Gard® Fusion Bonded Epoxy Coating – 10 mil (250 µ) nominal. Meets requirements of AWWA/ANSI C550.
- Meets requirements of AWWA/ANSI C515 and is certified to ANSI/NSF 61 & 372.
- Antifriction washer above and below thrust collar.
- 316 Stainless Steel, Bonnet and Stuffing Box Bolts and Nuts.
- Ductile Iron Wedge, symmetrical and fully encapsulated with molded rubber; no exposed iron – Acetal Caps on guides ease operation and avoid wear.
- 10-year limited warranty.
- Working Pressure: 350 psig/24 barg; Test Pressure: 700 psig/48 barg.
- UL 262 listed, FM 1120/1130 approved.
- Flange End drilling meets ANSI B16.1, Class 250. Optional PN25 drilling.

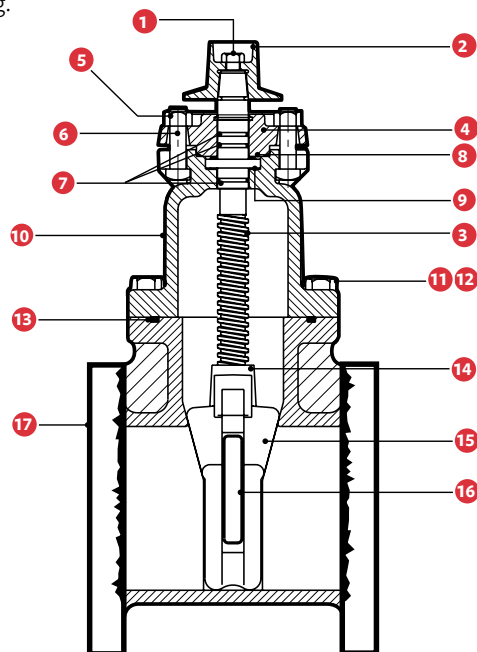

#### PARTS LIST

ID	PART NAME	MATERIAL
1	Cap Screw	316 Stainless Steel ASTM F593
2	Wrench Nut	Ductile Iron ASTM A536
3	Stem	Bronze ASTM B138 Alloy C67600
4	Stuffing Box	Ductile Iron ASTM A536
5	Stuffing Box Bolts	316 Stainless Steel ASTM F593
6	Stuffing Box Nuts	316 Stainless Steel ASTM F594
7	O-Ring	Rubber ASTM D2000
8	O-Ring (Stuffing Box Area)	Rubber ASTM D2000
9	Anti-Friction Washer	Acetal
10	Bonnet	Ductile Iron ASTM 536
11	Bonnet Bolts	316 Stainless Steel ASTM F593
12	Bonnet Nuts	316 Stainless Steel ASTM F594
13	Bonnet O-Ring	Rubber ASTM D2000
14	Stem Nut	Bronze ASTM B584 Alloy C89833
15	Wedge	Rubber Encapsulation Ductile Iron ASTM A536 SBR ASTM D2000
16	Guide Cap Bearings	Acetal
17	Body-Flange Ends	Ductile Iron ASTM 536



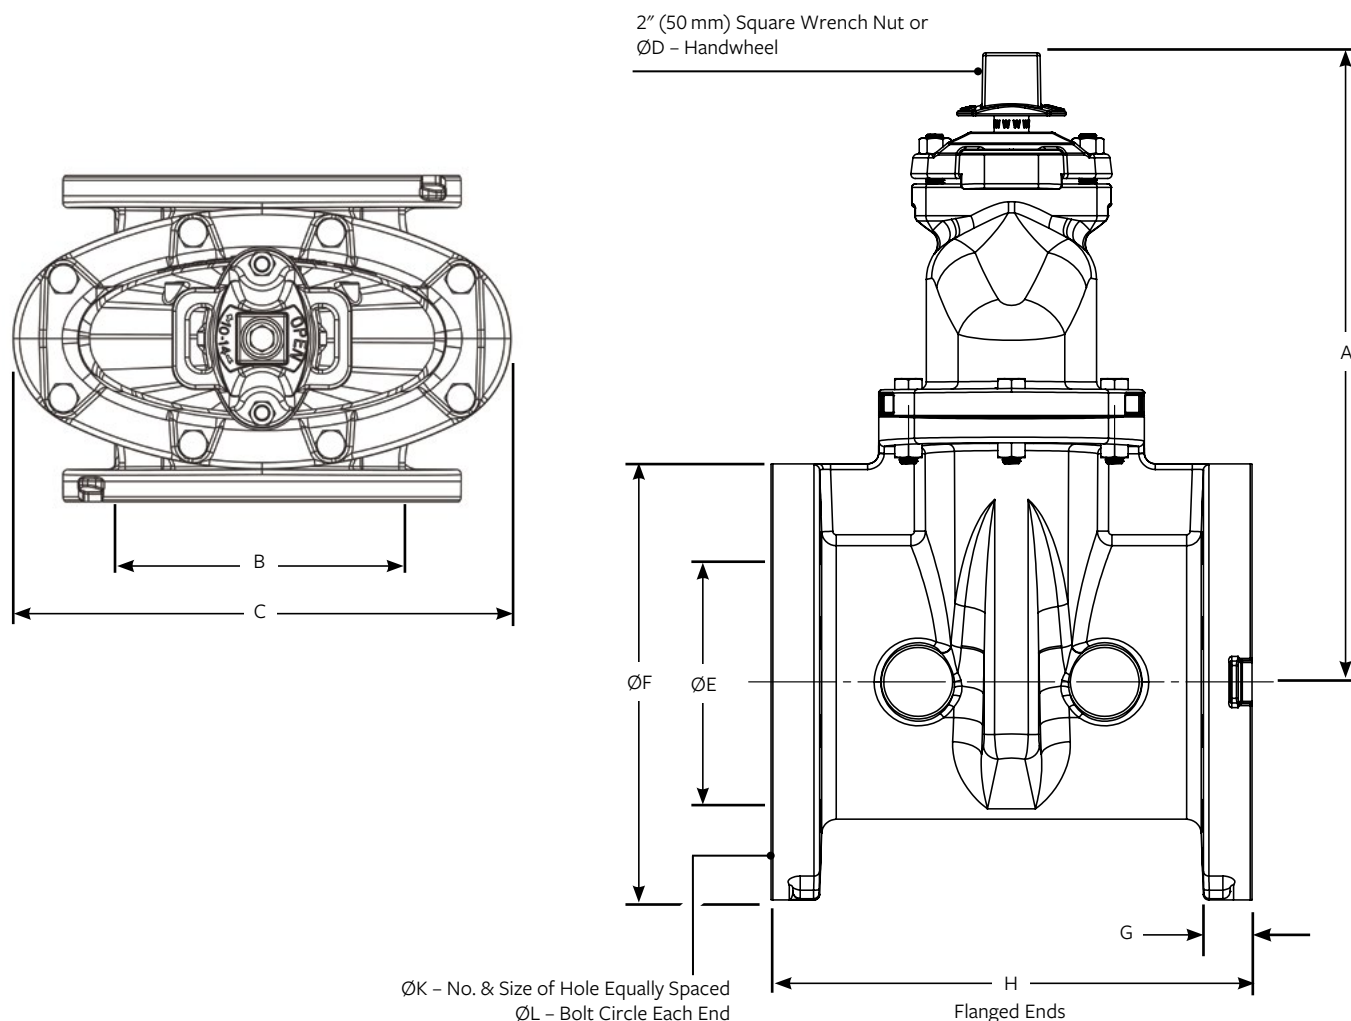

## DIMENSION - INCHES (MM)

VALVE SIZE	A	B	C	ØD	ØE	ØF	G	H	NO. - ØK	ØL
3"/DN80	12.38 (314)	6.02 (153)	8.63 (219)	8.00 (203)	3.30 (84)	9.00 (229)	1.13 (29)	11.10 (282)	8 - 0.88 (22)	6.63 (168)
4"/DN100	14.19 (360)	8.25 (210)	10.79 (274)	11.00 (279)	4.30 (109)	10.00 (254)	1.25 (32)	12.00 (305)	8 - 0.88 (22)	7.87 (200)
6"/DN150	18.00 (457)	10.50 (267)	13.50 (343)	13.00 (330)	6.30 (160)	12.50 (318)	1.44 (37)	15.86 (403)	12 - 0.88 (22)	10.63 (270)
8"/DN200	21.50 (546)	13.21 (336)	16.36 (416)	14.00 (356)	8.30 (211)	15.00 (381)	1.63 (41)	16.50 (419)	12 - 1.13 (29)	13.00 (330)
10"/DN250	25.50 (648)	16.48 (419)	19.99 (508)	16.00 (406)	10.30 (262)	17.50 (445)	1.87 (47)	18.00 (457)	16 - 1.25 (32)	15.24 (387)
12"/DN300	28.62 (727)	16.83 (427)	21.00 (533)	16.00 (406)	12.30 (312)	20.50 (521)	2.00 (51)	19.75 (502)	16 - 1.25 (32)	17.76 (451)

Valve Size	3"/DN80	4"/DN100	6"/DN150	8"/DN200	10"/DN250	12"/DN300
Wt-lb (kg)*	85 (39)	121 (55)	202 (92)	328 (149)	519 (235)	674 (306)
No. of Turns	11	14	20.5	26.5	33	38.5

\*Flanged

For more information about us or to view our full line of products, please visit [www.mueller-international.com](http://www.mueller-international.com) or call International Customer Service at:

UK: +44.1438.487410 Dubai: +971.4.214.6640 Singapore: +65.6816.3088 USA: +1.800.423.1323 | [international@muellerwp.com](mailto:international@muellerwp.com)

Mueller refers to one or more of Mueller Water Products, Inc. a Delaware corporation ("MWP"), and its subsidiaries. MWP and each of its subsidiaries are legally separate and independent entities when providing products and services. MWP does not provide products or services to third parties. MWP and each of its subsidiaries are liable only for their own acts and omissions and not those of each other. MWP brands include Mueller®, Echologics®, Hydro Gate®, Hydro-Guard®, Jones®, Krausz®, MiNet®, Milliken®, Pratt®, Pratt Industrial®, Singer®, and U.S. Pipe Valve & Hydrant. Please see [muellerwp.com/brands](http://muellerwp.com/brands) to learn more.

© 2020 Mueller Water Products, Inc. All Rights Reserved. The trademarks, logos and service marks displayed in this document are the property of Mueller Water Products, Inc., its affiliates or other third parties. Products above marked with a section symbol (§) are subject to patents or patent applications. For details visit [www.mwppat.com](http://www.mwppat.com).

F 14029 3/20

**MUELLER**