

# **A-2361 RESILIENT WEDGE GATE VALVE**

NRS: 14" - 24"/DN350 - DN600

### **PRODUCT FEATURES**

- Non-Rising Stem (NRS).
- Meets requirements of AWWA C515 and is certified to ANSI/NSF 61 & 372.
- 2" square Operating Nut (optional Handwheel).
- 14" 24"/DN350 DN600. Larger Valves through 54"/DN1350 also available.
- All Ductile Iron Body and Bonnet.
- Fusion Bonded Mueller Pro-Gard® Epoxy Coating – 10 mil (250μ) nominal, meets requirements of AWWA C550.
- Manganese Bronze Stem.
- Antifriction washer above and below thrust collar.
- 2 4 5 6 7 10 11 12 13

- Iron Wedge, symmetrical and fully encapsulated with molded rubber; no exposed iron – acetal Caps on guides ease operation and avoid wear.
- 10-year limited warranty.
- UL 262 listed, FM 1120/1130 approved.
- Pressure rating: 14" & 16"/DN350 & DN400 AWWA/UL/FM rating 250 psig/17 barg; 18" 24"/DN450 DN600 AWWA rating 250 psig/17 barg, UL rating 175 psig/12 barg, FM approved 250 psig/17 barg.
- Flange End drilling meets: ANSI B16.1 Class 125 Flat Face and ANSI B16.42 Class 150 Flat Face (PN16 available in sizes 14" & 16"/DN350 & DN400 only).



### **PARTS LIST**

ID	PART NAME	MATERIAL					
1	Wrench Nut	Cast Iron* ASTM A126 CL.B					
2	Wrench Nut Cap Screw	316 Stainless Steel					
3	Stem O-Rings Nitrile ASTM D2000 (See Note 1)						
4	Stuffing Box Ductile Iron ASTM A536**						
5	Stuffing Bolts	316 Stainless Steel					
	Stuffing Nuts	Carbon Steel ASTM A563					
6	Stuffing Box O-Ring	Nitrile ASTM D2000 (See Note 1)					
7	Anti Friction Washers	Brass					
8	Stem	Bronze 14" & 16"/DN350 & DN400 ASTM B138 (C67600) 18" - 24"/DN450 -DN600 ASTM B584 (C86400)					
9	Bonnet	Ductile Iron ASTM A536**					
10	Bonnet Bolts	316 Stainless Steel					
10	Bonnet Nuts	316 Stainless Steel					
11	Bonnet O-Ring Nitrile ASTM D2000 (See Note 1)						
12	Stem Nut Bronze ASTM B62						
13	Body	Ductile Iron ASTM A536**					
14	Wedge	Ductile Iron ASTM A536** (See Note 2)					
15	Guide Cap Bearings	Acetal					
16	Hand Wheel (Not Shown)	Cast Iron* ASTM A126 CL.B					


<sup>\*</sup>Manufacturers option to change to Ductile Iron ASTM A536.

#### NOTES:

1. 14" & 16"/DN350 & DN400 are Nitrile; 18" - 24"/DN450 - DN600 are EPDM.

2. Fully encapsulated in molded rubber with no iron exposed. 14" & 16"/DN350 & DN400 are SBR; 18" – 24"/DN450 – DN600 are EPDM.

<sup>\*\*</sup>ASTM A536 Ductile Iron Grade 65-45-12 (minimum strength).

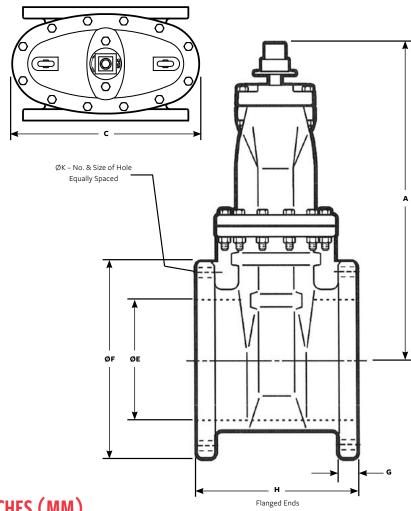

## **DIMENSIONS - INCHES (MM)**

VALVE SIZE	Α	С	ØE	ØF	G	Н	NO ØK
14"/DN350	32.75 (832)	24.92 (633)	14.38 (365)	21.00 (533)	1.42 (36)	15.06 (383)	12 - 1.12 (28)
16"/DN400	37.88 (962)	26.58 (675)	16.00 (400)	23.50 (597)	1.05 (27)	16.06 (408)	16 - 1.12 (28)
18"/DN450	44.19 (1122)	30.50 (775)	18.38 (467)	25.00 (635)	1.05 (27)	17.00 (432)	16 - 1.25 (32)
20"/DN500	48.25 (1225)	33.75 (857)	20.38 (518)	27.50 (698)	1.78 (45)	18.00 (450)	20 - 1.25 (32)
24"/DN600	53.88 (1369)	39.50 (1003)	24.38 (619)	32.00 (800)	1.25 (32)	20.00 (500)	20 - 1.38 (35)

## WEIGHT - LB (KG)

Valve Size	14"/DN350	16"/DN400	18"/DN450	20"/DN500	24"/DN600
Flanged	659 (299)	841 (381)	1298 (589)	1640 (744)	2488 (1129)
MJ*	50 (295)	931 (422)	1298 (589)	1640 (744)	2423 (1099)

For more information about us or to view our full line of products, please visit www.mueller-international.com or call International Customer Service at: UK: +44.1438.487410 Dubai: +971.4.214.6640 Singapore: +65.6816.3088 USA: +1.800.423.1323 international@muellerwp.com

Mueller refers to one or more of Mueller Water Products, Inc. a Delaware corporation ("MWP"), and its subsidiaries. MWP and each of its subsidiaries are legally separate and independent entities when providing products and services. MWP does not provide products or services to third parties. MWP and each of its subsidiaries are liable only for their own acts and omissions and not those of each other. MWP brands include Mueller", Echologics", Hydro-Gate", Hydro-Guard", Jones", Krausz", MiNet", Milliken", Pratt", Pratt Industrial", Singer", and U.S. Pipe Valve & Hydrant. Please see muellerwp.com/brands to learn more.

© 2020 Mueller Water Products, Inc., All Rights Reserved. The trademarks, logos and service marks displayed in this document are the property of Mueller Water Products, Inc., its affiliates or other third parties. Products above marked with a section symbol (§) are subject to patents or patent applications. For details visit www.mwppat.com.

