


No.	QTY.	DESCRIPTION	MATERIAL
1	1	STEM	LEAD FREE BRASS ALLOY ASTM B584/B371
2	2	O-RING	EPDM D2000
3	1	BALL	LEAD FREE BRASS ALLOY ASTM B584
4	1	GASKET - SEAL	EPDM D2000
5	1	BODY	LEAD FREE BRASS ALLOY ASTM B584
6	1	CAP	CAST BRASS ALLOY ASTM B584
7	1	SEALING PLUG	LEAD FREE BRASS ALLOY ASTM B584
8	1	SCREW	410 STAINLESS STEEL
9	1	O-RING	EPDM D2000
10	1	PJ GASKET	EPDM D2000
11	1	PJ WASHER	POLYPROPYLENE
12	1	CLPG NUT SUB	CAST BRASS ALLOY ASTM B584

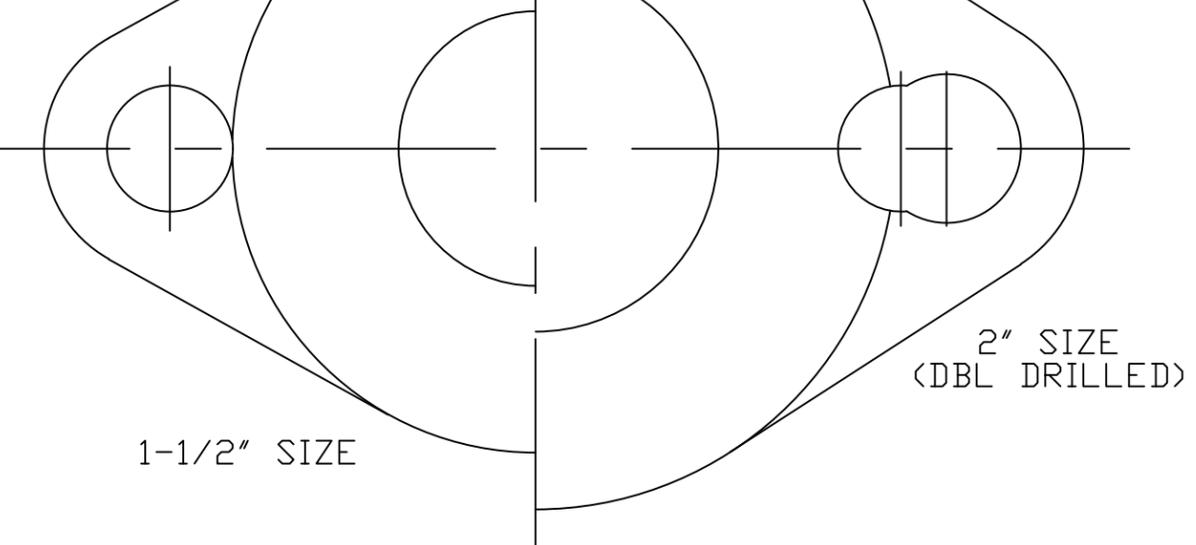

MEETS ALL REQUIREMENTS OF AWWA C800
 ALL STEMS ARE LEAD FREE BRASS ALLOY C89833/C69300
 ALL WETTED PARTS ARE LEAD FREE BRASS ALLOY C89833/C87850
 ALL NON WETTED PARTS ARE BRASS ALLOY C83600/C87850

NSF61 CERTIFIED
 300PSIG MAX WORKING PRESSURE

DRFTR	JGarvin	2/12/08	MUELLER	THIRD ANGLE PROJECTION
CHKR				
ENGR				
MGR				
UNLESS OTHERWISE NOTED			REF. No.	SCALE
SURFACE PREPARATION:				
BREAK CORNER(S) ---- .000				
SURFACE FINISH -- XX RMS			NONE	
TOLERANCE(S):				
LINEAR ----- ± .000				
ANGULAR ----- ± 0°00'				

SIZE	ØA	B	C	D	E
1-1/2	1.50	1.81	3.00	3.53	6.53
2	2.00	2.19	3.78	4.22	8.00

STK No:	MAT'L:	ANGLE METER BALL VALVE (PJ CTS x METER)	DWG NUMBER P24276N
BY	DATE		

DWG NUMBER
P24276N