

LVC FIGURE 53 DUCTILE IRON RESILIENT SEATED

Knife Gate Valve

FEATURES

- Heavy duty cast ductile iron body, packing gland, and yoke for the most rugged service.
- Through bolting on side flange bolts allows easy installation.
- Easily replaceable natural rubber seat provides bidirectional drip tight seal across the gate from o to 150PSI.
 Also available in EPDM and Buna. See reverse side for temperature limits.
- Seat is flush with the bottom of the port eliminating pockets in the bottom of the valve that may collect material in media such as slurries, pellets or powders.
- Rubber seat has a molded-in steel reinforcement and is bolted in place to prevent shifting out of position by gate movement.
- Machined stainless steel gate provides corrosion resistance and durability.
- Easy conversion from handwheel operator to hydraulic or pneumatic cylinder, bevel gear, chain wheel, electric motor, or fail safe spring cylinder operator using existing cast yoke.
- Enclosed bronze stem nut provides reduced operating torque and is protected from harsh environments.
- Stainless steel stem resists corrosion.
- Full packing seal around gate minimizes the potential for packing leakage.
- MSS SP-81 and AWWA C520 face-to-face and flange dimensions.
- Minimum 4 bolt packing gland to ensure proper gland alignment in all valve sizes.
- Entire valve (inside and outside) is epoxy powder coated to provide corrosion resistance.
- CRN Registered






MATERIALS OF CONSTRUCTION

1	Gate	SS
2	Body	DI
3	Seat	Natural Rubber*
4	Bolts	Stainless
5	Packing	TLSP**
6	Gland	DI
7	Stem	SS
8	Yoke	DI
9	Stem Nut	Bronze
10	Handwheel	DI

*MATERIAL	TEMP. LIMITS °F (°C)					
Nat. Rubber	-60 (-51) to 210 (99)					
EPDM(P)	-65 (-54) to 300 (149)					
Buna	-35 (-37) to 250 (121)					

**TLSP = TFE Lubricated Synthetic Packing.

Normally supplied with handwheel for manual operation, but can be modified for chain wheel, bevel gear, fail safe spring cylinder, electric motor, hydraulic or pneumatic cylinder operator.

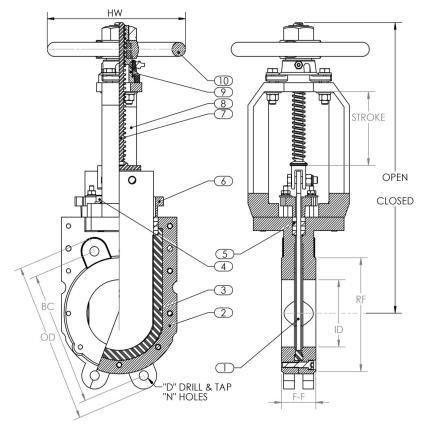

DIMENSIONS (INCHES) AND WEIGHTS

	SIZE	2	3	4	6	8	10	12	14	16	18	20	24
Face-to-Face	F-F	1%	2	2	21/4	23/4	23/4	3	3	3½	3½	4½	4½
Flange OD	OD	6	7½	9	11	13½	16	19	21	23½	25	27½	32
Bolt Circle	BC	43/4	6	7½	9½	113/4	141/4	17	18¾	211/4	223/4	25	29½
Flanged Raised Face	RF	41/8	5	63/16	8½	105/8	12¾	15	17	18½	21	23	271/4
Inside Diameter	ID	2	31/8	4	6	8	10	12	13¾	15¾	17¾	1911/16	235/8
No. of Bolt Holes	N	4	4	8	8	8	12	12	12	16	16	20	20
Hole D&T Size	D	5/8"-11	5/8″-11	5/8"-11	3/4"-10	3/4"-10	7 ₈ "-9	7 ₈ "-9	1″-8	1″-8	11/8"-7	11/8"-7	11/4"-7
C/L to Top-Closed	H-CLS	13	14¾	16%	20½	241/4	29	345/8"	39	43	47½	51%	60
C/L to Top-Open	H-OPN	15	17¾	20%16	26½	32½	391/4	47	541/4	59	65½	71 ¹³ / ₁₆	83%
Handwheel Dia.	H/W	8	8	8	12	12	16	20	24	24	24	24	24
Weight - Ibs	WT	24	34	40	84	116	170	258	308	418	516	702	932
Stroke	S	2	3	4	6	81/4	101/4	123/8	141/4	16	18	1915/16	23%

For more information about us, or to view our full line of products, please visit www.mueller-international.com or call International Customer Service at:

UK: +44.1438.487410 Dubai: +971.4.214.6640 Singapore: +65.6816.3088 USA: +1.800.423.1323 International@muellerwp.com

Mueller refers to one or more of Mueller Water Products, Inc., a Delaware corporation ("MWP"), and its subsidiaries. MWP and each of its subsidiaries are legally separate and independent entities when providing products and services. MWP does not provide products or services to third parties. MWP and each of its subsidiaries are liable only for their own acts and omissions and not those of each other. MWP brands include Mueller®, Echologics®, Hydro Gate®, Hydro-Guard®, Jones®, Krausz®, Mi.Net®, Milliken®, Pratt®, Pratt industrial®, Singer®, and U.S. Pipe Valve & Hydrant. Please see muellerwp.com/brands to learn more.

© 2020 Mueller Water Products, Inc., IR. All Rights Reserved. The trademarks, logos and service marks displayed in this document are the property of Mueller Water Products, Inc., its affiliates or other third parties. Products above marked with a section symbol (§) are subject to patents or patent applications. For details visit www.mwppat.com.

