


NO.	DESCRIPTION	MATERIAL
1	1st POPPET FACING	EPDM D2000
2	1st POPPET	CELCON GRADE M90-04 NATURAL COLOR
3	1st POPPET SPRING	STAINLESS STEEL ASTM A313 TYPE 302
4	2nd POPPET FACING	EPDM D2000
5	2nd POPPET	CELCON GRADE M90-04 NATURAL COLOR
6	2nd POPPET SPRING	STAINLESS STEEL ASTM A313 TYPE 302
7	ORING	EPDM D2000
8	CAP	LEAD FREE BRASS ALLOY ASTM B584
9	BODY	LEAD FREE BRASS ALLOY ASTM B584

SIZE	A
3/4" x 1"	4.41
1"	4.91

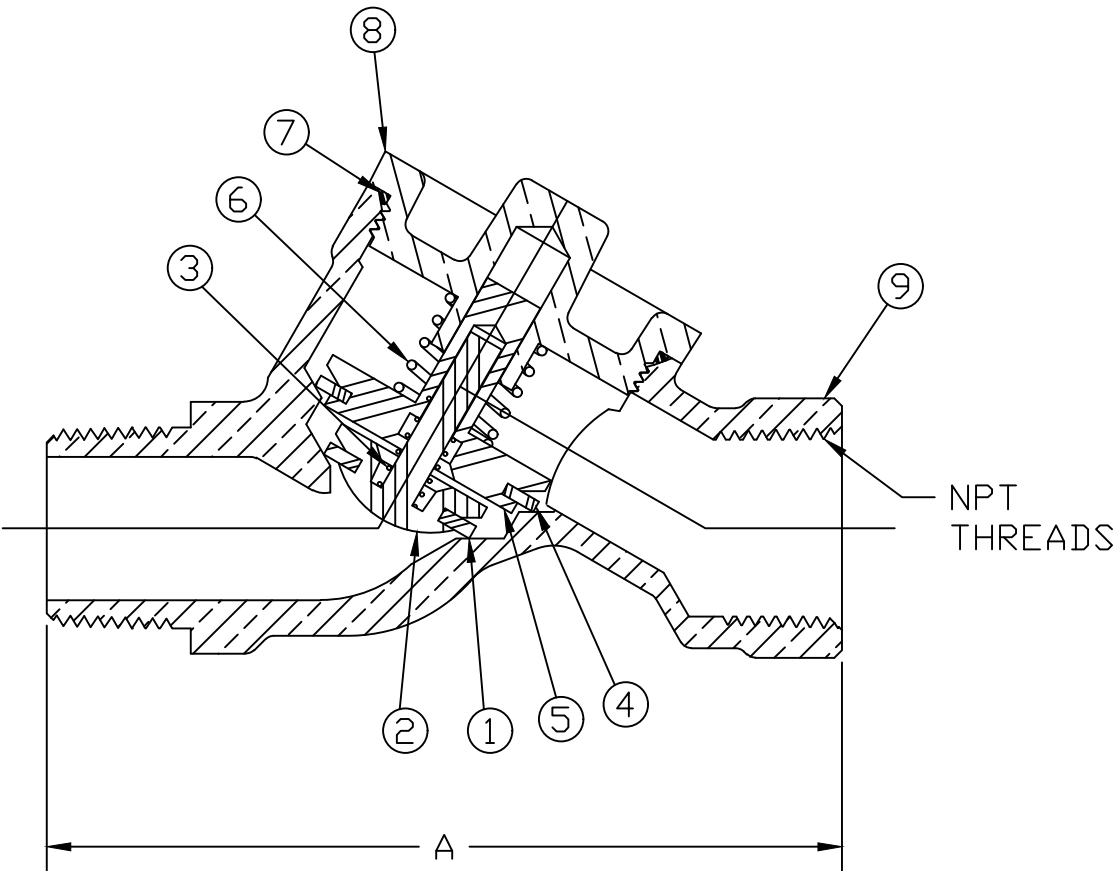

MEETS ALL REQUIREMENTS OF AWWA C800
ALL WETTED PARTS ARE LEAD FREE BRASS ALLOY C89833/C87850
ALL NON WETTED PARTS ARE BRASS ALLOY C83600/C87850

DRFTR	RWB	6/20/13	MUELLER	
CHKR				
ENGR			UNLESS OTHERWISE NOTED SURFACE PREPARATION: BREAK CORNER(S) ---- .000 SURFACE FINISH -- XX RMS TOLERANCE(S): LINEAR ----- ± .000 ANGULAR ----- ± 0°00'	THIRD ANGLE PROJECTION
MGR				REF. No.
	BY	DATE		SCALE NONE
STK No:				
MAT'L:				
DESCR.			INLINE DUAL CHECK VALVE (MIP x FIP)	
			DWG NUMBER H14241N	

DWG NUMBER
H14241N

TITLE TO AND OWNERSHIP OF THIS ENGINEERING
DATA REMAINS IN Mueller Co. NO USE IS TO BE
MADE OF THIS DATA EXCEPT AS SPECIFICALLY
AUTHORIZED BY Mueller Co. ASSENT ON THE PART
OF THE RECIPIENT TO THESE CONDITIONS IS PRESUMED