



DWG NUMBER
P24276N

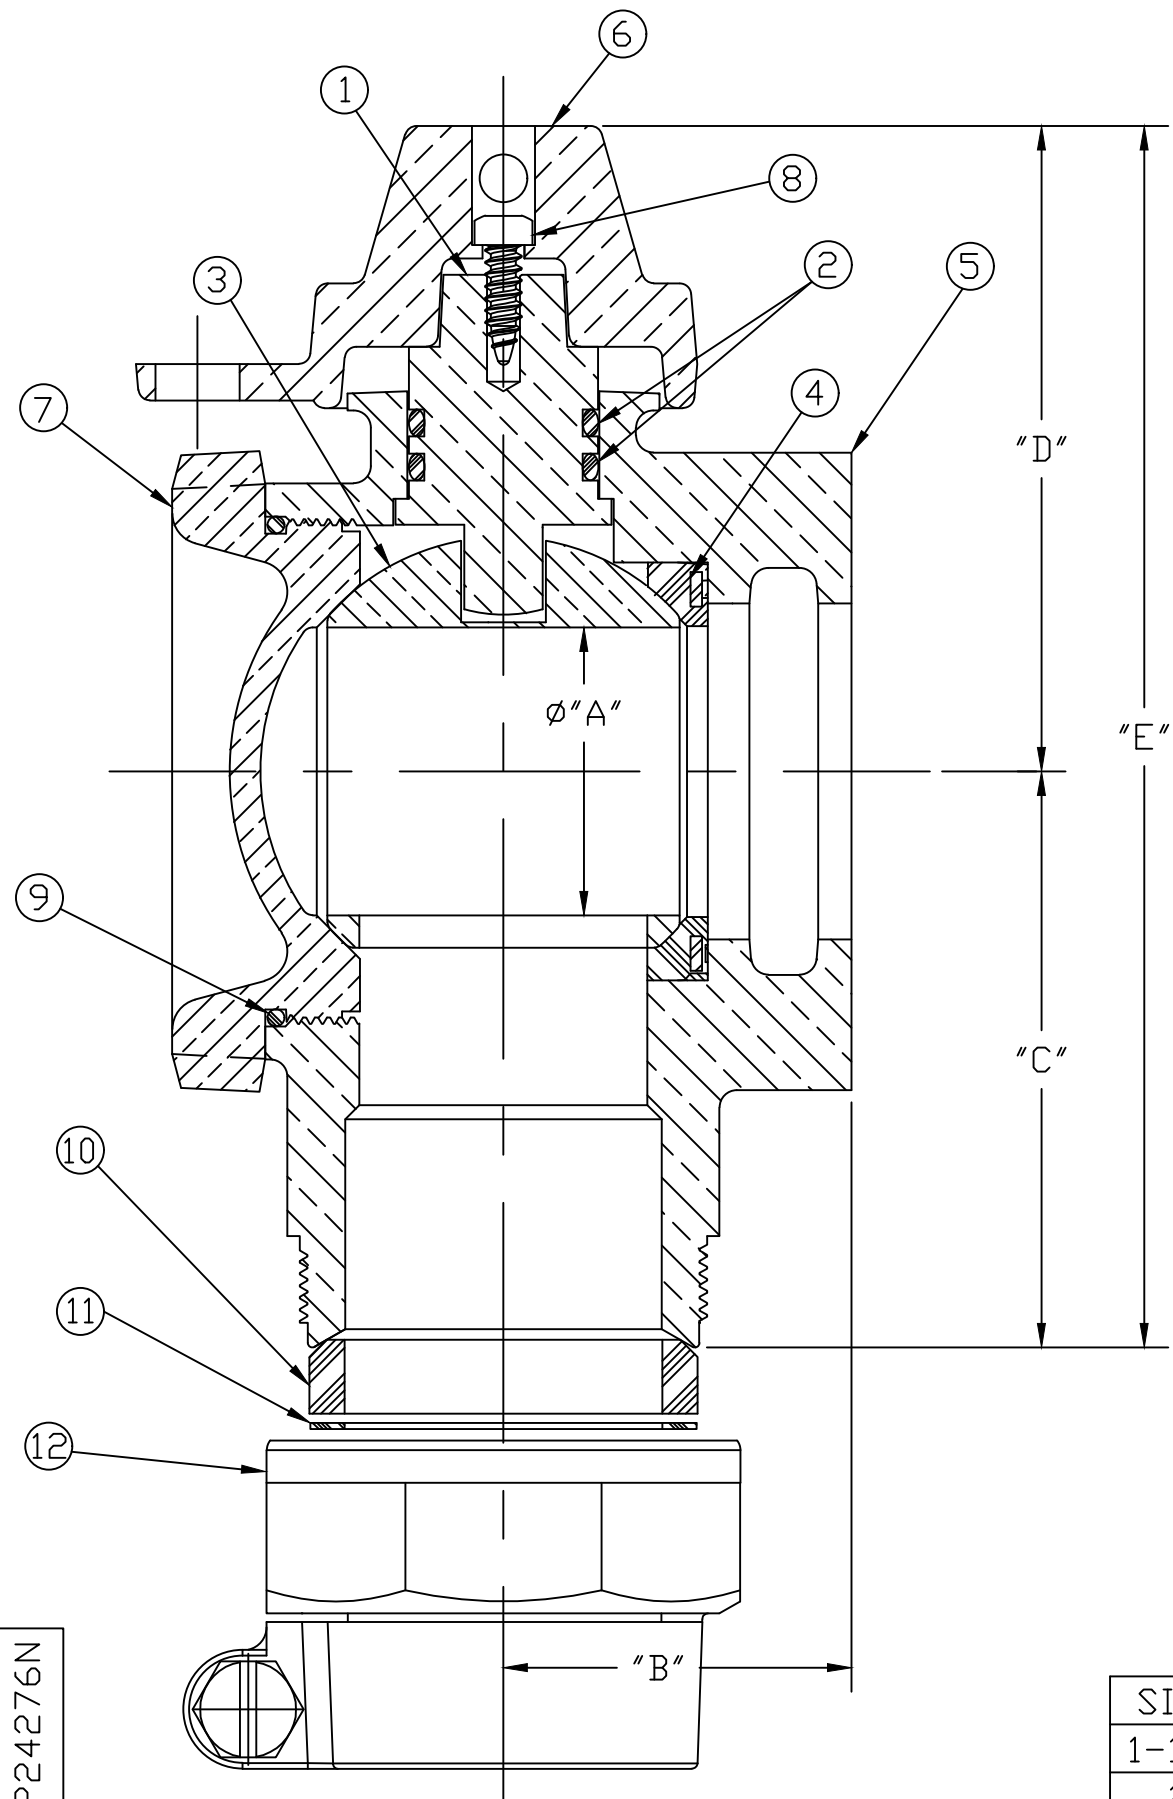

No.	QTY.	DESCRIPTION	MATERIAL
1	1	STEM	LEAD FREE BRASS ALLOY ASTM B584/B371
2	2	O-RING	EPDM D2000
3	1	BALL	LEAD FREE BRASS ALLOY ASTM B584
4	1	GASKET - SEAL	EPDM D2000
5	1	BODY	LEAD FREE BRASS ALLOY ASTM B584
6	1	CAP	CAST BRASS ALLOY ASTM B584
7	1	SEALING PLUG	LEAD FREE BRASS ALLOY ASTM B584
8	1	SCREW	410 STAINLESS STEEL
9	1	O-RING	EPDM D2000
10	1	PJ GASKET	EPDM D2000
11	1	PJ WASHER	POLYPROPYLENE
12	1	CLPG NUT SUB	CAST BRASS ALLOY ASTM B584

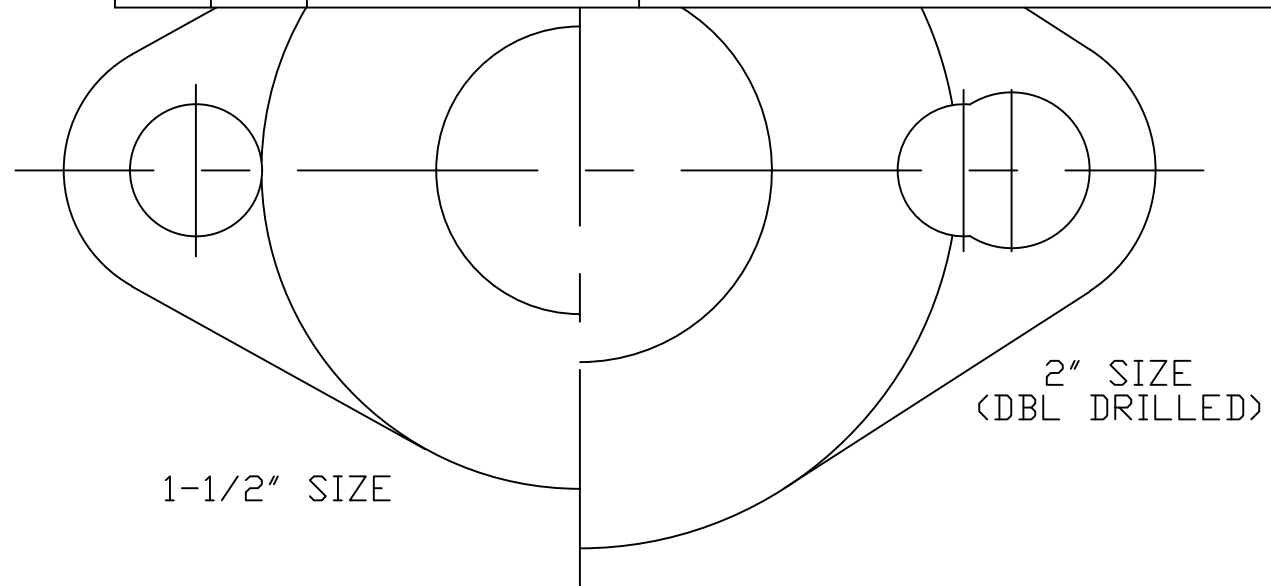

MEETS ALL REQUIREMENTS OF AWWA C800
ALL STEMS ARE LEAD FREE BRASS ALLOY C89833/C69300
ALL WETTED PARTS ARE LEAD FREE BRASS ALLOY C89833/C87850
ALL NON WETTED PARTS ARE BRASS ALLOY C83600/C87850

DRFTR	JGarvin	2/12/08	MUELLER	
CHKR				
ENGR			UNLESS OTHERWISE NOTED SURFACE PREPARATION: BREAK CORNER(S) ---- .000 SURFACE FINISH -- XX RMS	
MGR				
	BY	DATE	TOLERANCE(S): LINEAR ----- ± .000 ANGULAR ----- ± 0°00'	THIRD ANGLE PROJECTION REF. No. SCALE NONE
STK No:				
MAT'L:				
DESCR.			ANGLE METER BALL VALVE (PJ CTS x METER)	
			DWG NUMBER P24276N	

SIZE	ØA	B	C	D	E
1-1/2	1.50	1.81	3.00	3.53	6.53
2	2.00	2.19	3.78	4.22	8.00