


COPPER METER YOKES WITH VERTICAL INLET AND OUTLET


Mueller Co. **8A.11**

Rev. 9-09

8A - COPPER YOKES

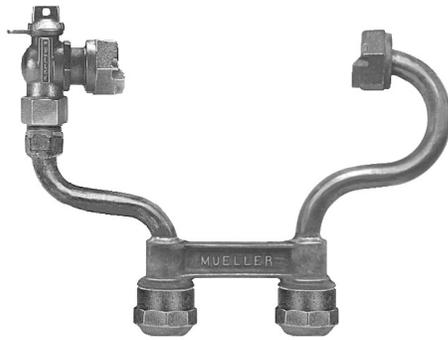

Yoke with integral MUELLER® 110° Conductive Compression Connection ends for CTS O.D. tubing (B-2474 shown)

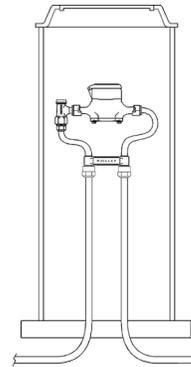

Typical installation of a vertical inlet and outlet copper meter yoke

Copper meter yokes with vertical inlet and outlet, and Mueller 110 Conductive Compression ends for CTS

Catalog number	H-1472	H-1473	H-1474	H-1475	B-2474	B-2475
Description	Plain yoke	With test valve	With lock wing <input type="checkbox"/> ground key angle <input type="checkbox"/> meter stop	With lock wing <input type="checkbox"/> ground key angle <input type="checkbox"/> meter stop and <input type="checkbox"/> test valve	With lock wing <input type="checkbox"/> MUELLER 300™ <input type="checkbox"/> Angle Ball Valve*	With lock wing <input type="checkbox"/> MUELLER 300 <input type="checkbox"/> Angle Ball Valve* <input type="checkbox"/> and test valve



M-98™ ASSE approved top entry vertical check valve


Check valve options

MUELLER Copper Meter Yokes can be ordered with one of the following: an ASSE approved top entry vertical check valve; an ASSE approved dual check valve; a dual check valve (ASSE non-approved). To order the ASSE approved top entry check feature, add a suffix of **-6A** to the yoke catalog number; add **-6D** for the same check with a test drain. For the dual check feature, add a suffix of **-2A** to the yoke catalog number for the ASSE approved model or **-2** suffix for the nonapproved model. Examples: **B-2474-6D** for the ASSE approved top entry vertical check with a test drain; **B-2474-2A** for the ASSE approved model angle dual check valve.



Angle dual check valve

Dimensions



Meter size	5/8"*	5/8" x 3/4"*	3/4"*	1"*
Nominal size of I.P. thread in meter nut	3/4"	1"	1"	1-1/4"
Dimension A	1-1/16"	1-5/16"	1-5/16"	1-5/8"
Dimension B	7-7/8"	7-7/8"	9-3/8"	11-1/8"
Dimension C - nominal pipe size of inlet and outlet	3/4"	3/4"	3/4"	1"
Dimension D	4"	4"	5"	6"
Dimension E	12-5/8"	12-5/8"	14-1/4"	17-1/4"
Dimension F	6-7/8" (9"**)	6-7/8" (9" **)	8-1/4" (10" **)	10-3/16" (12" **)

* Add "R" to the end of the yoke catalog number to order a reduced port Angle Ball Valve; EXAMPLE: 5/8x3/4x7 B-2474R.
** With 6A or 6D option.

Note: the 5/8", 5/8" x 3/4" and 3/4" sizes are furnished with a tie bar on heights greater than 15". The 1" size is furnished with a tie bar on heights greater than 18".

SPECIFY METER SIZE, RISER HEIGHT AND CATALOG NUMBER.