



Mueller® A-403 Super Centurion® Fire Hydrant

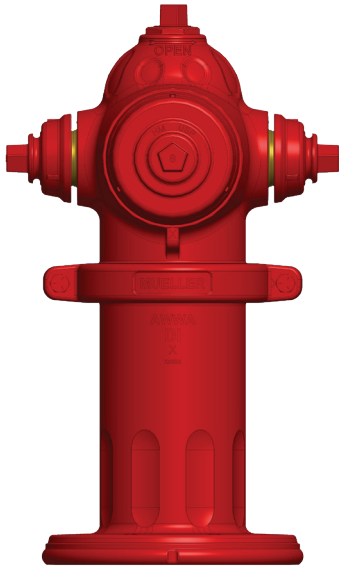

The A-403 Super Centurion features a two-piece ductile iron upper barrel with a nozzle section that can be separated from the traffic section by removing two high strength bolts, making seat replacement or traffic repair simple and quick. The A-403 has a traffic flange, 5-1/4" fully encapsulated, reversible main valve, a durable polyurethane top coat, and automatic oil lubrication. In addition, all internal components, nozzles and repair parts are fully interchangeable with the Super Centurion 250 hydrant.

Initially, the A-403 is available with a 5-1/4" main valve and a 3-way opening configuration (2 hose nozzles / 1 pumper nozzle). This lightweight dry barrel fire hydrant is certified UL/AWWA at 350 psi operating pressure and factory tested to 700 psi.

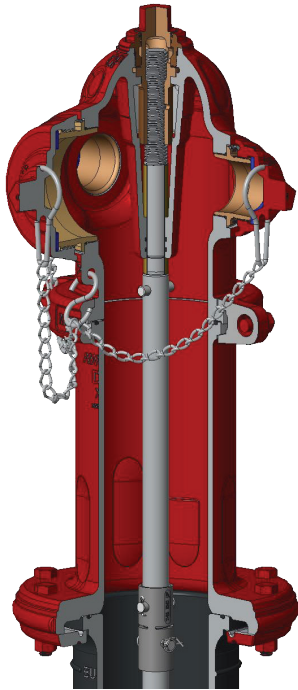

- **Installed & maintained by one person**
- **Simple, quick seat replacement and traffic repair**
- **350 psi operating pressure**
- **AWWA C502 compliant**
- **5-1/4" fully encapsulated, reversible main valve**
- **Durable polyurethane top coat**
- **Automatic oil lubrication**
- **Components fully interchangeable with Super Centurion 250 hydrant**
- **Certified to ANSI/NSF 61 & 372**

For more information, contact your local Authorized Mueller Distributor, or contact a Mueller Sales Representative – find the one serving your area by visiting www.muellercompany.com, or contact our Customer Service Center at 800-423-1323.



Mueller Co., LLC
1200 Abernathy Road, NE, Suite 1200
Atlanta, GA 30328
www.muellercompany.com
moreinfo@muellercompany.com

Toll Free: 1.800.423.1323
Canada: 1.705.719.9965
International: 1.423.490.9555