



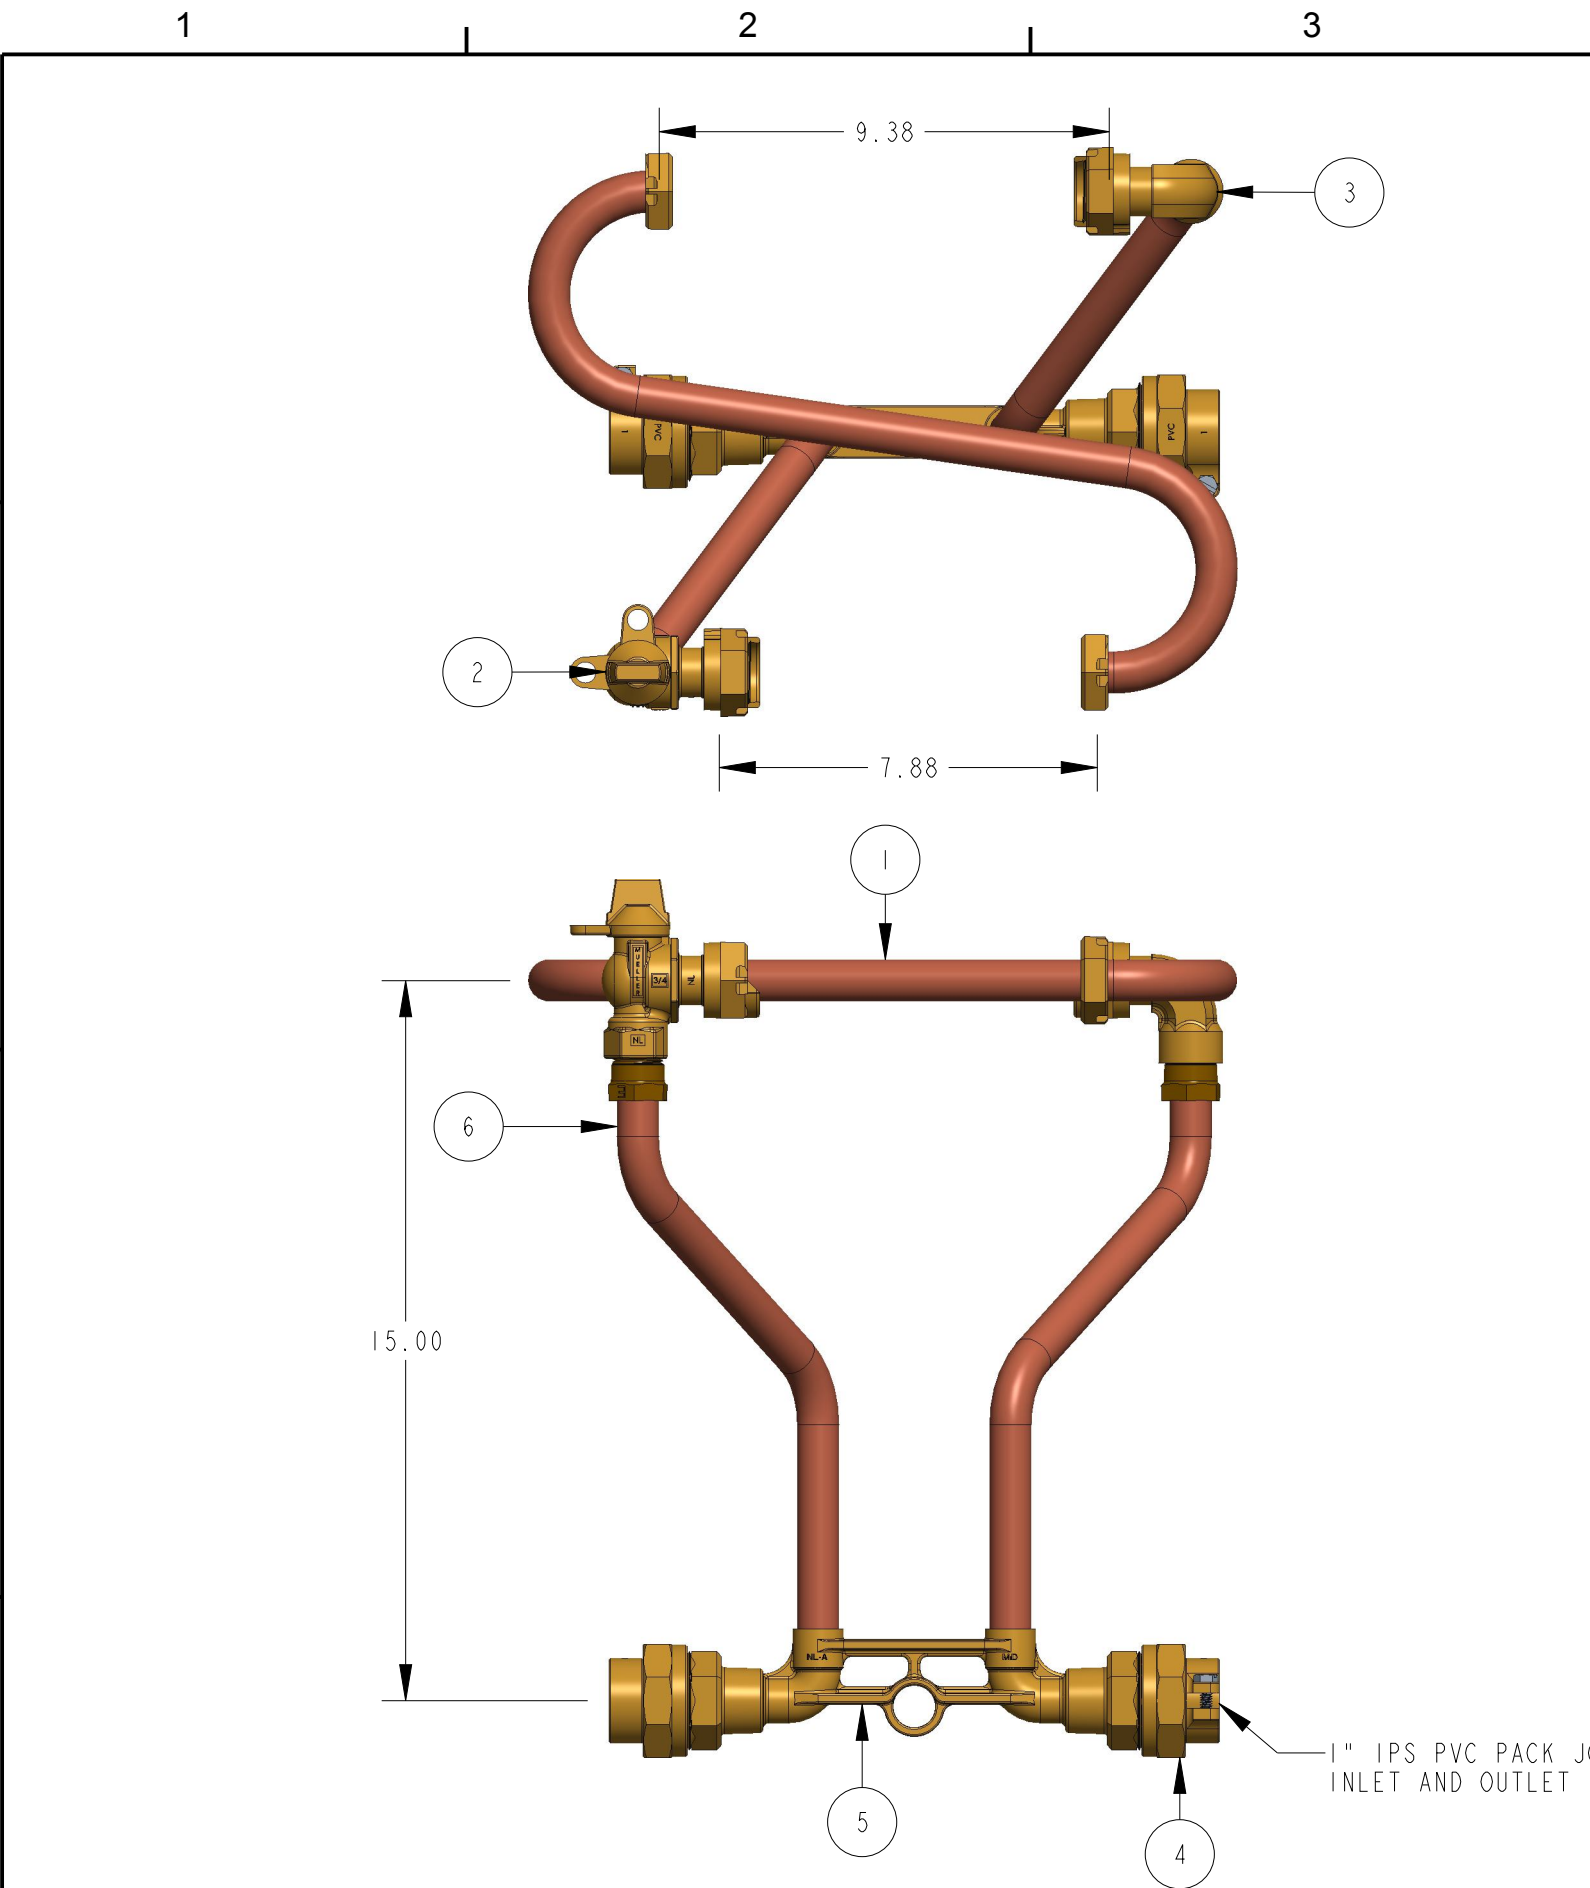

ITEM NO	PART NUMBER	QTY	DESCRIPTION	MATERIAL
1	682405	1	3/4" SPACER TUBE SUB ASSEMBLY	SOFT COPPER TUBING ASTM B75 UNS C12200, O50 TEMPER
2	215B2426551N	1	5/8" X 3/4" FULL PORT BALL VALVE	LEAD FREE BRASS ALLOY ASTM B584 C89833/C87850
3	215H14210	1	5/8" X 3/4" METER COUPLING (SWIVEL NUT)	LEAD FREE BRASS ALLOY ASTM B584 C89833/C87850
4	333VI5442N	2	1" X 3/4" PACK JOINT SERVICE FITTING	LEAD FREE BRASS ALLOY ASTM B584 C89833/C87850
5	532081E	1	METER BAR WITH 3/4" NPT LLB	LEAD FREE BRASS ALLOY ASTM B584 C89833/C87850
6	682453E	2	RISER SUB ASSEMBLY	SOFT COPPER TUBING ASTM B75 UNS C12200, O50 TEMPER

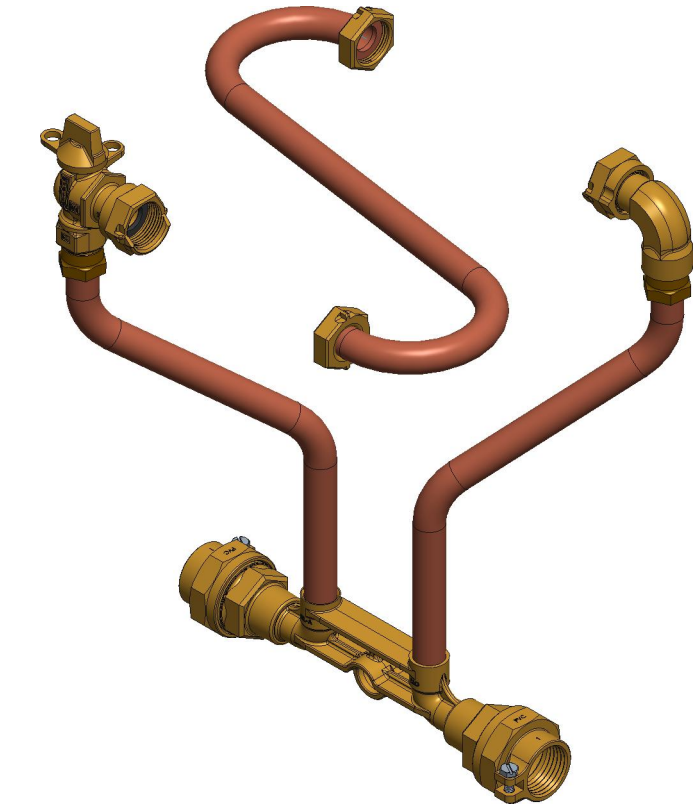

OPTION CODE: 60

*TANDEM FOR WILKINS 600XLDM

*VI5442 333N INSTALLED ON INLET AND OUTLET

REVISIONS					
REV	ECR	DESCRIPTION	DRAWN BY	DATE	APPROVED
A		DRAWING CREATED	AOS	5/23/25	

TITLE TO AND OWNERSHIP OF THIS ENGINEERING DATA REMAINS IN Mueller Co. ASSENT ON THE PART OF THE RECIPIENT TO THESE CONDITIONS IS PRESUMED.

INTERPRET THIS DRAWING IN ACCORDANCE WITH ASME Y14.5 2018		NAME	DATE	THIRD ANGLE PROJECTION 		
		DRAWN BY	AOS			5/23/25
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. MACHINING TOLERANCES: .X ±.1 .XX ±.015 .XXX ±.005 ANGULAR CORNER BREAK FINISH ±1° .015/.025 125 µin. RA	D.E. APPR.				
		M.E. APPR.				
		Q.A. APPR.				
DO NOT SCALE DRAWING						
MATERIAL:				TITLE: 3/4" COPPER METER SETTER 15" RISER HEIGHT LEAD FREE BRASS		
				SIZE B	DWG. NUMBER 312B2434----60N	
				REV		
STK NUMBER:	REF.NO.			SCALE:	WT:	
				SHEET 1 OF 1		