
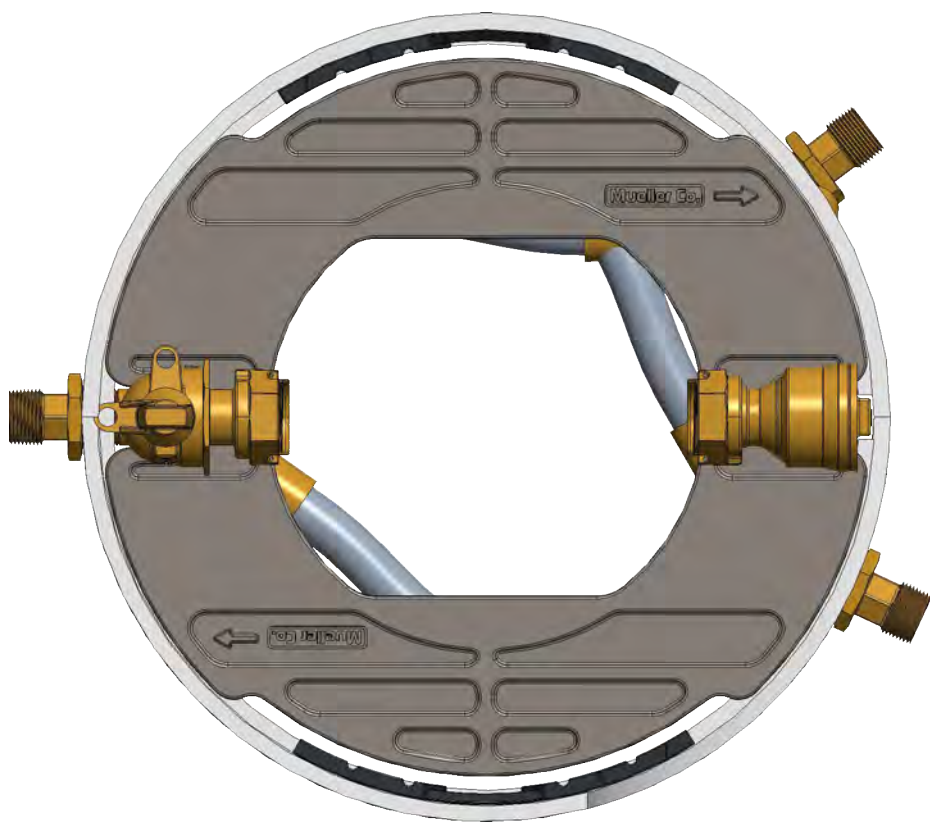
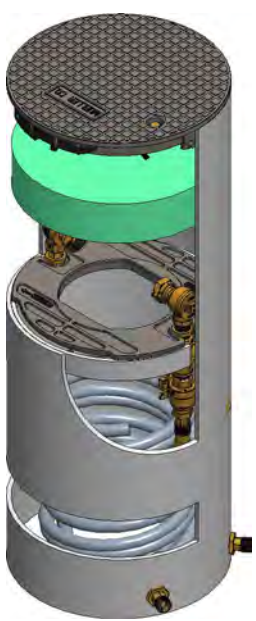
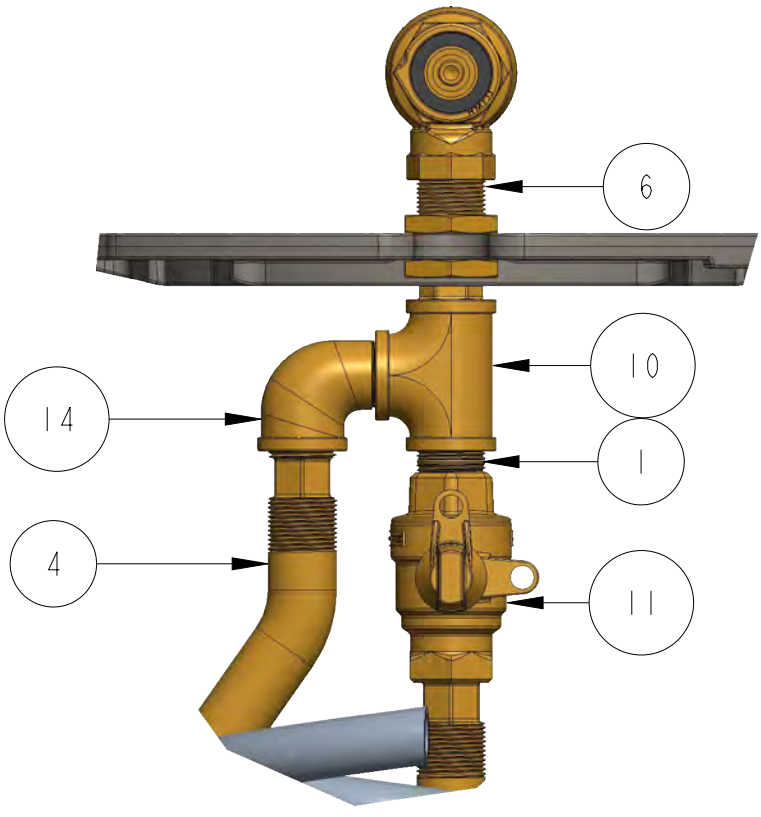


330CS1848XSBS000562N

ITEM NO	PART NUMBER	QTY	DESCRIPTION	MATERIAL
1	047139	1	1" X 1-1/2" CLOSED NIPPLE	RED BRASS ASTM B43 ALLOY C23000 O61 TEMPER ANNEALED
2	311955	1	18" DIA SIDE LOCKING COMPOSITE LID (SOLD SEPARATELY)	COMPOSITE MATERIAL
3	311968	1	18-10 ABS PLATFORM	PLASTIC VIRGIN POLYLAC, PA747 ABS BLACK RESIN OR PROOFED EQUIVALENT RESIN
4	700014	6	1" HOSE CONNECTOR	RED BRASS ASTM B43 ALLOY C23000 O61 TEMPER ANNEALED
5	700046-1848	3	1" COIL PART	POLYBUTYLENE RESIN BASELL AKOALIT PB4267 OR 4237 GREY
6	700581	1	1" X 3-3/4" NIPPLE WITH FLATS	RED BRASS ASTM B43 ALLOY C23000 O61 TEMPER ANNEALED
7	780021-1848	1	SHELL SUB ASSEMBLY	SDR-51 PVC PIPE ASTM D2241 GRADE 1120
8	790010	10	1" HEX NUT	ASTM B16 ALLOY C36000
9	790153	1	18" INSULATION PAD (SOLD SEPARATELY)	ETHAFOAM 220 WHITE OR POLYLAM 1.7 DENSITY WHITE
10	094986E	1	1" FNPT THREADED TEE	ASTM B62 ALLOY C83600 OR ASTM B16 ALLOY C36000
11	330B20200N	1	1" INLINE BALL VALVE	LEAD FREE BRASS ALLOY ASTM B584 C89833/C87850
12	330B242653N	1	1" FULL PORT 360 BALL VALVE	LEAD FREE BRASS ALLOY ASTM B584 C89833/C87850
13	330H14244-A	1	1" ANGLE DUAL CHECK ASSE APPROVED	LEAD FREE BRASS ALLOY ASTM B584 C89833/C87850
14	790052E	1	1" STREET ELBOW	ASTM B584 ALLOY C89520 OR C89833

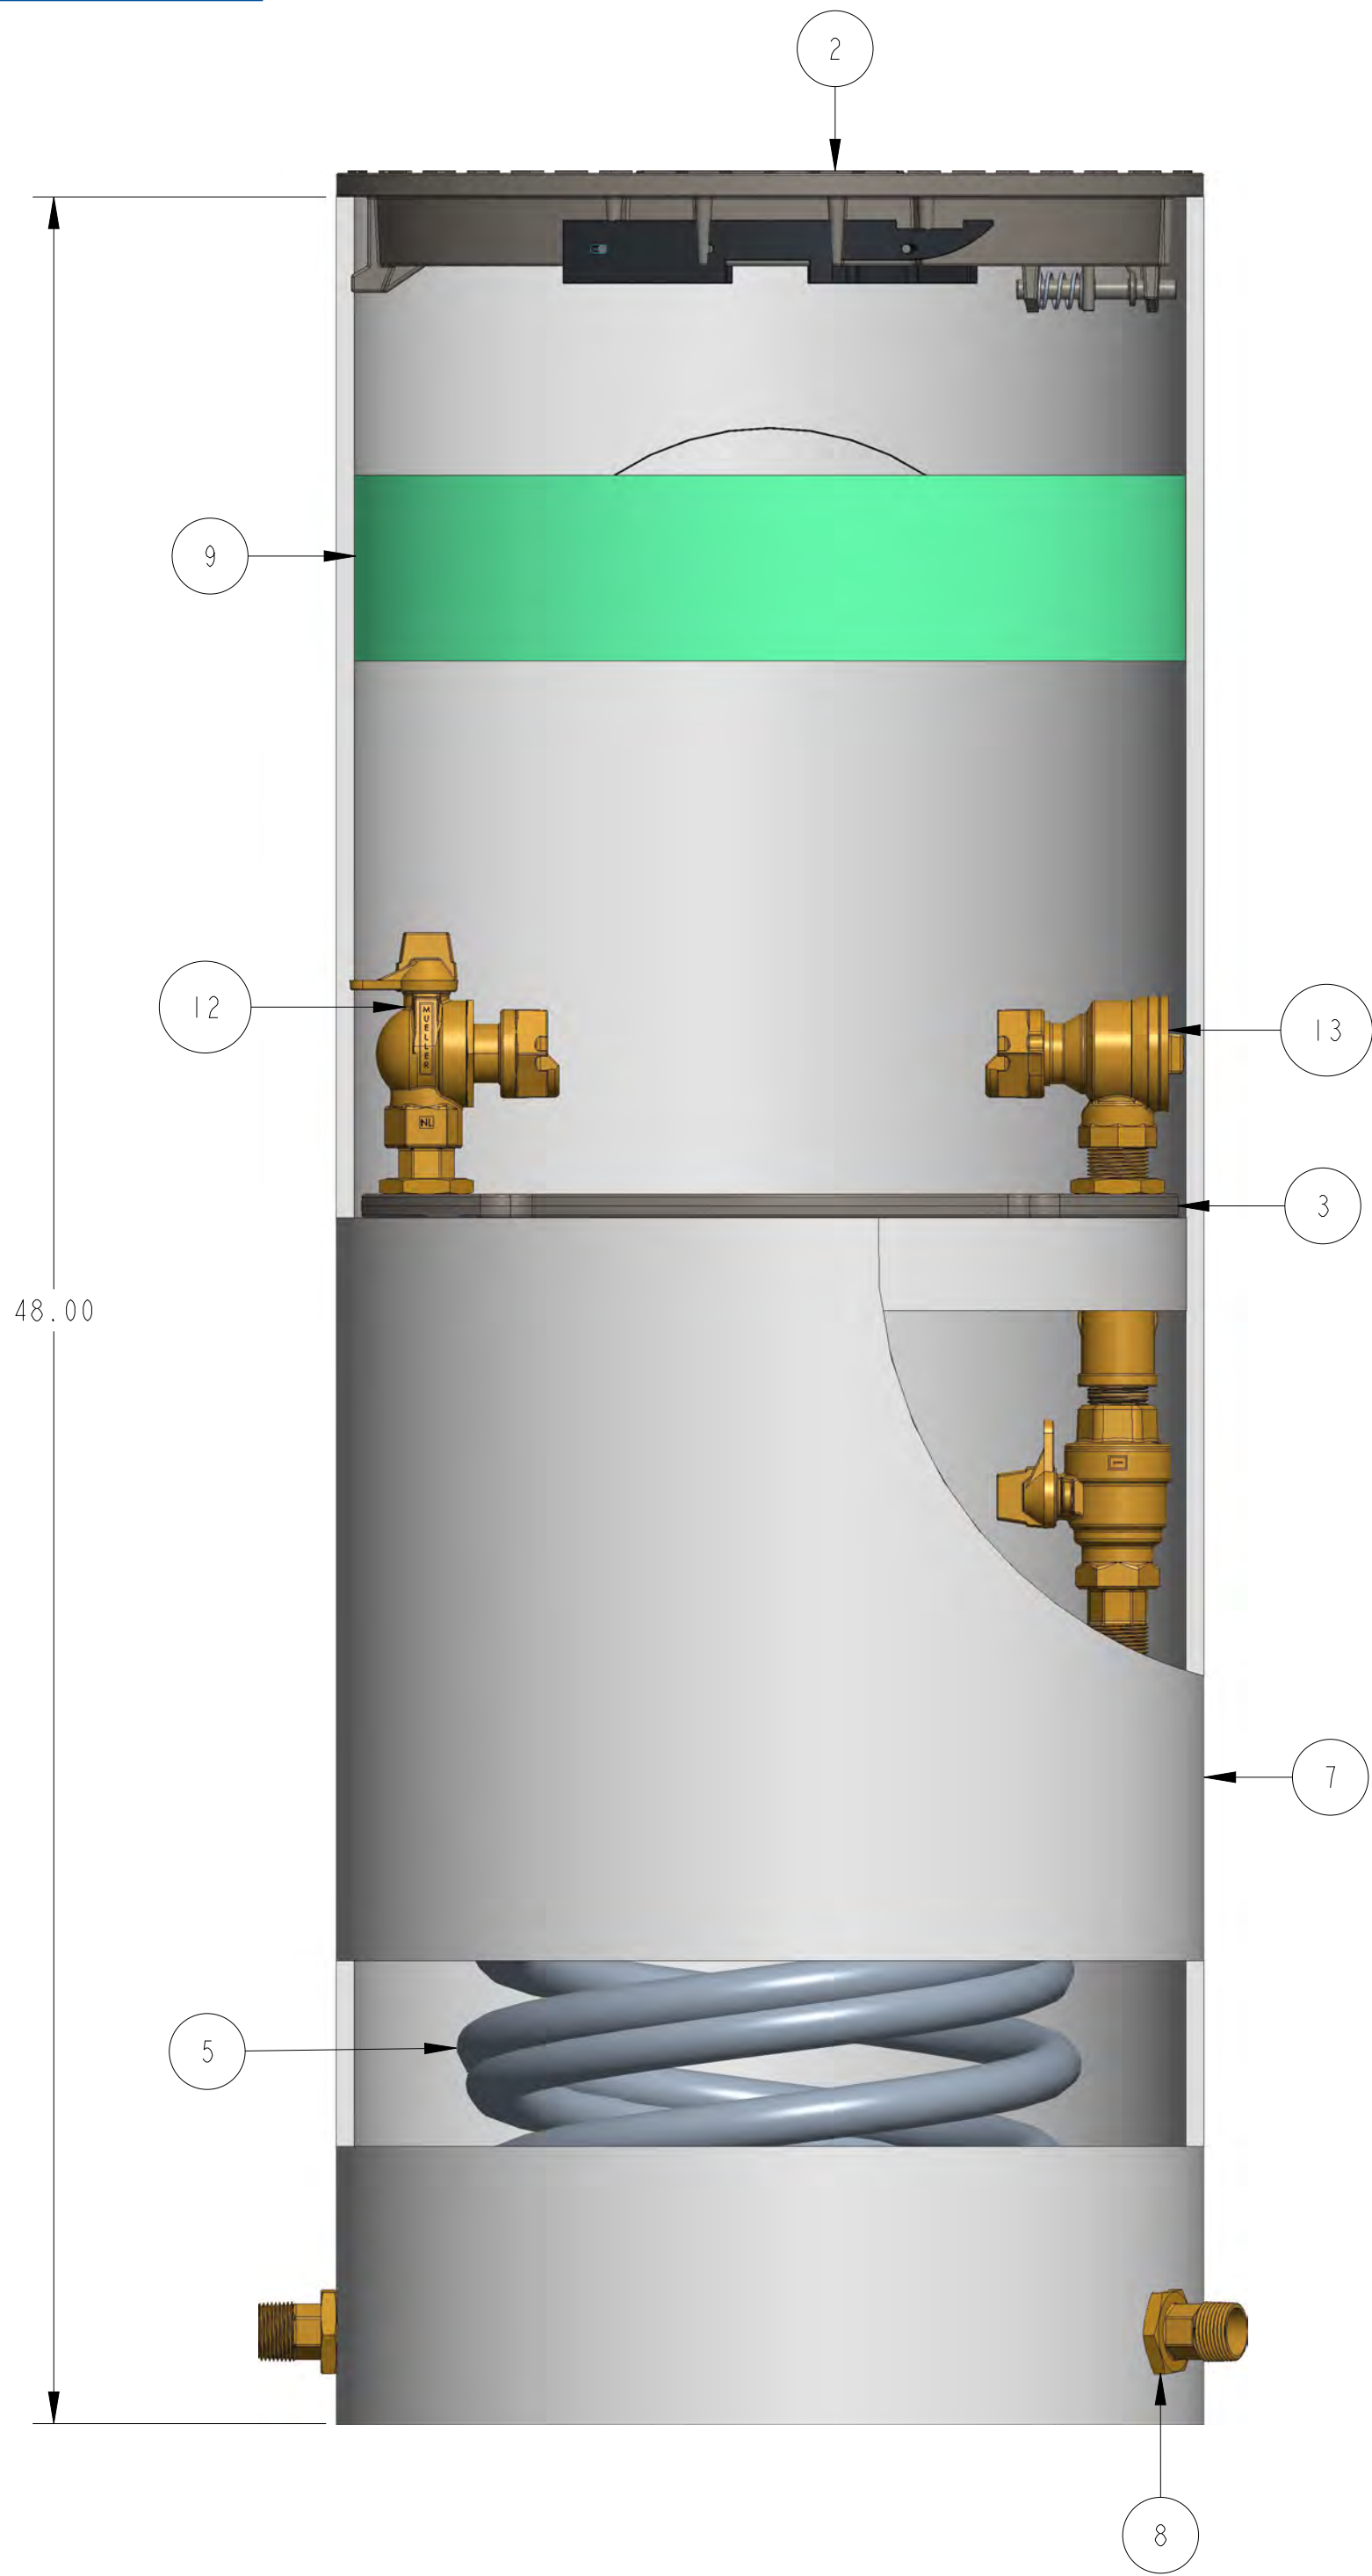

OPTION CODE 562:
*FIRELINE PIT WITH 1" INLET AND TWO 1" OUTLETS
*INLINE BAL VALVE ON FIRELINE ONLY

DR. BY	AOD	UNLESS OTHERWISE NOTED	THIRD ANGLE PROJECTION	C.B. NO.
CHKR		BREAK CAST CORNER(S)---		
ENGR		BREAK MACH CORNER(S)---	PURCH.	PATT. NO.
MGR		TOLERANCES	FINISH	
MFG		UNLESS OTHERWISE NOTED	REF. NO.	SCALE
TOOL		LINEAR	STR. NO.	
FDY		ANGULAR		
MAT'L				
MUELLER		DESCR.	NUMBER	
			330CS1848XSBS000562N	