

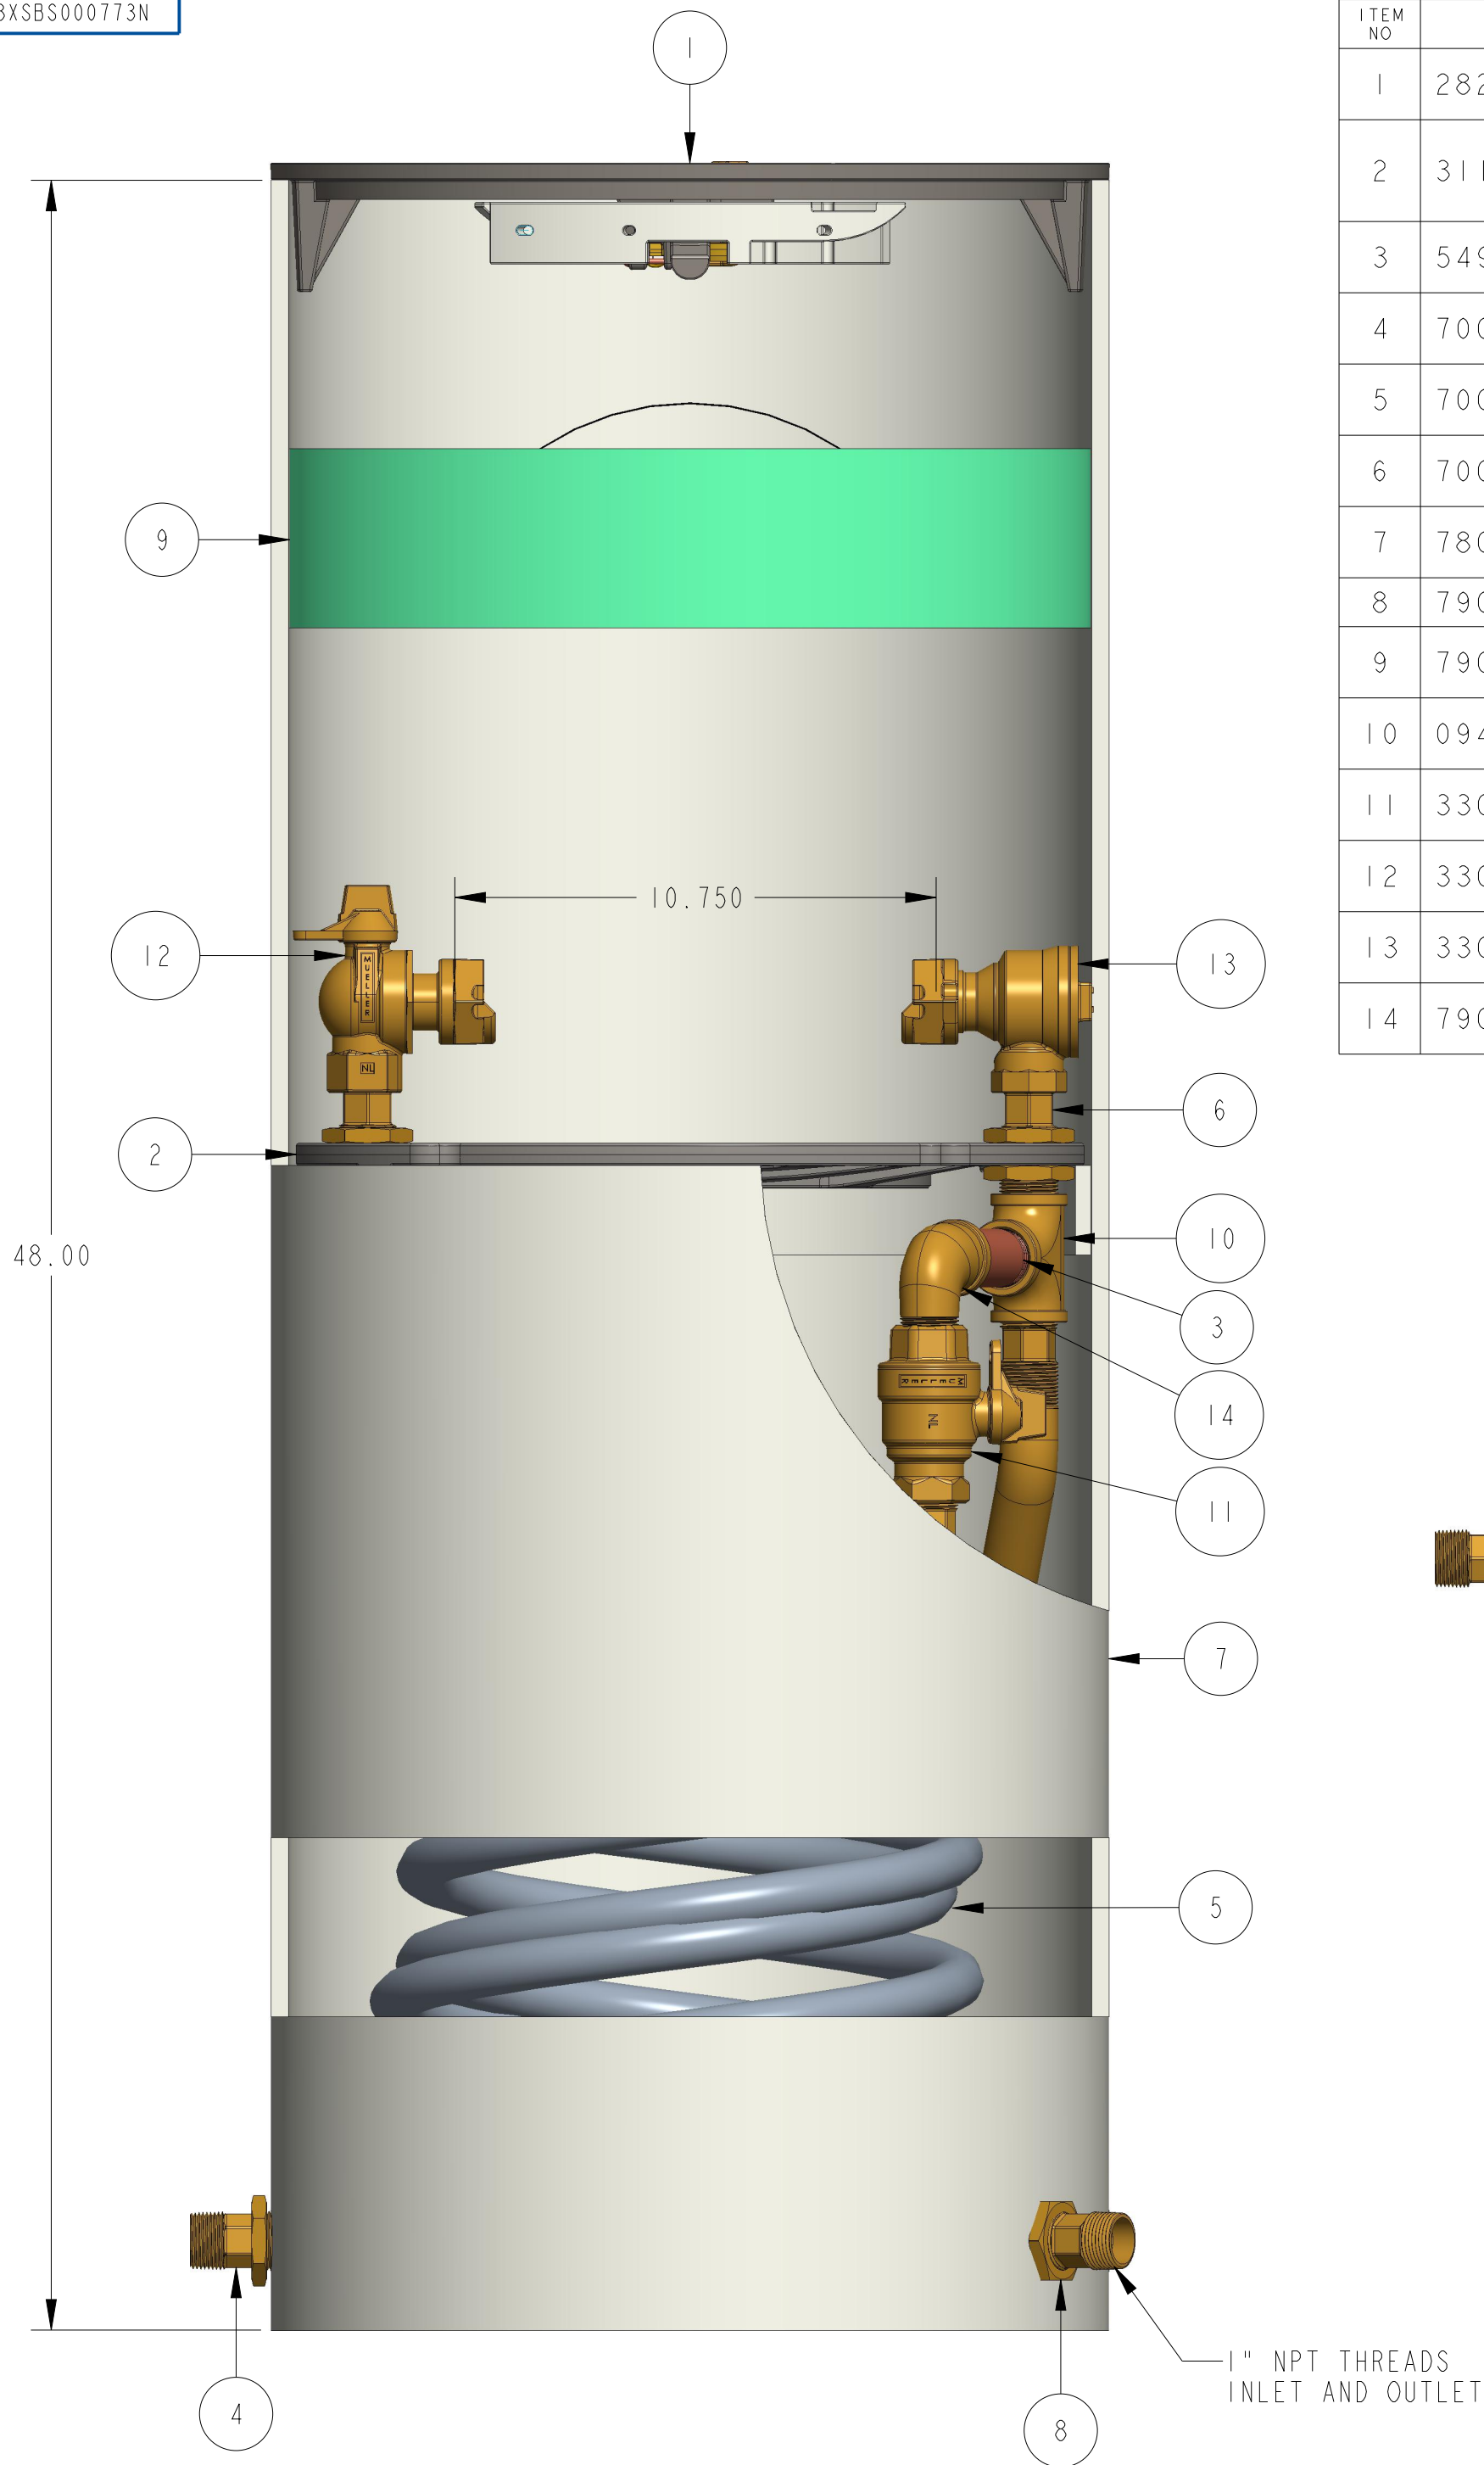


330CS1848XSBS000773N

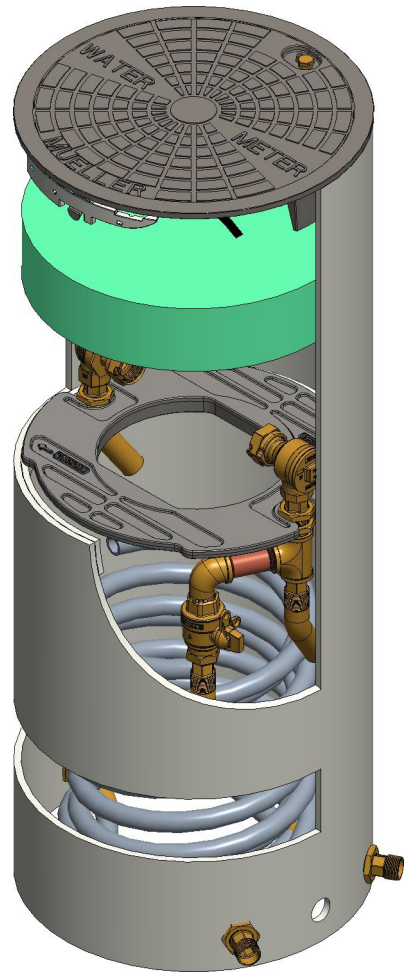

ITEM NO	PART NUMBER	QTY	DESCRIPTION	MATERIAL
1	282925	1	18" DIA CAST IRON SIDE LOCKING LID (SOLD SEPARATELY)	CAST IRON ASTM A126 CLASS B
2	311968	1	18-10 ABS PLATFORM	PLASTIC VIRGIN POLYLAC, PA747 ABS BLACK RESIN OR PROOFED EQUIVALENT RESIN
3	549976	1	NIPPLE 1" X 5-1/2"	RED BRASS ASTM B43 ALLOY C23000 O61 TEMPER ANNEALED
4	700014	6	1" HOSE CONNECTOR	RED BRASS ASTM B43 ALLOY C23000 O61 TEMPER ANNEALED
5	700046-1848	3	1" COIL PART	POLYBUTYLENE RESIN BASELL AKOALIT PB4267 OR 4237 GREY
6	700581	1	1" X 3-3/4" NIPPLE WITH FLATS	RED BRASS ASTM B43 ALLOY C23000 O61 TEMPER ANNEALED
7	780029-1848	1	SHELL SUB ASSEMBLY	SDR-51 PVC PIPE ASTM D2241 GRADE 1120
8	790010	10	1" HEX NUT	ASTM B16 ALLOY C36000
9	790153	1	18" INSULATION PAD (SOLD SEPARATELY)	ETHAFOAM 220 WHITE OR POLYLAM 1.7 DENSITY WHITE
10	094986E	1	1" FNPT THREADED TEE	ASTM B62 ALLOY C83600 OR ASTM B16 ALLOY C36000
11	330B20200N	1	1" INLINE BALL VALVE	LEAD FREE BRASS ALLOY ASTM B584 C89833/C87850
12	330B242653N	1	1" FULL PORT 360 BALL VALVE	LEAD FREE BRASS ALLOY ASTM B584 C89833/C87850
13	330H14244AN	1	1" ANGLE DUAL CHECK ASSE APPROVED LLB	LEAD FREE BRASS ALLOY ASTM B584 C89833/C87850
14	790052E	1	1" STREET ELBOW	ASTM B584 ALLOY C89520 OR C89833

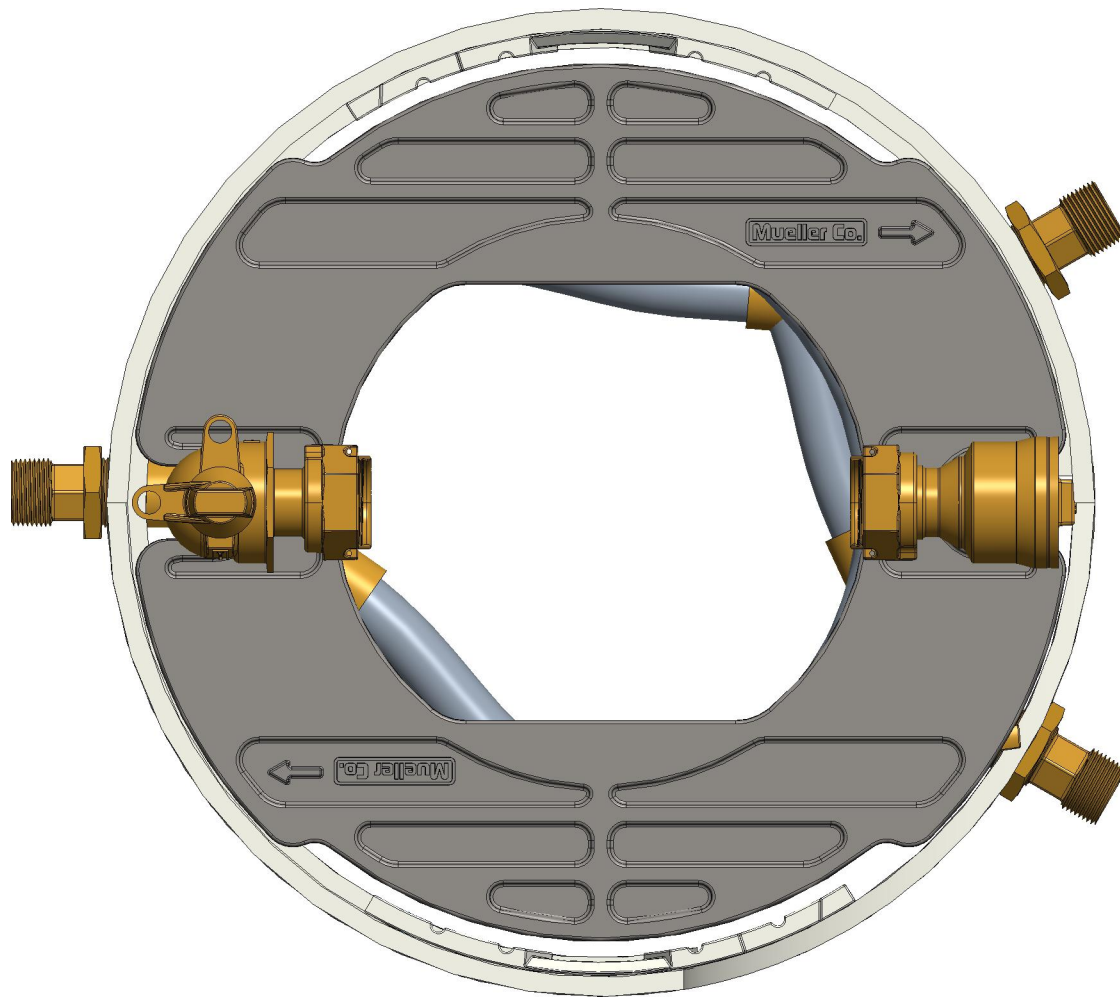

OPTION CODE 773:

- *FIRELINE PIT FOR 1" METER
- *WITH 1" INLET AND (2) 1" OUTLETS
- *DOMESTIC OUTLET HAS INLINE SHUT-OFF VALVE
- *FIRELINE OUTLET CONTAINS NO EXTRA VALVE

DR. BY	AOS	10/19/23	UNLESS OTHERWISE NOTED	THIRD ANGLE PROJECTION	C.B. NO.
CHKR			BREAK CAST CORNER(S)---		
ENGR			BREAK MACH CORNER(S)---	PURCH.	FINISH
MGR			TOLERANCES	REF. NO.	SCALE
MFG			UNLESS OTHERWISE NOTED	STR. NO.	
TOOL			LINEAR	ANGULAR	
FDRY			±	±	
MAT'L:					
			DESCR. 1" COIL SINGLE METER PIT 18" DIA X 48" DEPTH LEAD FREE BRASS	NUMBER	330CS1848XSBS000773N